# **LeonLite**®

# LeonLite® Path Lighting Premium USDL-H 22.5" Brass Path Lights - Lamp Ready

ZZ1LSLBO-USDL-H-B







## **WARRANTY & RATING**



#### **SPECIFICATIONS**

Wattage: 20W maxVoltage: AC/DC 9-24VLuminous Flux: N/A

• Beam Angle: N/A

Color Rendering Index (CRI): N/A

Lifespan: N/A

• Light Source: G4 4mm (Socket: GU5.3)

• Color Temperature (CCT): N/A

Waterproof Rating: wet locations

• Operating Temperature: -10 to 50°C (-14 to

122°F)

• Material: Brass

### PRODUCT DESCRIPTION

Constructed from durable solid brass, this fixture supports a G4 lamp and features corrosion-resistant internal components, ensuring peak performance for years. Featuring a unique cut-out design on the lampshade, this lighting fixture not only fulfills its role in pathway or area illumination but also creates decorative light and shadow effects, adding visual interest and variety to garden lighting.

### **FEATURES & BENEFITS**

- Complies with ETL standards.
- Made from solid cast brass with a patinated bronze finish for superior heat dissipation and corrosion resistance.
- Beryllium copper socket for optimal corrosion resistance.
- Lamp ready with a GU5.3 bi-pin socket, optimized for G4 4MM bulbs up to 20W.
- The underside of the lampshade is coated with white reflective paint to achieve higher light output.
- Unique cut-out lampshade design serves as a decorative garden accent, whether lit or unlit.

# LeonLite® Path Lighting Premium USDL-H 22.5" Brass Path Lights - Lamp Ready

ZZ1LSLBO-USDL-H-B

# **POWER AND ELECTRICAL FEATURES**

- Product complies with ETL standards, features ULcertified wiring, and an ETL-certified ceramic socket.
- The product is designed to be compatible with both halogen lamps and LED G4 bulbs, though the bulbs are not included. It accommodates a maximum wattage of 20W for both halogen and LED bulbs.
   The working voltage is AC/DC 9-24V.
- The wiring is comprised of brass material. The exposed power cord uses 18# SPT-1W wire, with a length of approximately 3.28 feet, the end of which is stripped by 0.39 inches and tinned.

### **DESIGN AND STRUCTURE**

- The light fixture is made of brass with a pre-aged bronze finish that will develop a natural and beautiful patina over time.
- 1" diameter thick pole with machine threading tightened onto an O-ring, coupled with a silicone plug to seal the lead-out opening, ensuring a moisture-proof seal.
- Separate bulb and fixture design offers longer lifespan than integrated LED units, allowing bulb replacement without discarding the entire fixture.
- If a patio or garden features expansive lawns without distinct landscapes, utilizing lights with a unique cut-out lampshade design can effectively alleviate monotony by adding decorative accents.


### ADDITIONAL COMPONENTS

ABS ground spike

### LED AND OPTICAL PERFORMANCE

 The fixture features a drop-in light source with a GU5.3 socket, compatible with G4 4MM pin bulbs (bulbs not included).

### PRODUCT DIAGRAM

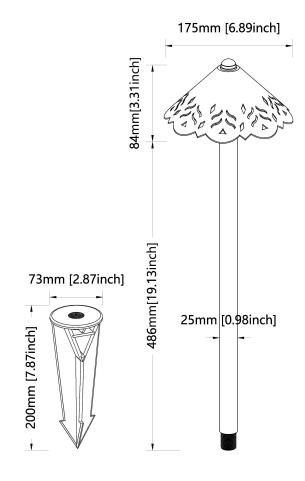

Size in mm 1" = 25.4mm.