

Features

- Premium CREE XP-G Q5 LED
- Maximum output of 250 lumens
- Maximum runtime of up to 4.5 hours on high mode
- Water, dust and impact resistant.
- Multiple output modes are conveniently accessed via button switch
- User-defined mode provides customized brightness levels plus strobe
- Constructed from aerospace-grade aluminum alloy

Included Items

- 3 x AAA Batteries
- 1 x Wrist Lanyard
- User Manual, Warranty Card

Optional Accessories

- GOVOLT® Tactical Filter Kit

Dimensions

- Head Diameter: 1.38" / 35mm
- Tail Diameter: 1.14" / 29mm
- Length 4.84" / 123mm

Maintenance

Every 6 months, threads should be wiped with a clean cloth followed by a thin coating of silicon-based lubricant.

Warranty Service

All GOVOLT® products are warranted for quality. DOA / defective products can be exchanged for replacement through a local distributor/dealer within the 14 days of purchase. After 14 days, all defective / malfunctioning GOVOLT® products will be repaired free of charge for a period of 18 months from the date of purchase. After 18 months, a limited warranty applies, covering the cost of labor and maintenance, but not the cost of accessories or replacement parts.


The warranty is nullified in all of the following situations:

1. The product(s) is/are broken down, reconstructed and/or modified by unauthorized parties.
2. The product(s) is/are damaged through improper use.
3. The product(s) is/are damaged by leakage of batteries.

For full terms visit the warranty section at www.govolt.com

For the latest information on GOVOLT® products and services, please visit govolt.com, contact your national GOVOLT® distributor, or send an email to service@govolt.com.

OPERATING INSTRUCTIONS

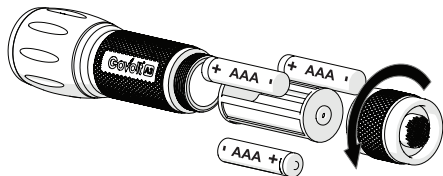

BATTERY INSTALLATION (see above diagram)

1. Unscrew the end cap in a counter-clockwise direction.
2. Remove battery harness
3. Insert three AAA alkaline battery into harness
4. Insert battery harness into flashlight.
5. Screw back the end cap in a clockwise direction

NOTE: Ensure batteries are inserted with the positive (+) end pointing towards the correct direction. The A3 will not operate with incorrectly inserted batteries

SWITCHING ON/OFF

TO SWITCH ON: Press the green button on the end cap until a "Click" is heard.

TO SWITCH OFF: Press the green button on the end cap a second time until a "Click" is heard.


MODE SWITCHING

The A3 has 3 modes: High, Low, and Strobe.

These 3 modes can be changed by lightly pressing the green button on the End Cap.

ZOOM FUNCTION

To focus or widen the beam, simply pull or push the Head towards or away from the main body of the flashlight.

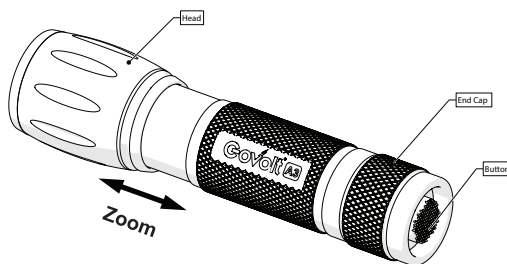

PERFORMANCE SPECIFICATIONS

FL1 STANDARD	HIGH	MEDIUM	STROBE
	250 LUMENS	75 LUMENS	125 LUMENS
	4h30min	7h30min	5h 15 min
	230m (Beam Distance)		
	13000cd (Peak Beam Intensity)		
	1.5 m (Impact Resistant)		
	IPX-5 (water Resistant)		

Govolt® A3

High Powered LED Flashlight

USER MANUAL



WWW.GOVOLT.COM

Govolt®

ZURCO®

TEL: 888-778-2823

E-mail: info@govolt.com

Address: 2445 Hilton Drive, Suite 126
Gainesville, Georgia 30501

Designed In USA
Made In China

