

- 4 channels (2HD/2SD or 1HD/3SD) 8VSB RF output
- PSIP/PSI descriptors generator/injector with VCT
- Remultiplexer with PID editor, ASI injection, remap, restamp, grooming, and add-drop
- MPEG2/MPEG4 video encoding
- Full color touchscreen display, with Ethernet and SNMP
- Internal RF isolator, efficient switching power supply
- EAS input and control through GPI or SNMP
- Dynamic PSIP input from any external EIT EPG generator
- Excellent video quality and lower bitrates through triple pass video motion estimation
- 2 Year Warranty on Amplifier
- 1 Year Warranty on Modulator
- ATSC 3.0 Available on Select Modulators

This system includes: TAUD-1000 Amplifier, TP1000 4 channel Encoder/Mux/Modulator

Note: Other configurations available:

- TP1800 Transmodulator 4-8VSB In, 1 Agile 8VSB Output
- TM900 Agile Adaptive Digital Modulator ATSC 1.0/3.0
- TM500 Low Cost Digital Modulator

AUDIO / VIDEO INPUT CHARACTERISTICS

Digital Audio Inputs	SDI embedded – (1) stereo pair or pass through compressed
Digital Audio Format	Selectable Dolby Digital / AC3 / Stereo / 5.1-7.1 pass-through / MPEG2 / AAC
Analog Audio Inputs	Optional AV/L-R balanced-unbalanced audio embedded available upon request
Digital Video Inputs	(4) HD / SD SDI with embedded audio
Analog Video Inputs	Optional CVBS / Component / HDMI / VGA / DVI adapter available upon request
Input Resolution	Auto detect any resolution
Video Scaler	Scaler function can be selected on standard software to scale the input to lower resolution for matching
Encoding Modes	MPEG2 / MPEG4 H264 selectable by software per each channel
Encoding Latency	Ultra-low delay 50 milliseconds encoding
Encoding Bitrates	User selectable from 0.5 to 20 Megabits/s per channel (VBR / CBR stat mux)
Encoding Control	Video bitrate, CBR / VBR, ultra-fast encoding modes, 1080P MPEG2 mode
Features	All Closed Caption and TXT formats, Crystal-View technology

ASI INPUT / OUTPUT

ASI Inputs	(1) SPTS / MPTS
Remultiplex	Generate, inject, remap, restamp, grooming, add / drop; Stat Mux
Max Input Bitrate	214 Megabit/s
ASI Outputs	(2) Mirror
ASI Output Format	Selectable 188 / 204 bits
Transport Stream	ASI Mux MPTS ready for exciters, STLs, and uplinks
Max Output Bitrate	Fixed payload selectable to 19.3 Megabit/s (ATSC) or any other value as needed


** Due to continuous product improvements, Technalogix reserves the right to change specifications without notice. **

IPTV OUTPUT

IP Streaming Output	(1) 100 / 1000 auto
Mux IP Stream Output	(1) Same as ASI MPTS Mux but over IP – ready for IP STLs, excitors, etc.
SPTS Single Stream Output	(4) Selectable RTP / RTSP / UDP Single Program Transport Streams, IGMP, Multicast / Unicast
IPTV Bitrates	Same as ASI Mux output for the MUS stream, same as each encoder for the SPTS streams

INTERFACE

DB25 Remote Port	Control: RF carrier on/off, RF power up/down, reset Monitor: Forward/reflected RF level, control PCB Vcc Flags: Overdrive, VSWR (adjustable trip point), high temperature
Ethernet	Control: RF carrier on/off, RF power up/down, AGC/manual mode, change VSWR trip point, reset Monitor: Forward/reflected RF level, pallet voltage, RF input level, temperature, VSWR trip point, model/serial number Flags: Carrier on/off, overdrive, pallet voltage, VSWR, RF input, temperature, AGC / manual
SNMP	Control: RF carrier on/off, RF power up/down, AGC/manual mode, change VSWR trip point, reset Monitor: Forward/reflected RF level, DC pallet voltage, RF input level, temperature, pallet current, attenuation, run time, RF fault, model/serial number Flags: Overdrive, VSWR, temperature, SNMP error

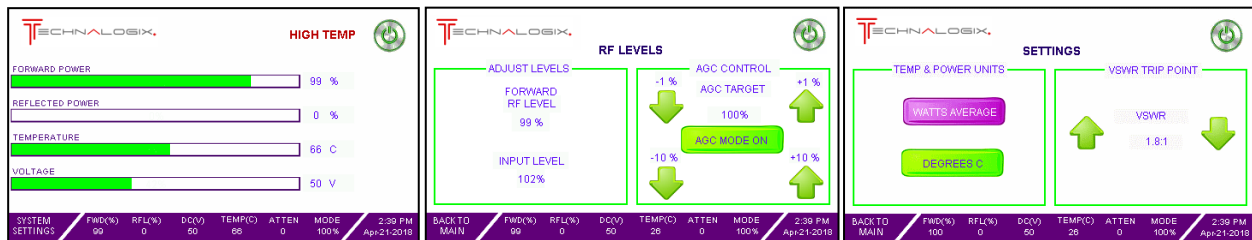

Screenshots of touchscreen interface

PHYSICAL FEATURES

Minimal Rack Space	TAUD-1000 Amplifier	6U x 30”D x 19”W
Encoder/Stat Mux/Modulator:		1U (H) x 15.35” (D) x 19” (W)
Lightweight Enclosures	Aluminum, typically 70 lbs	
Operating Temperature	0 to +45° C	
Humidity	90%, non-condensing	
Cooling	Air cooled	

ELECTRICAL CHARACTERISTICS

Flexible AC Input	TAUD-1000 Amplifier	180-264Vac, 29Aac at 208Vac single phase
	Other AC supply voltages and phases available on request. Verify AC voltage range at time of order.	



** Due to continuous product improvements, Technalogix reserves the right to change specifications without notice. **

All Specifications Taken With TP-1000 Modulator

TYPICAL SPECIFICATIONS

ATSC/VSB MEASURE: VSB PARAMETERS			
CENTER FREQ	CHANNEL	ATTEN : LOW+P	
539.00 MHz	25	-7.1 dBm	
TRANSMISSION:			CONSTELL. DIAGRAM...
PHASE JITTER (RMS)	---	°	
SIGNAL/NOISE (LOW Q)	43.4	dB	FREQUENCY DOMAIN...
SUMMARY:			TIME DOMAIN...
MER (REAL,RMS)	42.6	dB	VSB PARA PILOT VALUE.
MER (REAL,MIN)	13.4	dB	
MER (REAL,RMS)	0.74	%	
MER (REAL,MAX)	21.31	%	
			ADD. NOISE OFF

ATSC/VSB MEASURE			
CENTER FREQ	CHANNEL	ATTEN : LOW+P	
539.00 MHz	25	-7.1 dBm	
SET CENTER FREQ	539.0000000 MHz		CONSTELL. DIAGRAM...
SET PILOT FREQ	536.3094406 MHz		
CALC PILOT FREQ	536.3091006 MHz		FREQUENCY DOMAIN...
PILOT FREQ OFFSET	-340.0 Hz		
SYMBOL RATE OFFSET	-6.8 Hz		TIME DOMAIN...
MODULATION 8VSB			VSB PARAMETERS...
MER (REAL,RMS)	42.4	dB	
MER (REAL,RMS)	0.75	%	RESET BER
BER BEFORE RS	0.0E-10 (2K92/10K0)		
BER AFTER RS	0.0E-9 (2K40/10K0)		
SEG ERR RATIO	0.0E-7 (2K40/10K0)		
SEG ERR / s	00000		ADD. NOISE OFF
TS BIT RATE 19.393 Mbit/s			
SELFTEST ERROR CODE: 000001 (HEX)			

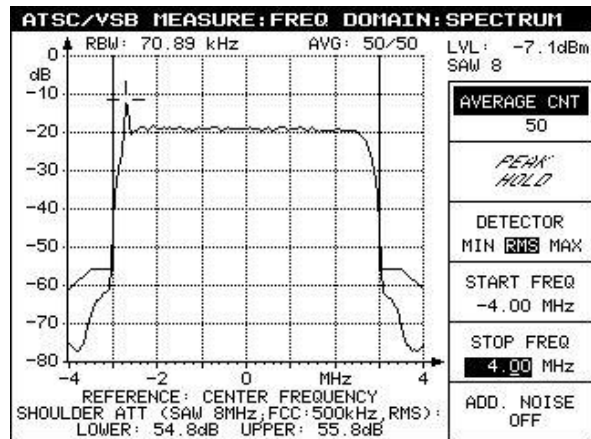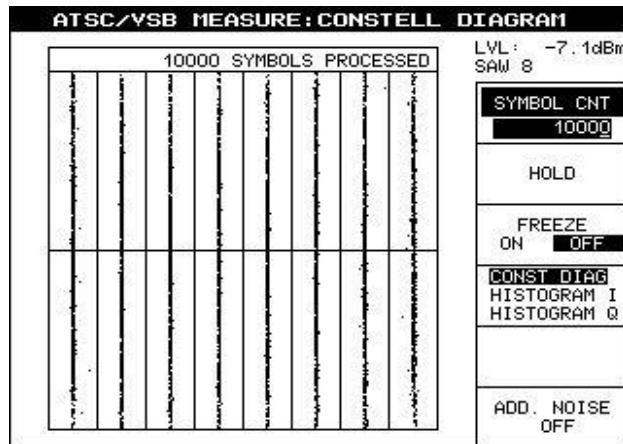

** Due to continuous product improvements, Technalogix reserves the right to change specifications without notice. **