

- Class leading standard feature set, including stereo encoder, RBDS/RDS generator, SCA, etc.
 - Built in compressor/limiter
 - Efficient OLED front panel monitoring
 - World class reliability and quality from North American design and manufacture
 - Frequency agile 87.5 - 108MHz
 - AES, S/PDIF, and analog audio inputs standard
 - Unmatched efficiency with state-of-the-art transistors and power supply
 - Extensive monitoring through Ethernet, SNMP, and parallel interface
- 2 Year Warranty

AUDIO CHARACTERISTICS

Mono Operation	<i>Input Impedance</i>	600Ω, 10 KΩ (selectable from front panel)
	<i>Input Connector</i>	XLR (balanced)
	<i>Input Level Max</i>	+10 dBm +/- 2dB (others available)
	<i>Harmonic Distortion</i>	<1% (50 Hz-15KHz)
	<i>S/N Ratio</i>	>-60dB FM noise, >-50dB AM noise
	<i>Pre-emphasis</i>	25, 50, 75 μS, or flat response (selectable)
MPX Operation	<i>Input Impedance</i>	10 KΩ unbalanced
	<i>Input Connector</i>	BNC
	<i>Harmonic Distortion</i>	< 1% (50 Hz-15KHz)
SCA Operation	<i>Number of Inputs</i>	2
	<i>Input Connector</i>	BNC female
	<i>Input Level</i>	+10 dBm nominal
	<i>Frequency Range</i>	57 to 93 kHz
Digital Audio	<i>AES/EBU</i>	XLR, 3-position, female
	<i>S/PDIF</i>	optical, Toslink
	<i>S/PDIF</i>	coaxial, RCA female

RF CHARACTERISTICS

Output Impedance	50 Ω
Modulation	FM, Deviation ± 75 KHz
Frequency Range	87.5 – 108.0 MHz (± 1 kHz stability)
Nominal Output Power	300W
Power Level	Adjustable 1 – 105%
Output Connector	Type-N female, (others upon request)
Spurious Emissions	Compliant to Industry Canada BETS-6 and FCC 73.317

ELECTRICAL

Flexible AC Input	100-240 Vac 50/60 Hz, single phase
--------------------------	------------------------------------


** Due to continuous product improvements, Technalogix reserves the right to change specifications without notice. **

INTERFACE

Remote Port	<p><i>Control:</i> RF carrier on/off, RF power up/down, reset</p> <p><i>Monitor:</i> Forward/reflected RF level, control PCB Vcc</p> <p><i>Flags:</i> Amplifier overdrive, VSWR (adjustable trip point), high temperature</p>
Ethernet	<p><i>Control:</i> RF carrier on/off, RF power up/down, AGC/manual, change VSWR trip point, reset</p> <p><i>Monitor:</i> Forward/reflected RF level, DC pallet voltage, RF input level, temperature, VSWR trip point, model, S/N</p> <p><i>Flags:</i> Carrier on/off, amplifier overdrive, DC pallet voltage, VSWR, RF input level, temperature, AGC/manual status</p>
SNMP	<p><i>Control:</i> RF carrier on/off, RF power up/down, AGC/manual, change VSWR trip point, reset</p> <p><i>Monitor:</i> Forward/reflected RF level, DC pallet voltage, RF input level, temperature, pallet current, attenuation, run time, RF fault, model/serial number</p> <p><i>Flags:</i> Amplifier overdrive, VSWR, temperature, SNMP error</p>
RBDS/RDS	<p><i>Input Connector:</i> USB</p> <p><i>Features:</i> Scrolling, parsing, advanced weekly scheduling, UECP, ASCII terminal control</p> <p><i>Supported Commands:</i> PI, PS, PTY, TP, AF, TA, PTYN, DI, EON, RT+, M/S, PIN, ECC, RT, TDC, IH, ODA, CT, LIC, TMC</p>

PHYSICAL FEATURES

Minimal Rack Space	2U case, 3-1/2"H x 25"D x 19"W
Lightweight Enclosures	22 lbs, Aluminum
Operating Temperature	0 to +45° C
Humidity	90%, non-condensing

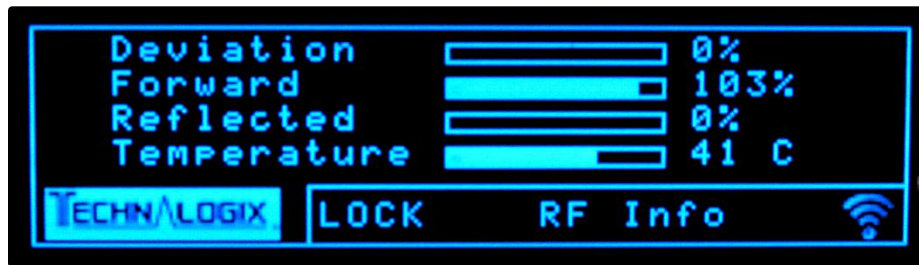

OLED Display Screen



** Due to continuous product improvements, Technalogix reserves the right to change specifications without notice. **