



## IMC-1000M

10/100/1000Base-T to 100/1000Base-SX/LX  
Managed Fiber Converter

## IMC-1000MS

10/100/1000Base-T to 100/1000Base-X SFP  
Managed Fiber Converter

IMC-1000M(S) models are managed Gigabit media converters that support conversion between electrical 10/100/1000Base-T and optical 100/1000Base-X Ethernet. Housed in rugged DIN rail or wall mountable enclosures, these converters are designed for harsh environments, such as industrial networking and intelligent transportation systems (ITS) and are also suitable for many military and utility market applications where environmental conditions exceed commercial product specifications. The converters are Web, SNMP or In-Band managed with an easy to use user interface for Operation, Administration, Maintenance & Provisioning, including bandwidth control, speed, VLAN, Diagnostic, storm filter or converter configurations. The network administrator can manage IMC-1000M(S) via standard SNMP manager such as SmartView. It also provide loop-back test and dying gasp, and can be monitored from a centrally located OAM-enabled FRM220-1000MS converter via remote in-band management.

### Features

- Conversion between 10/100/1000Base-T and 100/1000Base-X Fiber cable interface
- Supports Dual Rate (100/1000) SFP for selectable Fast or Gigabit speed on fiber
- Redundant dual DC input power 12/24/48VDC (9.6 ~ 60VDC)
- IP30 rugged metal housing and fanless
- Wide operating temperature -20~75°C (IMC-1000M(S)-E)
- UL60950-1, CE, FCC, RailWay traffic EN50121-4 certification
- Industrial grade EMS, EMI EN61000-6-2, EN61000-6-4 certification
- MIB counters
- Supports LFPT (Link Fault Pass Through)
- Auto Laser Shutdown (ALS)
- Supports SmartView for centralized management (Figure 1)
- Web management (Figure 3)
- SNMP management (Figure 1)
- Supports 16 IEEE 802.1Q Tag VLAN Group
- SNMP alarm trap for power loss and port link down
- Supports in-band management from FRM220 Chassis With FRM220-1000MS (Figure 2)
- Remote loop-back test
- Dying gasp (remote power failure detection)

### Specifications

<b>Standard</b>	IEEE802.3 10Base-T 10Mbit/s Ethernet IEEE802.3u 100Base-TX, 100Base-FX, Fast Ethernet IEEE802.3ab 1000Base-TX Gbit/s Ethernet over twisted pair IEEE802.3z 1000Base-X Gbit/s Ethernet over Fiber-optic IEEE802.3x Flow Control and Back pressure IEEE802.3ah OAM management	<b>LED</b>	RJ-45 port: Speed: 10 (OFF), 100 (Green), 1000 (Yellow) LNK/ACT for RJ45(Green): ON : Connected to network/ OFF: Not connected to network/ BLK: Networking is active
<b>Fiber Ports</b>	100Base-X or 1000Base-X set by Web Supports Auto Laser Shutdown (ALS)	<b>Reverse Polarity Protection</b>	Present for power Input
<b>RJ45 Ports</b>	10/100/1000Base-T	<b>Overload Current Protection</b>	Present
<b>CPU watch dog</b>	Present	<b>Power Supply</b>	12/24/48VDC (9.6~60VDC) , Redundant power with polarity reverse protect function and removable terminal block Provide DC Power JACK adapter cable for external power adapter
<b>Push Button</b>	Reset, Load default setting	<b>Alarm Relay Contact</b>	Relay outputs with current carrying capacity of 1 A @24VDC Relay alarm output for power fail or port link down
<b>Jumbo Frame</b>	9K bytes	<b>Removable Terminal Block</b>	Provide 2 redundant power, alarm relay contact, 7 Pin
<b>Fiber Parameters</b>	Fiber Cable (Multi-mode): 50/125um,62.5/125um Fiber Cable (Single-mode): 9/125um Wavelength: 1310nm (Multi-mode/Single-mode) Available distance: 500M (Multi-mode SX) 20KM (Single-mode) 40KM (Single-mode) (IMC-1000M, IMC-1000M-E) SFP, Distance depend on plug-in Fiber Transceiver (IMC-1000MS, IMC-1000MS-E)	<b>Power Consumption</b>	4.8 W
<b>Link Fault Pass Through (LFPT)</b>	TX-Fiber: If TX port link down, the media converter will force Fiber port to link down Fiber-TX: If Fiber port link down, the media converter will force TX port to link down	<b>Operating Humidity</b>	5% ~ 95% (Non-condensing)
<b>Connector</b>	Fiber: SC (Multi-mode, 500M), SC (Single-mode, 20KM, 40KM) (IMC-1000M, IMC-1000M-E) SFP Slot (IMC-1000MS, IMC-1000MS-E) RJ-45: CAT 5e (10/100/1000Mbps) Twisted Pair cable Auto MDI/MDI-X and Auto-Negotiation Function Supports	<b>Operating Temperatur</b>	-10° ~ 60°C (IMC-1000M, IMC-1000MS) -20 ~ 75°C (IMC-1000M-E, IMC-1000MS-E)
<b>LED</b>	Per Unit : Power 1 (Green), Power 2 (Green), Fault (Amber) Fiber LNK/ACT (Green): ON: Connected to network OFF: Not connected to network BLK: Receive /Transmit Data Fiber speed : Yellow : 1000Base-X Green : 100Base-X	<b>Storage Temperature</b>	-40 ~ 85°C
		<b>Housing</b>	Rugged Metal, IP30 Protection and fanless
		<b>Dimensions</b>	106 x 38.6 x 142.1mm (D x W x H)
		<b>Weight</b>	0.63kg (IMC-1000M, IMC-1000M-E) 0.62kg (IMC-1000MS, IMC-1000MS-E)
		<b>Installation</b>	DIN Rail mounting or wall mounting
		<b>MTBF</b>	544,905 hrs (IMC-1000MS, IMC-1000MS-E) (MIL-HDBK-217) 559,059 hrs (IMC-1000MS, IMC-1000MS-E) (MIL-HDBK-217)
		<b>Warranty</b>	5 years

Certification	
EMI	CE
EMI (Electromagnetic Interference)	FCC Part 15 Subpart B Class A, CE EN55022 Class A
Railway Traffic	EN50121-4
Immunity for Heavy Industrial Environment	EN61000-6-2
Emission for Heavy Industrial Environment	EN61000-6-4

EMS	EN61000-4-2 (ESD) Level 3, Criteria B
	EN61000-4-3 (RS) Level 3, Criteria A
	EN61000-4-4 (Burst) Level 3, Criteria A
	EN61000-4-5 (Surge) Level 3, Criteria B
	EN61000-4-6 (CS) Level 3, Criteria A
	EN61000-4-8 (PFMF, Magnetic Field) Field Strength: 300A/m, Criteria A
Safety	UL60950-1
Shock	IEC 60068-2-27
Freefall	IEC 60068-2-32
Vibration	IEC 60068-2-6

## Software Specifications

### SNMP or Web management Mode (Figure 1, 3)

<b>Management</b>	Ingress/Egress bandwidth control with 64K granularity Web management, Firmware upgrade via Web Supports SNMP, MIB for management Supports DHCP client for automatic IP configuration Supports 802.1Q tag VLAN, 16 Tag VLAN group, MIB counters display
<b>Configuration</b>	IP configuration, password setting, converter configuration, port configuration, MIB counter, SNMP configuration, VLAN group configuration, alarm configuration
<b>Diagnostic &amp; Monitor</b>	Supports Link Fault Pass-Through (LFPT) Function Broadcast/Multicast/Unicast storm filter SNMP alarm trap for power loss and port link Up/Down

### In-Band Remote mode (Figure 2)

<b>Management</b>	Supports in-band management from FRM220 Chassis With FRM220-1000MS card Ingress/Egress bandwidth control with 64K granularity
<b>Configuration</b>	IP configuration, converter configuration, port configuration, MIB counter, VLAN group configuration, alarm configuration
<b>Diagnostic &amp; Monitor</b>	Remote loop-back test Dying gasp (remote power failure detection) Supports Link Fault Pass-Through (LFPT) Function Broadcast/Multicast/Unicast storm filter

## Application

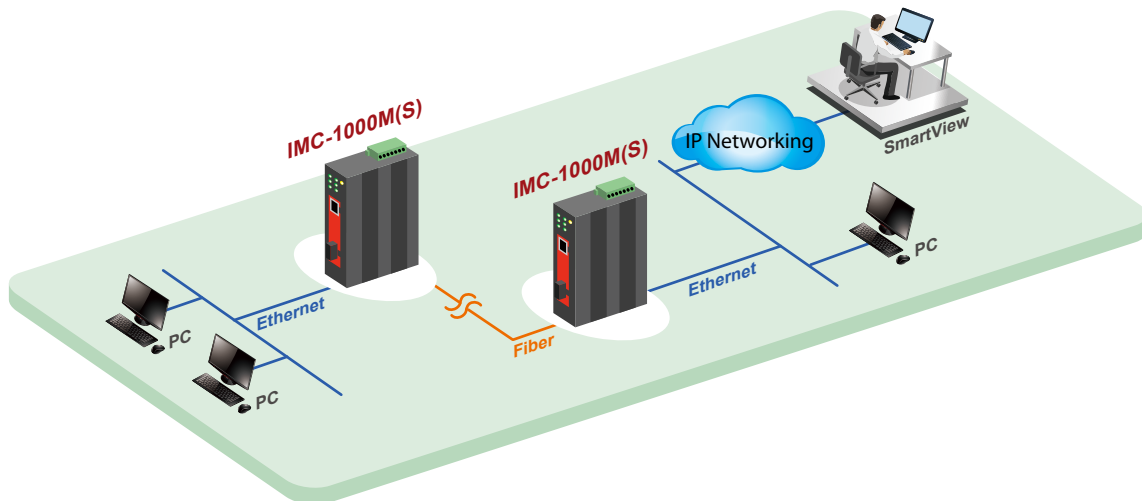


Figure 1 : IMC-1000M(S) Management by SNMP, SmartView

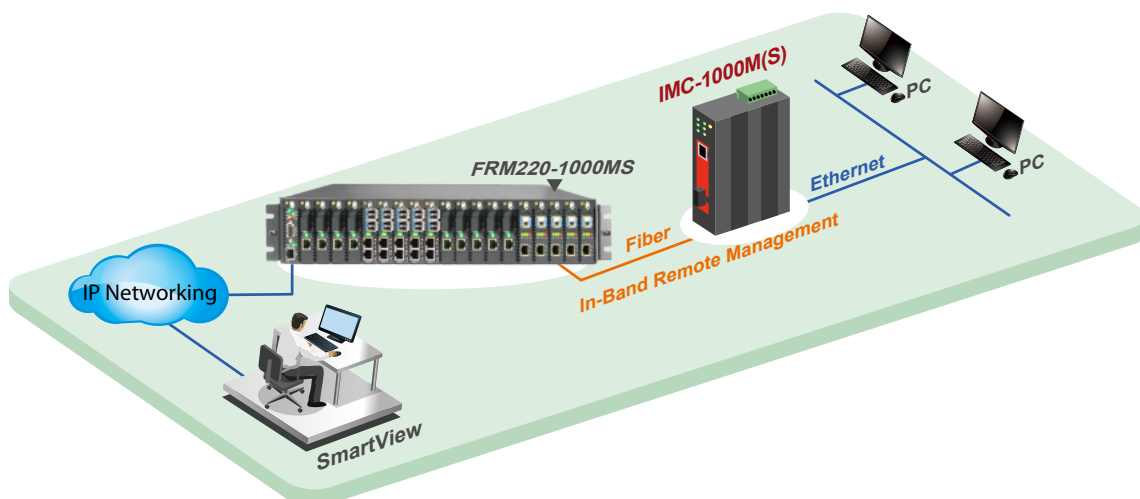


Figure 2 : IMC-1000M(S) Application in Remote, in-Band Management

[www.ipc2u.de](http://www.ipc2u.de) [www.ipc2u.com](http://www.ipc2u.com) Date 09/2015 Rev.01


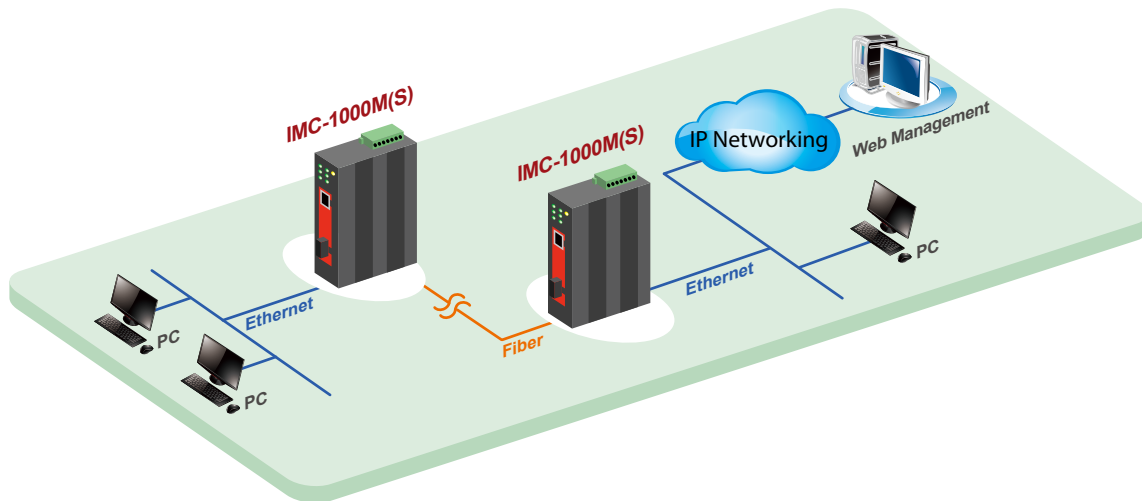


Figure 3 : IMC-1000M(S) Application in Web Management


## Dimensions

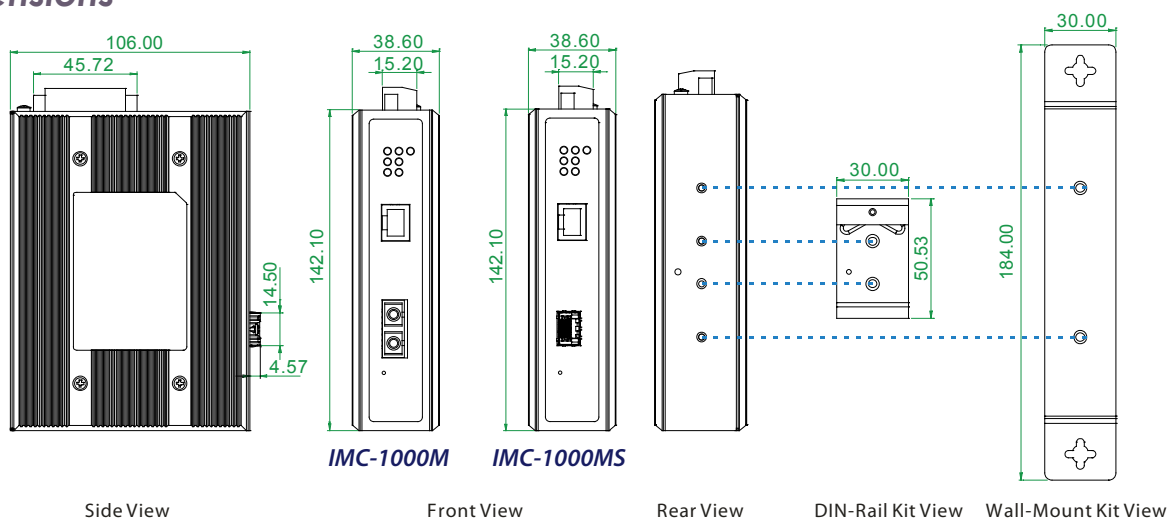

## Ordering Information

Model Name	Managed	Connectivity		Safety UL60950-1	Certification			CE	FCC	Operating Temperature
		UTP 10/100/1000 Base-T	Fiber Dual Speed 100/1000Base-X		Railway EN50121-4	EN61000-6-2 EN61000-6-4				
IMC-1000M	V	1	1 SC	V	V	V	V	V	V	-10~60 C
IMC-1000M-E	V	1	1 SC	V	V	V	V	V	V	-20~75 C
IMC-1000MS	V	1	1 SFP	V	V	V	V	V	V	-10~60 C
IMC-1000MS-E	V	1	1 SFP	V	V	V	V	V	V	-20~75 C

### Model Naming Rule

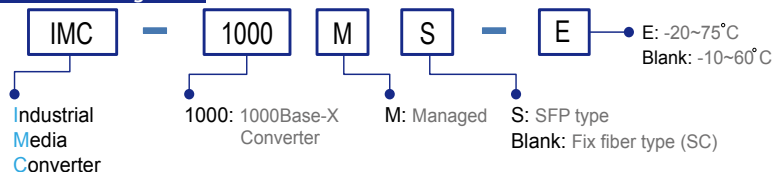


Connector Type	Connectivity Distance
SC	001:500M (M/M) 002 : 2km (M/M) 020:20km (S/M) 040:40km (S/M)
(IMC-1000M, IMC-1000M-E only)	020A: WDM 20km A type (TX:1310nm) 020B: WDM 20km B type (TX: 1550nm)

### Accessories

DR-4524	Industrial Power, Input 85 ~ 264VAC, Output 24VDC, 48W, -10 ~ +50°C
MDR-40-24	Industrial Power, Input 85 ~ 264VAC, Output 24VDC, 40W, -20 ~ +70°C
SFP Transceiver	Compatible, Reliable, 5-year Warranty

### SFP Naming Rule

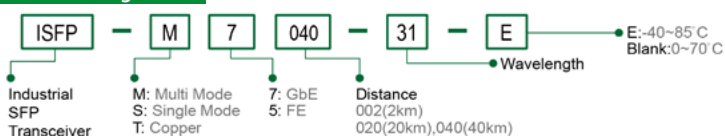

Example: IMC - 1000M - E - SC002