


Z-LINE[®] 1000 SERIES


SPECIFICATIONS:

The Glasfloss Z-Line 1000 air filter shall be of the extended surface pleated type. The media utilized shall be a micro fiberglass blend. The media shall be pleated in a tapered radial configuration. An expanded metal reinforcement shall be applied to the air leaving and air entry side of the media to maintain continuity of the radial pleats. The expanded metal shall be galvanized to resist rust and corrosion. A heavy-duty aluminized steel shall be utilized as an encasing frame. No glue shall be used in this product. Maximum operating temperature up to 300 Fahrenheit. All Glasfloss Z-Line 1000 Series filters shall be Classified under U.L. Std. 900.

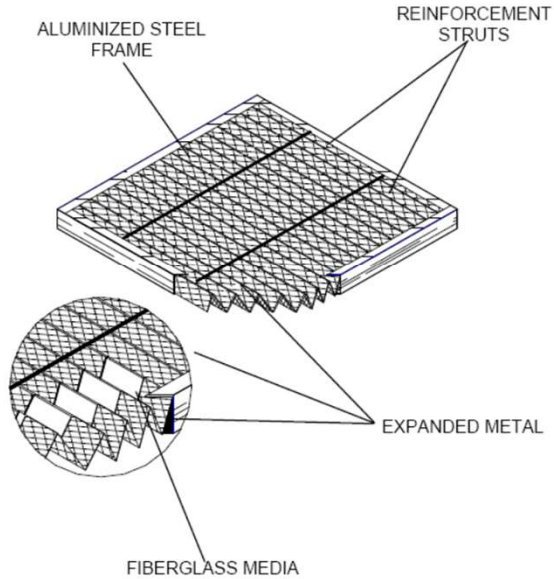

PARTICLE SIZE EFFICIENCY

Test filter size 24x24x2

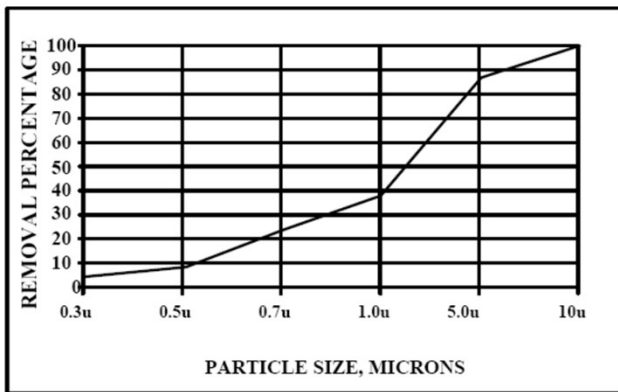

STANDARD PRESSURE DROP

Test filter size 24x24x2

