

FRONT KIDS SEAT ADAPTER ASSEMBLY GUIDE

Kids Seat Adapters are designed to attach the Yepp Maxi EasyFit to the Xtracycle FlightDeck and V-Racks. These adapters come in two versions - one for the forward seat position and one for the rear seat position. The front adapter is the wider of the two, and the front adapter is always installed flat on top of the deck with the wide end towards the middle of the deck.

<p>Adapter Kit Includes</p> <ul style="list-style-type: none">• Adapter• 2 M6x1x45mm bolts• 2 M5x.8x25mm bolts• 2 M6x1 nyloc nuts• 6 washers	<p>Tools required:</p> <ul style="list-style-type: none">• 3mm, 4mm allen wrenches• 10mm wrench• Sharp knife or rotary cutting tool (e.g. Dremel)• Sandpaper or strong tape (e.g. duct tape, Gorilla tape, electrical tape).
---	--

Preparation:

If your FlightDeck has already been installed, remove the bolts attaching it to the V-Racks and set them aside.

Note: If no Hooptie is installed on the bike, make sure to keep the 4 thick washers that sit between the deck and the blocks that are welded to the V-Racks. If there is a Hooptie installed on the bike, leave it in place.



Remove the FlightDeck from the bike and flip it so that the front cutout window is visible.


- Using a sharp knife or a rotary tool, cut along the rectangular path to remove the blanking plate from the port.

Note: Use caution and appropriate personal protection equipment for the tools and material.




The edges may be rough. Smooth them with sandpaper, or cover the cut edges with tape.

Place the FlightDeck back on the V-Racks so that the mounting holes line up the corresponding mounts on the V-Rack.

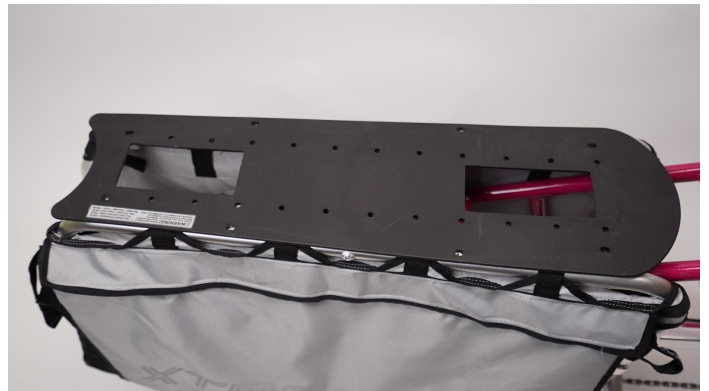

Place the front adapter (flat side down) over the two forward sets of holes, so that the window in the adapter aligns with the window in the deck.

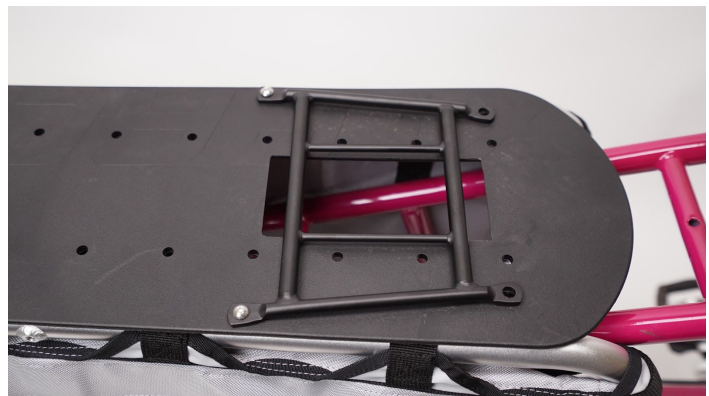

Insert the two skinnier, shorter bolts (M5x25mm) and washers from the kit through the rear set of holes on the adapter and FlightDeck, and screw them into the corresponding bosses on the V-Racks.


The two larger, longer, bolts (M6x45mm) and washers are used in the foremost two holes, and should pass through the blocks welded to the V-Racks, and Hooptie brackets if installed. They are then secured with a nut.

Note: The assembly order depends on whether or not there is a Hooptie installed.

Note: If needed, use a mallet to coax the bolts through the rack blocks, but be careful not to damage the threads.




HOOPTIE

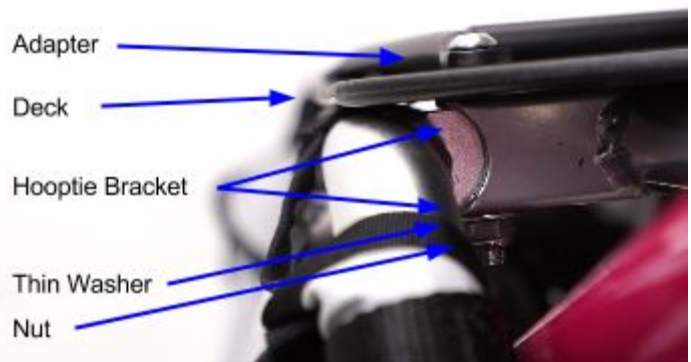

Secure the Adapter

- Use a 4mm allen wrench and 10mm wrench to tighten the two forward bolts to 4 N-m.
- Use a 3mm allen wrench to tighten the two rear bolts to 4 N-m.

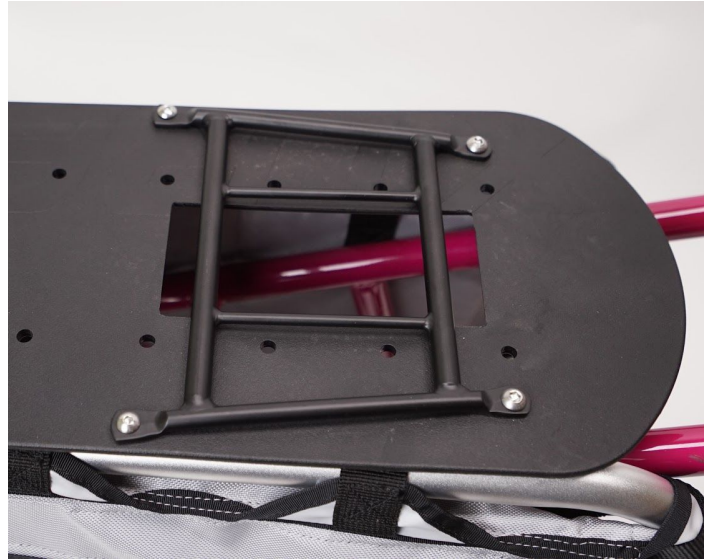

Finish installing the FlightDeck, by replacing the bolts in the two rear sets of holes, as per the FlightDeck LT2 installation instructions.

Note: If no Hooptie is installed, be careful to replace the thick washers that sit between the rack blocks and deck.

Note: You may wish to keep the four bolts that were replaced by the Adapter bolts, so that they can be used in case the kid seat adapter is removed.



Your rear Kid Seat Adapter is now ready for use with a Yepp Maxi EasyFit.

- Remove CarryAll lids.
- Follow manufacturer instructions to install and secure Yepp Maxi EasyFit

You're ready to ride!

Needs photo of yepp seat installed on bike in front position...use product photos from website?

WARNING: Before you ride, check tightness of all hardware - push and pull on all elements of Kids Seat Adapter and Yepp Maxi EasyFit to identify any loose hardware.

WARNING: Make sure the Yepp Maxi EasyFit is fully engaged with the adapter.

WARRANTY

Xtracycle Kids Seat Adapters are guaranteed to be free from manufacturing defects for one (1) year from the original date of purchase. This warranty applies only to the original buyer and is not transferable. This warranty does not cover damage from use of this product outside of its intended range or that resulting from modification or neglect. It also does not cover wear and tear resulting from the normal use of the product. Please contact your Xtracycle dealer if you believe you have a warranty claim.