

Warranty

Xtracycle SlingSets are guaranteed to be free from manufacturing defects for one (1) year from the original date of purchase.

Defective products will be repaired or replaced at Xtracycle's discretion. To determine if a warranty claim is valid you may be required to return the product to Xtracycle for inspection. Xtracycle is not responsible for removal, installation or shipping costs. This warranty applies only to the original buyer and is not transferable.

This warranty does not cover damage from use of this product outside of its intended range or that resulting from modification or neglect. It also does not cover wear and tear resulting from the normal use of the product.

Double your warranty to two years!
Register your Xtracycle SlingSet within 14 days
of purchase to extend your warranty to two years.

<http://www.xtracycle.com/register>

Notices:

Warning: Always use wheel protection like WheelSkirts or Xtracycle bags when riding with passengers or cargo.

Warning: You must place the SlingSet over a WheelSkirt or CargoBay so that cargo does not go into the rear wheel.

Note: Max Capacity: 50 lbs (22.7 kg)

Our mission:

To empower people with
transformational tools that
move the body and spirit.
www.xtracycle.com

SlingSet
SKU: 3BG4000



REV1B

XTRACYCLE

SlingSet™ Manual

Because Sometimes You Want to
Also Carry the Kitchen Sink



What's Included:

- 1 Pair of Slings
- 3 Male side-release buckles with hook-and-loop straps
- 3 Female side-release buckles with hook-and-loop straps

Compatibility: The SlingSet is designed to work on all Xtracycle models from 2000 to 2018 and beyond. This manual will specifically walk you through the installation for the LEAP and the EdgeRunner Swoop.


www.xtracycle.com

STEP 1: Prep



Place one Sling facedown. Xtracycle logo should be facing the floor and away from you with the Sling mounting side-release buckles A & B closest to the bike.

STEP 2: Clip to Frame

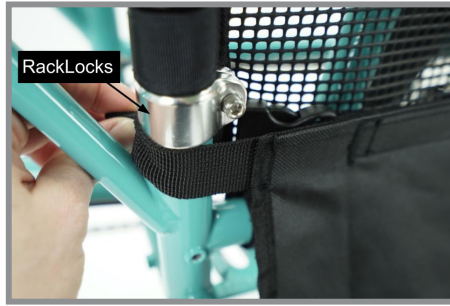

Attach side-release buckles A and B around the vertical uprights on the frame, below the RackLocks.

STEP 4: Attach strapping buckles




Attach side-release buckles C, D, and E to the top of the vertical rack using the hook-and-loop straps provided. Then clip the buckles on the sling (with long straps) to the mated buckle that is looped to the rack.




Note: The c-clip on the back of the nylon webbing keeps the excess tail from getting in your gears or spokes while riding. If the strap ends are flapping around, make sure to reattach the c-clip "slacker".

STEP 3: Tension Sling

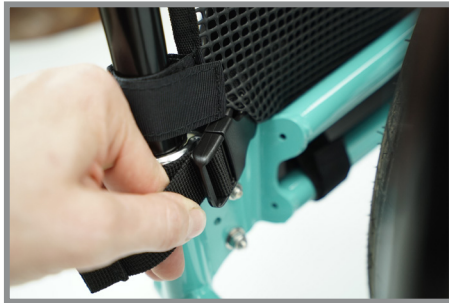

Pull tight on both ends until the bottom band of the Sling is highly tensioned from front to back. Let the Sling fall to the floor.

STEP 5: Install Other Sling

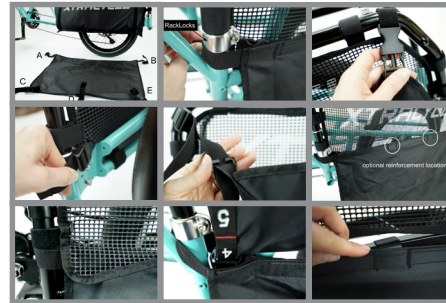


Repeat steps 1-4 on the opposite side of the bike.

STEP 6: Buckle Over Top



Now you are ready to clip buckles over the top of the deck for hauling bigger or bulky loads.

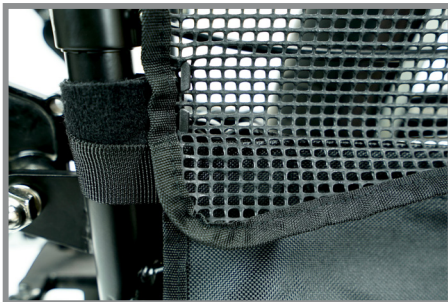

Note: When installing a Sling on the LEAP with a WheelSkirt, overlap the front of the Sling with the WheelSkirt. Photo shown installed with uncut (29+) V-Racks.



Note: If using a Sling over a CargoBay on an EdgeRunner or LEAP, buckle the Sling to the frame upright, outside the vertical webbing that connects the CargoBay to the "chainstay" of the EdgeRunner or LEAP.

