



1400 and 1500



1700



Bath has integrated overflow – slot design

Back-to-wall freestanding bath - 3 sizes Integrated slot overflow

Features

- Sits flat against the wall
- Seamless design
- White sanitary grade acrylic, high gloss finish
- Excellent heat retention properties
- Adjustable support feet
- Suits 40mm waste (not supplied)

Available in 3 sizes

- 1400 mm long
- 1500 mm long
- 1700 mm long

Installation

The bath is supplied with four adjustable support feet on the base frame of the bath. Position the bath and use the adjustable feet to level the bath. Leave a 3mm void between the base of the bath and the floor. Use silicone around the base to seal the bath to the floor. Allow a 20mm gap in the silicone seal as a weephole (gap is designed to reveal any plumbing leakage).

Use acetic cured silicone sealant. Do not use epoxy type adhesives.

Order codes

Bath only - Integrated Overflow

WHITE GLOSS FINISH

Plati 135, 1400 mm, White Gloss 192789 192717 Plati 135, 1500 mm, White Gloss 192718 Plati 135, 1700 mm, White Gloss


Bath Installation Kit + Pop-out Waste to suit Integrated Overflow

OPTIONAL EXTRA — ORDER SEPARATELY

FlexiWaste Installation Kit with premium Pop-out Bath Waste, with colour options, is available as an optional extra.

Please note: The Pop-out Waste in this kit is suitable for both non-overflow and integrated overflow requirements when used with this kit.

192179	FlexiWaste Bath Installn Kit w Pop-out Waste, IO+NOF, Chrome
192329	FlexiWaste Bath Installn Kit w Pop-out Waste, IO+NOF, Brushed Nickel
192332	FlexiWaste Bath Installn Kit w Pop-out Waste, IO+NOF, Gunmetal
192333	FlexiWaste Bath Installn Kit w Pop-out Waste, IO+NOF, Brushed Gold
192331	FlexiWaste Bath Installn Kit w Pop-out Waste, IO+NOF, White Gloss
192458	FlexiWaste Bath Installn Kit w Pop-out Waste, IO+NOF, White Matte
192330	FlexiWaste Bath Installn Kit w Pop-out Waste, IO+NOF, Black Matte

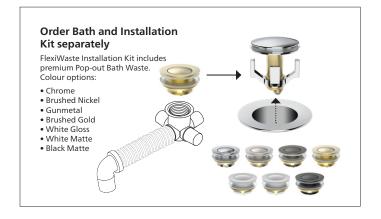



Please note

- All measurements are in millimetres.
- Dimensions are nominal and subject to normal manufacturing variations.
- Fixing: Use silicone sealant. Do not use epoxy type adhesives.
- Specifications may vary without notice as part of our continuous improvement practices.
- Clean with a damp cloth. Do not use abrasive cleaners, liquids or pastes.