

## RANGEHOODS

# >> SILENT CEILING CASSETTE RANGEHOOD

with automatic power-off // CC-PARA4S, CC-PARA4W

**schweigen**



Available in White or Stainless Steel



### Modular

With the flexibility of this design, you can create your configurations of 2, 3 or 4 units - whatever best suits your home and kitchen environment\*.



### Stainless Steel or White Finish

Suitable for all kitchens in either stainless steel or white. It's both contemporary and durable.



### Perimeter Aspiration

Uses an additional panel to create a venturi effect, which helps capture smoke, steam, grease and oil more effectively.



### Dishwasher Safe Aluminium Filters

Durable materials that (when regularly maintained) can be run through your dishwasher.



### Silent Motor System, up to 3200m<sup>3</sup>/hr

Enjoy cooking in peace without motor noise from your appliance.



### Automatic Power-off

Select this function and the hood will switch off automatically after 15 minutes.



### LED Lighting

Innovative wide-angle LED lighting system increases the aesthetic value of the appliance.



### 4 Extraction Speeds with Remote Control

From mild Western style cooking to traditional Eastern cuisine, select the speed that best suits your needs.



**GOOD  
DESIGN  
AWARD®  
WINNER**



[www.schweigen.com.au](http://www.schweigen.com.au)

## RANGEHOODS

### >> SILENT CEILING CASSETTE RANGEHOOD

with automatic power-off // **CC-PARA4S, CC-PARA4W**

#### PRODUCT DETAILS

- stainless steel or white
- Perimeter Aspiration
- easy-remove, dishwasher safe aluminium filters
- silent Isodrive® motor
- powerful, silent operation
- automatic power-off
- LED illumination
- 4 extraction fan speeds with remote control
- 5 Year Warranty
- individual module dimensions: (W x D)  
360 x 360 mm
- 1 x control module,  
+ 3 x subordinates
- 4 x aluminium filters
- 10 amp power  
connection required

#### MODEL OPTIONS


**CC-PARA4S, 4 modules (stainless steel)**

**CC-PARA4W, 4 modules (white)**

\*May require a bulkhead for installation

#### ISODRIVE POWER OPTIONS

- **SP** - single external motor,  
- 1600m<sup>3</sup>/h airflow,  
- 200mm SteelFlex™ ducting (6m),  
- install roof/wall
- **SP2** - twin external motor  
- 3000 m<sup>3</sup>/h airflow  
- 200mm SteelFlex™ ducting (2 x 6m)  
- install roof/wall
- **SE** - single external motor  
- 3200 m<sup>3</sup>/h airflow  
- 250mm SteelFlex™ ducting (4m)  
- 200mm SteelFlex™ ducting (2m)  
- SE accessory kit required  
- install roof/wall
- 10 Year Warranty

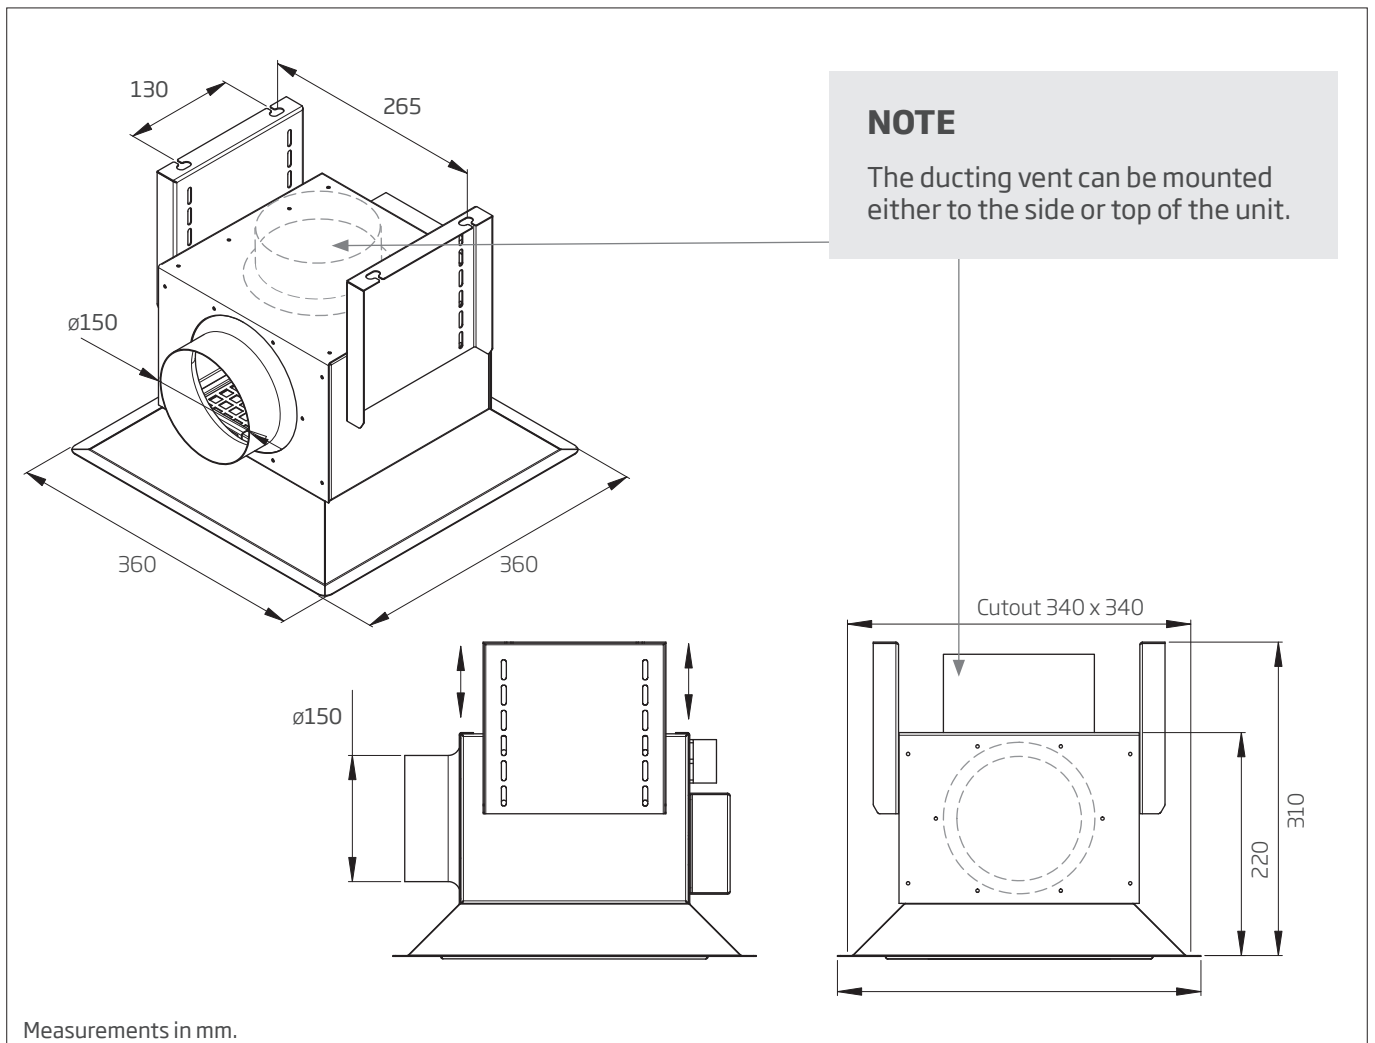

\* Note: Please confirm the module configuration and motor power with your representative before ordering.