

# DWAI6314X2

Product Family Commercial width Commercial height Installation Kitchen panel N° baskets Motor EAN code

Dishwashers 60 cm 82 cm Partially-integrated built-in Not supplied 3, Flexi Single phase 8017709278717



## **Programs / Functions**

€CO 50° Eco* ♀⊕ 🕅	ECO 50°		
N. of programmes	5+5 quick programmes	ECO Quick	Yes
Washing temperatures	45, 50, 65, 70 °C	Delicate and Quick	Yes
Soak	Yes	Daily Quick	Yes
Rapid 27'	Yes	Strong and fast	Yes
ECO	Yes	Intensive 65°	Yes
Ultraclean	Yes	Normal ECO	Yes

### Options



Delay timer option 1/2 load FlexiZone option 3-6-9-12 hours Yes Options for tabs Yes FlexiTabs Quick Time option Yes

### Baskets

٢			
Basket colour	Grey	Lower Basket	With 4 foldable racks
Basket components colour	Grey	Lower basket with anti- drip inserts	Yes
Handle	In plastic with stainless steel insert on upper and lower basket	Largest loadable dish in lower basket	30,0 cm
Upper Basket	With central fixed racks	Colour Inner Components	Blue



Height adjustment of<br/>the upper basketOn three levelsLargest loadable dish in<br/>upper basket19,0 cm

Cutlery basket

13 place settings sliding

### **Technical Features**

ORBITAL SYSTEM			
Width (mm)	598 mm	Drying system	Natural condenser drying
Depth (mm)	570 mm	Steam protection	In plastic
Product Height (mm)	818 mm	Child safety system	Yes
Controls	Electronic	(door lock)	
Programme graphics	Symbols	Tub material	Stainless steel
On/off indicator	Yes	Filter	Stainless steel
Rinse aid indicator	Light	Concealed heating	Yes
Progress indicator	Yes	element	
End of cycle indicator	Led on display, with acoustic signal	Hinges	Self balancing with fixed hinges
Washing system	Orbital	Min. and max plinth height	100 - 215 mm
Third spray arm	Single	Adjustable feet	7cm, from 820 to 890 mm
Flood protection system Water supply	Total Acquastop Single; cold/hot water max.	Additional gaskets	Yes, with stainless steel plate
	60°C - energysave with hot	Back cover	Yes
Max water hardness	water up to 35% 100°fH;58°dH	Depth of dishwasher with open door (mm)	1146
		Top cover	In plastic

### **Electrical Connection**

Plug	(I) Australia	Frequency (Hz)	50 Hz
Connected power	1800 W	Type of connection	Single-phase
Current	10 A	Power supply cable	140 cm
Voltage	220-240 V	length	





# Not included accessories

### KITPL60FABB

Toekick Kit in White colour with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.

### KITPL60FABN



Toekick Kit in Black colour with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.

### KITGH



Kit glass holder. It has to be fitted on the first basket but only if there are foldable racks

#### KITPL60FABX


Toekick Kit in Stainless Steel with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.

#### KITPLV2

Kit extension for dishwasher and washing machine: lenght mt. 2



# Symbols glossary (TT)

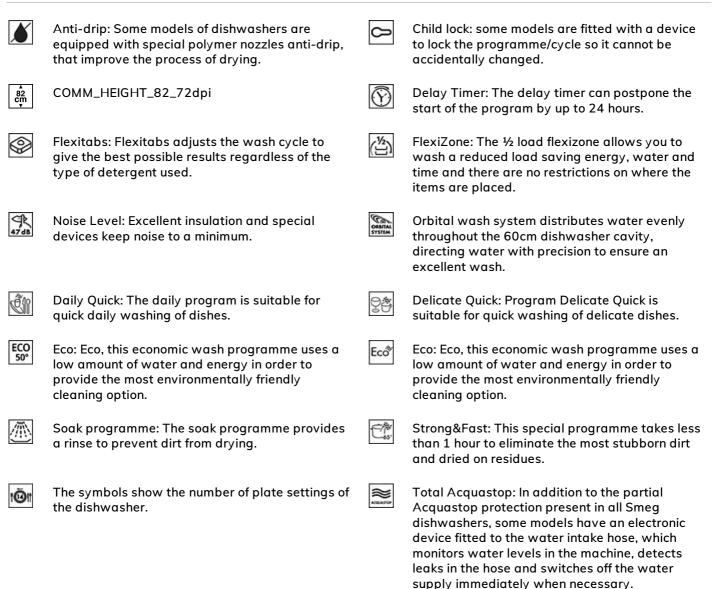



System WaterSave ensures the best washing results with minimal water consumption depending on the model of dishwasher.