

# PRODUCT DESCRIPTION


## optibelt **KB** KRAFTBANDS



### Product design

The optibelt KB kraftbands are used in the most varied constructions according to the technical requirements and applications.

### Wrapped kraftbands

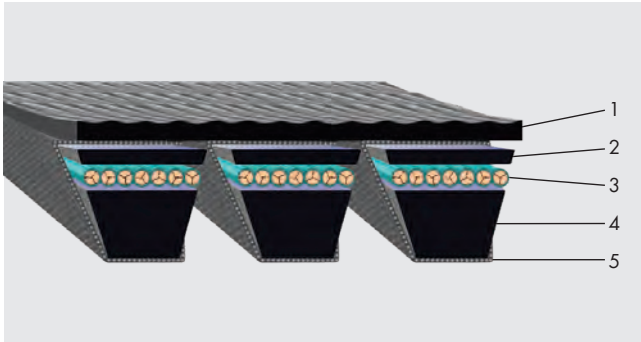

- 1 Top surface
- 2 Top layer
- 3 Polyester tension cord
- 4 Core
- 5 Cover fabric

### Profiles

3V/9J; 5V/15J; 8V/25J;  
SPZ; SPA; SPB; SPC;  
A/HA; B/HB; C/HC; D/HD


### Dimensions

1200 mm to 12.000 mm  
standard range

### Application areas

Optibelt wrapped KB kraftbands are primarily used in mechanical engineering and agricultural machines.

### optibelt **RED POWER 3** high performance kraftbands – wrapped

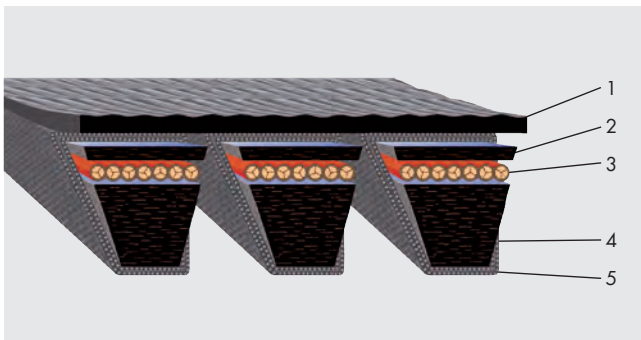

- 1 Top surface
- 2 Chloroprene compound with transverse oriented fiber
- 3 Polyester tension cord. maintenance-free
- 4 Chloroprene compound with transverse oriented fiber
- 5 Abrasion-resistant cover fabric

### Profiles

3V/9J; 5V/15J; 8V/25J;  
SPB; SPC

### Dimensions

1270 mm to 12.000 mm  
standard range

### Application areas

This compact drive element is primarily used for special problem solutions in mechanical engineering and commercial vehicle construction.

We recommend the use of optibelt KB RED POWER 3 for maintenance-free drives and for the use with back bend tension idlers.