



TIMING BELTS

ZR

Performance ZR timing belts feature an engineered synthetic rubber neoprene core, glass fiber cords and have an abrasion-resistant protective fabric cover. This combination makes these timing belts extremely durable and efficient.




SECTION / PITCH LENGTHS

- MXL / 2.64-40.4 in.
- XL / 6-63 in.
- L / 10.9-81.7 in.
- H / 23-170 in.
- XH / 50.7-175 in.
- XXH / 70-180 in.



DOUBLE SIDED
AVAILABLE

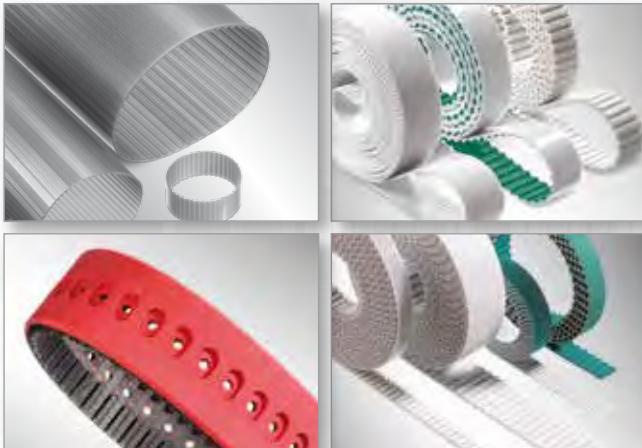

also available:

ALPHA TIMING BELTS

OPTIBELT's complete line of polyurethane timing belts: Contact a representative for more information.

ALPHA TORQUE and POWER: Polyurethane power transmission

ALPHA FLEX and LINEAR: Standard and custom order power transmission

ALPHA SPECIALIZED: Custom products to meet your facility's specifications and needs.

ADDITIONAL RESOURCES

Visit www.optibelt.com for additional information:

- Technical Product Manuals
- Drive Calculation Software
- Locate your nearest dealer
- and more...

NEED HELP?

If you have questions, need additional product information or sales, service or engineering assistance simply send an e-mail to info@optibelt-usa.com or call us at **800-292-6081**