


STRIKE B2 7dBi ANTENNA

The antenna's high gain and reliable performance over **700/850/900/1800/1900/2100/2600MHz** frequencies makes it ideal for rural areas. This antenna has a removable whip and comes fitted with an FME connector and a bull bar mounting bracket which makes the installation quick and easy. The removable whip allows for seamless removal and re-attachment as the user desires.





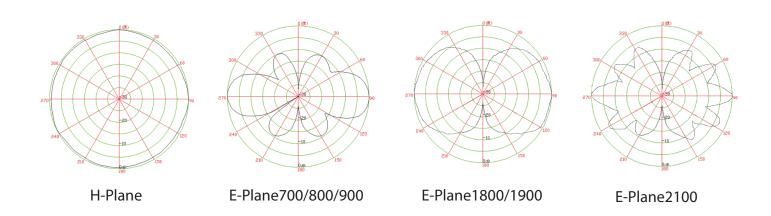

ELECTRICAL SPECIFICATIONS								
Model	B2							
Frequency Range (MHz)	700-800	850	824-896	890-960	1710-1880	1850-1990	1920-2170	2600
dBi	6.5	7	6.5	6.5	4	3.5	3.5	3.5
VSWR	1.45	1.35	1.1-1.5	1.1-1.85	1.30-1.35	1.32-1.5	1.5-2.5	2.5
Tuned Bandwidth	Full							
Impedance	50 ς							
Horizontal Beam Width	360°							
Vertical Beam Width	25°	25°	25°	25°	58°	58°	58°	58°
Polarization	Vertical							
Gain	7.0 dBi							
Input Power	10 W							
Grounding Protection	Direct Ground							
Connector	FME-female							
MECHANICAL SPECIFICATIONS								
Length mm	730							
Radome Diameter mm	20							
Weight kg	1.3							
Hold Pole Diameter	Ø25~Ø55mm							
Mounting Area	15mm diameter mount hole required							