


TECHNICAL SPECIFICATIONS		
VOLTS	120 V	
AMPS	12.5 A	
WATTS	1465 watts	
HEATER HIGH	1465 watts	
LOW	750 watts	
NO HEATER	21 watts Max.	
LAMPS TYPE	LED	
TOTAL WATTS	19 watts	
ROTOR MOTOR	1 at 2.9 watts	
HEIGHT,WIDTH,DEPTH	15 \frac{5}{8}" \times 50 \frac{1}{4} " \times 5 \frac{1}{2}"	
GLASS VIEWING OPENING	48 ½" ×13 ½"	
SURROUND SIZE	52 ½ "×16 ½ "	
SHIPPING SIZE	59 ½ " × 10 ½ "× 21 ½ "	
SHIPPING WEIGHT	82.50 LBS	
UNIT		
GLASS FRONT	Included	
PLUG LOCATION	Left Side	
CORD LENGTH	70 ½ " <l<95 td="" ½"<=""></l<95>	
APPROX. HEATING AREA	400 sq ft	




SERIES	MODEL		REV.
BESPOKE	SYM-50		1
SCALE	DATE: 22/6/2020	SHEET 1 C)F 1

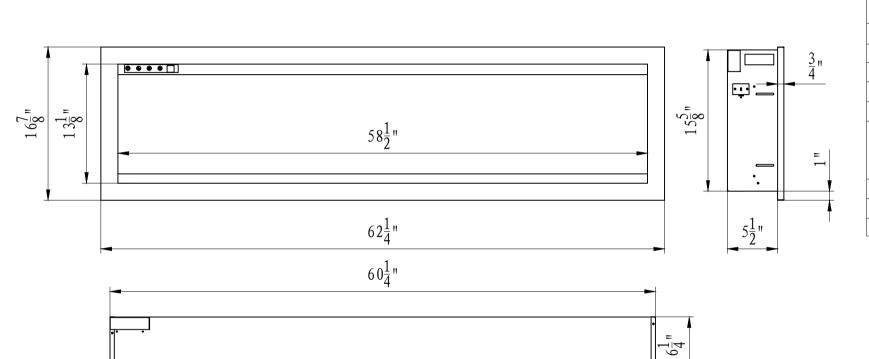

TECHNICAL SPECIFICATIONS			
VOLTS	120 V		
AMPS	12.5 A		
WATTS	1465 watts		
HEATER HIGH	1465 watts		
LOW	750 watts		
NO HEATER	31 watts Max.		
LAMPS TYPE	LED		
TOTAL WATTS	28 watts		
ROTOR MOTOR	1 at 2.9 watts		
HEIGHT,WIDTH,DEPTH	15 \frac{5}{8}" \times 60 \frac{1}{4} " \times 5 \frac{1}{2}"		
GLASS VIEWING OPENING	58 ½" ×13 ½"		
SURROUND SIZE	62 ½ "×16 ½ "		
SHIPPING SIZE	69 ½ " × 10 ½ "× 21 ½ "		
SHIPPING WEIGHT	101.20 LBS		
UNIT			
GLASS FRONT	Included		
PLUG LOCATION	Left Side		
CORD LENGTH	70 ⁷ / ₈ " <l<95 <sup="">1/₂"</l<95>		
APPROX. HEATING AREA	400 sq ft		



SERIES	MODEL		REV.
BESPOKE	SYM-60		1
SCALE	DATE: 22/6/2020	SHEET 1 OF 1	

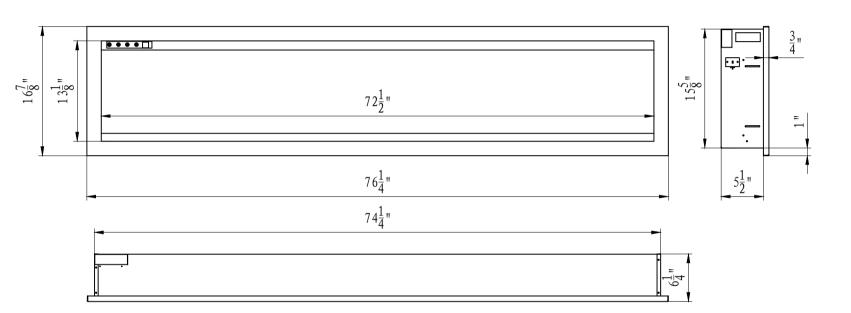

TECHNICAL SPECIFICATIONS VOLTS 120 V AMPS 12.5 A WATTS 1465 watts HEATER HIGH 1465 watts LOW 750 watts NO HEATER 36 watts Max. LAMPS TYPE LED TOTAL WATTS 35 watts **ROTOR MOTOR** 1 at 2.9 watts 15 \frac{5}{8}" \times 74 \frac{1}{4} " \times 5 \frac{1}{2}" HEIGHT, WIDTH, DEPTH $72\frac{1}{2}$ " × $13\frac{1}{8}$ " GLASS VIEWING OPENING 76 ½ "×16 ½ " SURROUND SIZE 85 " × 11 ½" × 22 ½" SHIPPING SIZE 121.25 LBS SHIPPING WEIGHT UNIT **GLASS FRONT** Included PLUG LOCATION Left Side CORD LENGTH 70 ⁷/₈ " <L<95 ¹/₂"

400 sq ft



APPROX. HEATING AREA

	SERIES	MODEL		REV.
	BESPOKE	SYM-74		1
	SCALE	DATE: 11/11/2020	SHEET 1 OF 1	