




Order No. **500002573**  
 Model No. **500002573 (Ignite Evolve 50 inch)**

Notes:

## Product Dimensions:


Installs without trim to stone, brick and other solid finish materials; includes trim for drywall and tile surfaces.

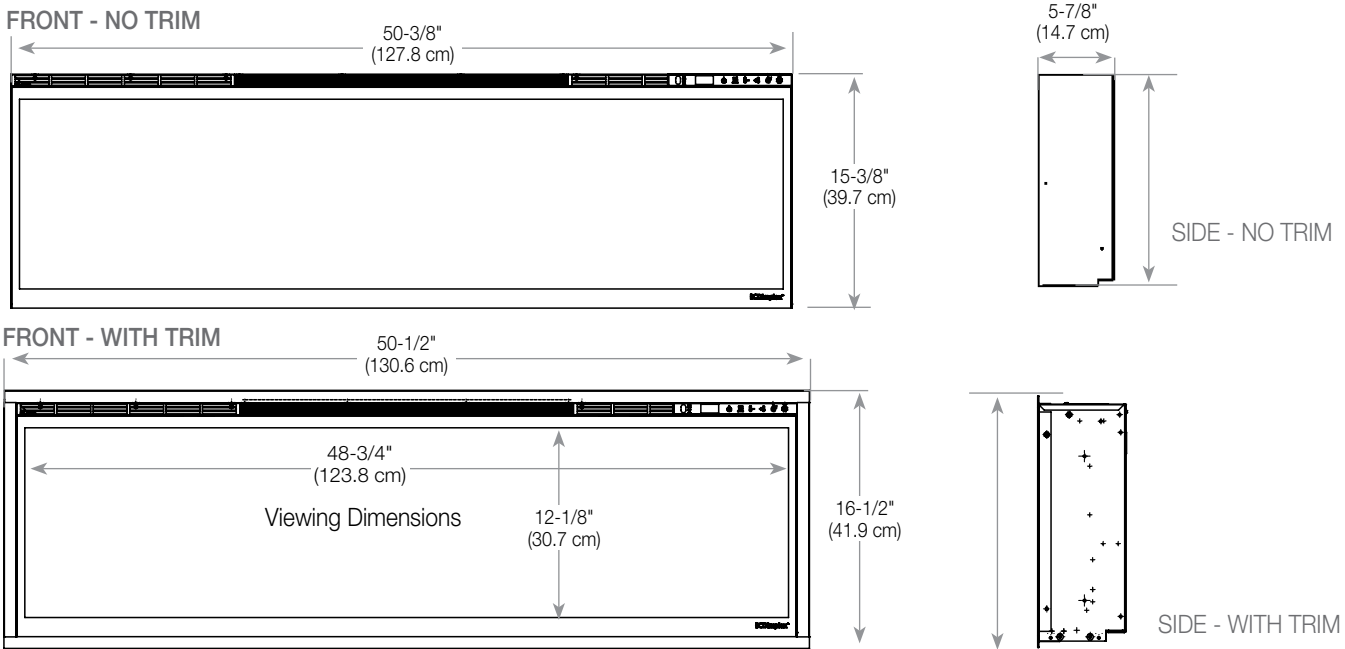

## Framing Dimensions:

NOTE: The bottom sill needs to be a minimum of 3-1/2" (8.9 cm) deep. The sill can be constructed to support the front of the unit to allow the power supply wires to easily be run behind or flush with the back of the unit and a pass through hole drilled for electrical wire routing.

It is recommended that the bottom of the unit be mounted between 30" (76.2 cm) and 40" (102 cm) from the ground to maintain an optimized viewing angle of the flame.

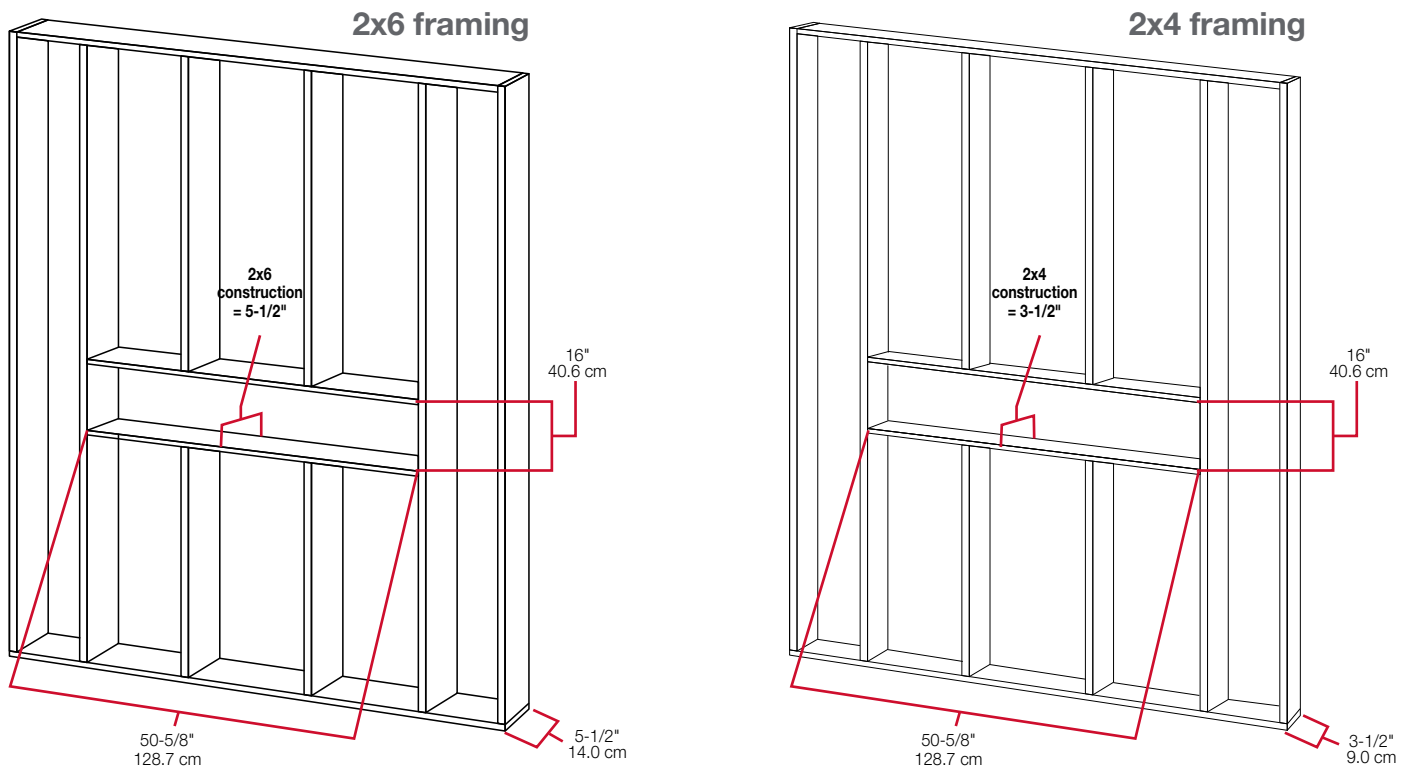




Order No. **500002574**  
 Model No. **500002574 (Ignite Evolve 60 inch)**

Notes:


## Product Dimensions:

Installs without trim to stone, brick and other solid finish materials; includes trim for drywall and tile surfaces.

FRONT - NO TRIM

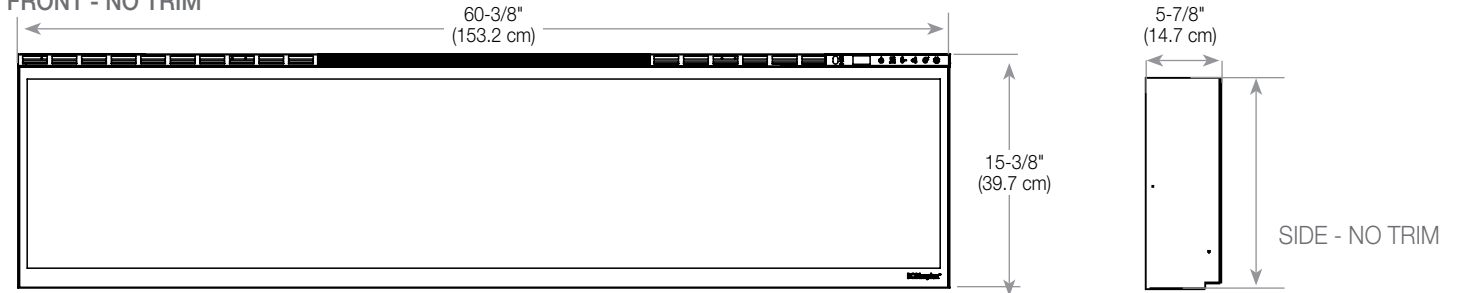

FRONT - WITH TRIM

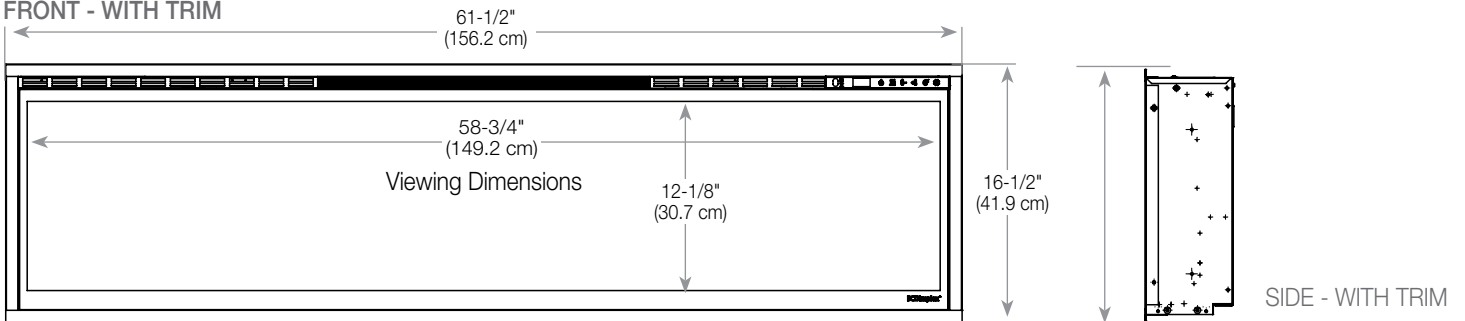


## Framing Dimensions:


NOTE: The bottom sill needs to be a minimum of 3-1/2" (8.9 cm) deep. The sill can be constructed to support the front of the unit to allow the power supply wires to easily be run behind or flush with the back of the unit and a pass through hole drilled for electrical wire routing.

It is recommended that the bottom of the unit be mounted between 30" (76.2 cm) and 40" (102 cm) from the ground to maintain an optimized viewing angle of the flame.

2x6 framing

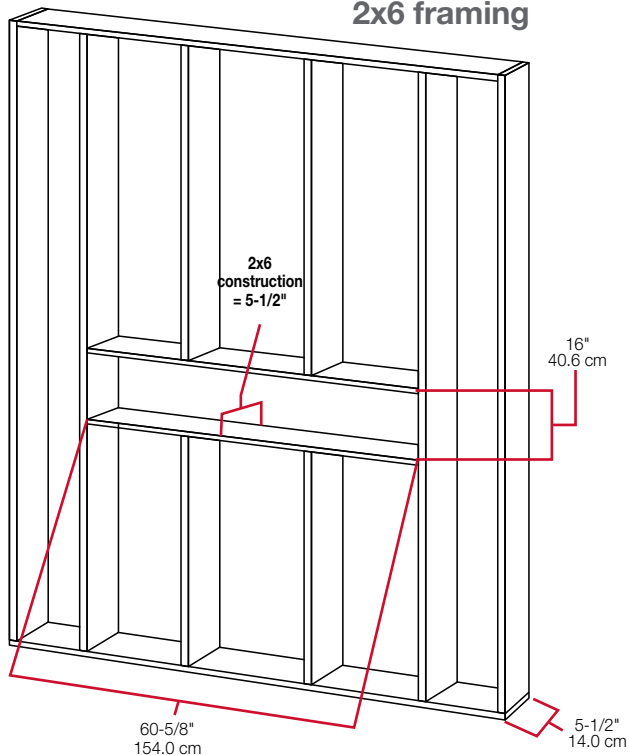

2x4 framing

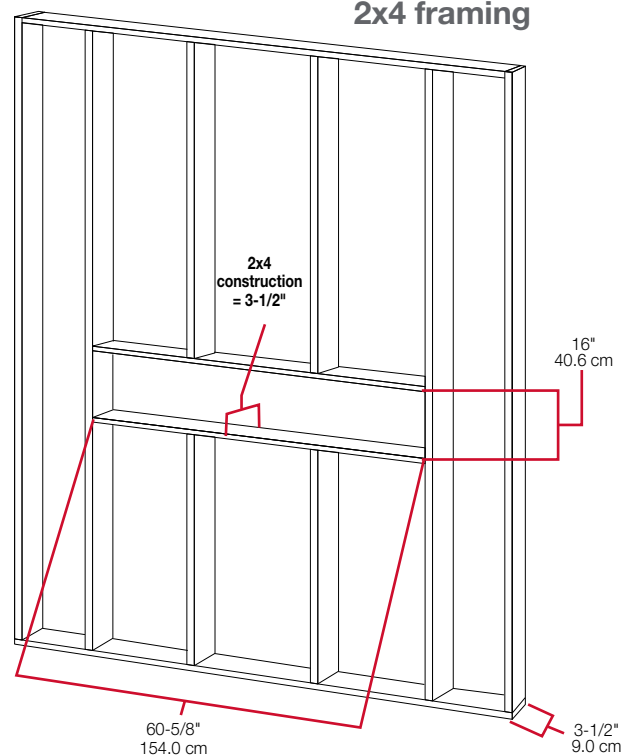




Order No. **500002608**  
Model No. **500002608 (Ignite Evolve 74 inch)**

Notes:


## Product Dimensions:

Installs without trim to stone, brick and other solid finish materials; includes trim for drywall and tile surfaces.

FRONT - NO TRIM

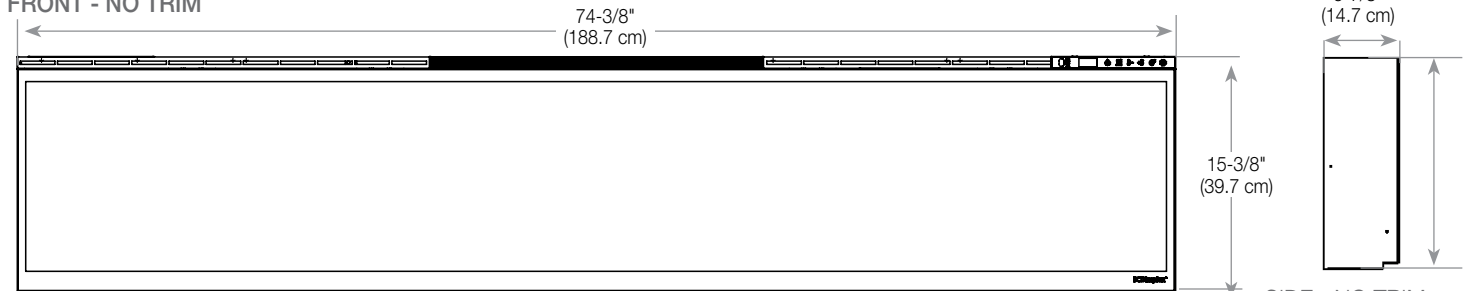

FRONT - WITH TRIM

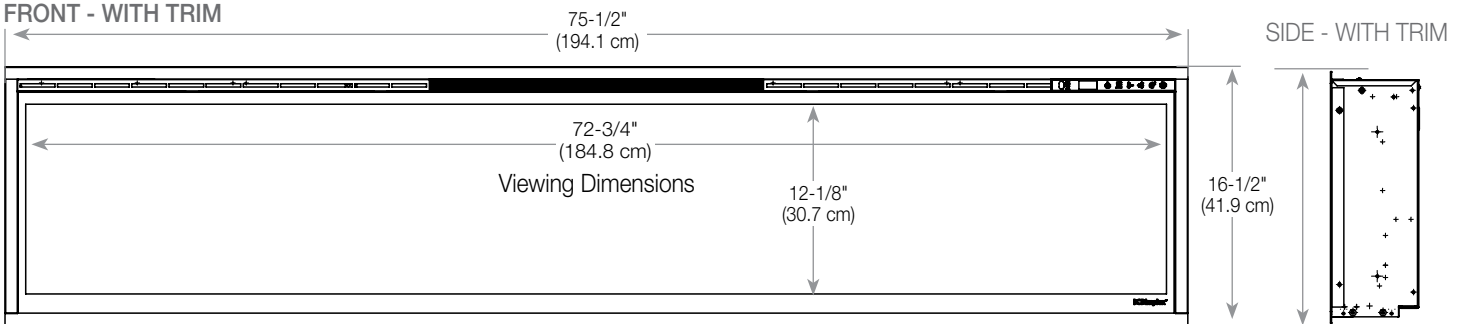


## Framing Dimensions:


NOTE: The bottom sill needs to be a minimum of 3-1/2" (8.9 cm) deep. The sill can be constructed to support the front of the unit to allow the power supply wires to easily be run behind or flush with the back of the unit and a pass through hole drilled for electrical wire routing.

It is recommended that the bottom of the unit be mounted between 30" (76.2 cm) and 40" (102 cm) from the ground to maintain an optimized viewing angle of the flame.

2x6 framing

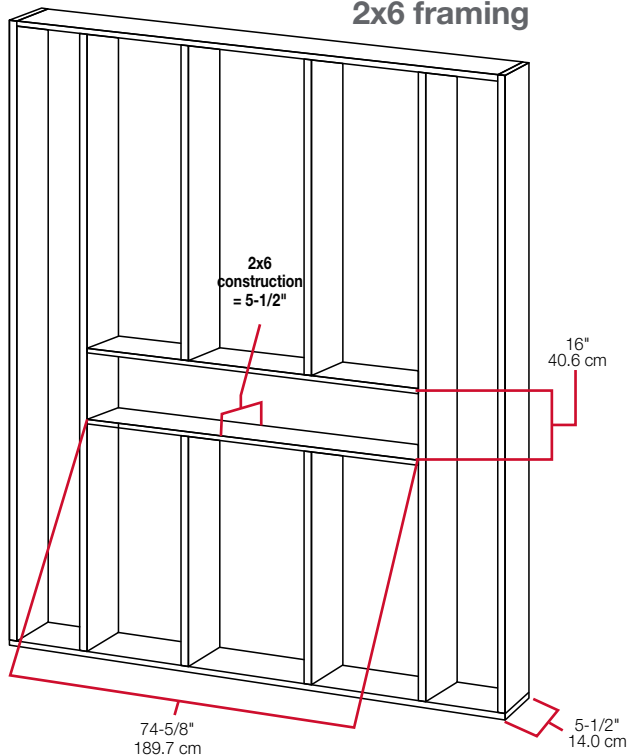

2x4 framing

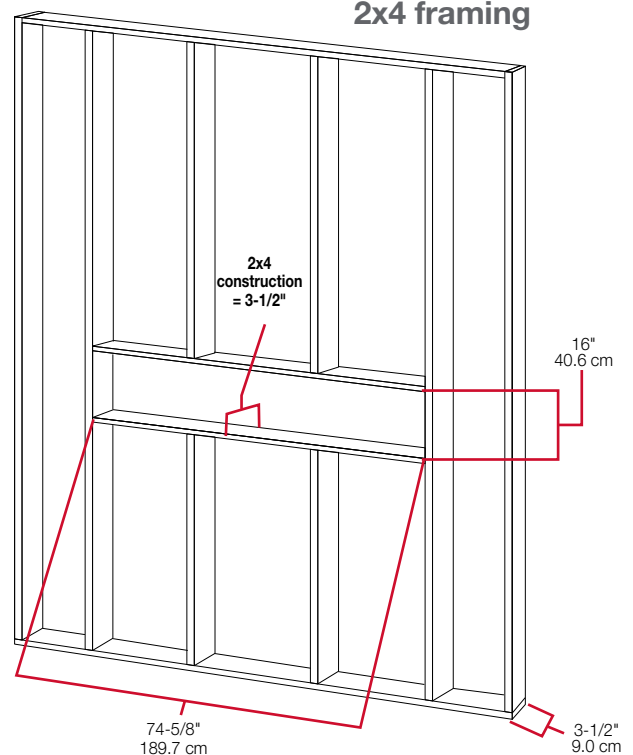




Order No. **500002563**  
Model No. **500002563 (Ignite Evolve 100 inch)**

Notes:

## Product Dimensions:

Installs without trim to stone, brick and other solid finish materials; includes trim for drywall and tile surfaces.

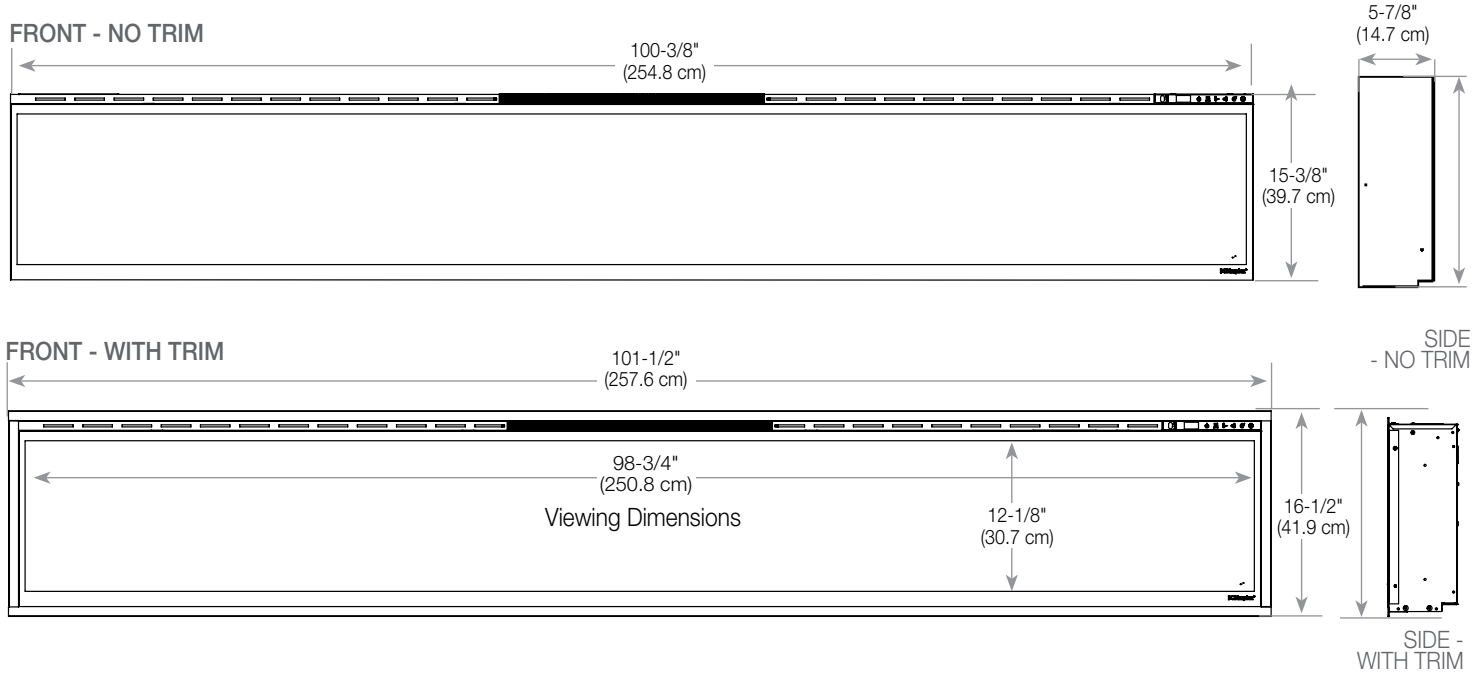

## Framing Dimensions:

NOTE: The bottom sill needs to be a minimum of 3-1/2" (8.9 cm) deep. The sill can be constructed to support the front of the unit to allow the power supply wires to easily be run behind or flush with the back of the unit and a pass through hole drilled for electrical wire routing.

It is recommended that the bottom of the unit be mounted between 30" (76.2 cm) and 40" (102 cm) from the ground to maintain an optimized viewing angle of the flame.

