
Harmony 45" Electric Fireplace

Specifications Sheet



Model Length		Height	Height Depth Viewing		BTU	Cord Length
DY-BEF45	1131 mm	560 mm	219 mm	1054 mm x 335 mm	5000	1829 mm
DI-BEF43	44½ in.	22 in.	8% in.	41½ in. x 13¼ in.	3000	72 in.

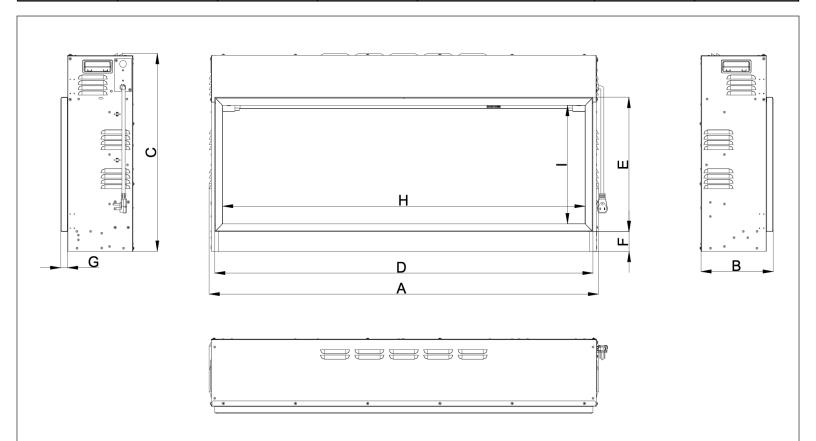

	A*	В	C*	О	Е	F	G	H	1
DY-BEF45	1131 mm	219 mm	560 mm	1156 mm	435 mm	57 mm	32 mm	1054 mm	335 mm
DI-BEF43	44½ in.	8% in.	22 in.	45½ in.	17½ in.	2¼ in.	1¼ in.	41½ in.	13¼ in.

^{*}A & C includes louver projections


Model	Circuit	Max Power Consumption	Lighting Only	Standby	Outlet	Certification
DY-BEF45	15A, 120V / 60Hz	1500 W	25 W	1.5 W	Standard (type B)Hardwire ready	CSA


Harmony 45" Electric Fireplace

Specifications Sheet




Clearances

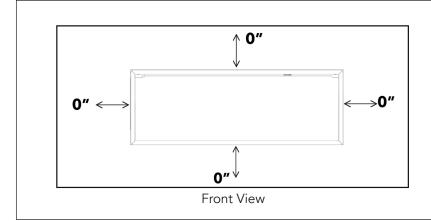



Minimum Clearances to Combustibles							
Тор 0"							
Sides	0"						
Back	0"						
Bottom 0"							
Front 36" / 0.9m							

Framing

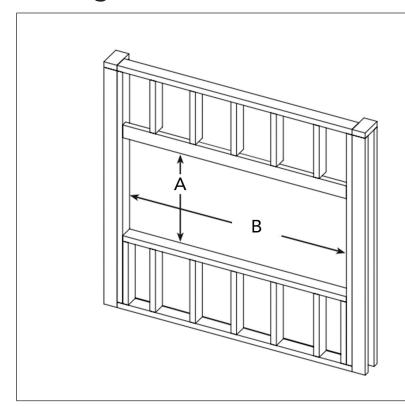

Framing Dimensions				
Α	22½ in.			
A	570 mm			
В	45 in.			
D	1145 mm			
Donth	8% in.			
Depth	225 mm			






Harmony 57" Electric Fireplace

Specifications Sheet



Model	Model Length		Height Depth Viewing Area		BTU	Cord Length
DY-BEF57	1432 mm	560 mm	219 mm	1356 mm x 335 mm	5000	1829 mm
DI-BEF3/	56¾ in.	22 in.	8% in.	53¾ in. x 13¼ in.	3000	72 in.

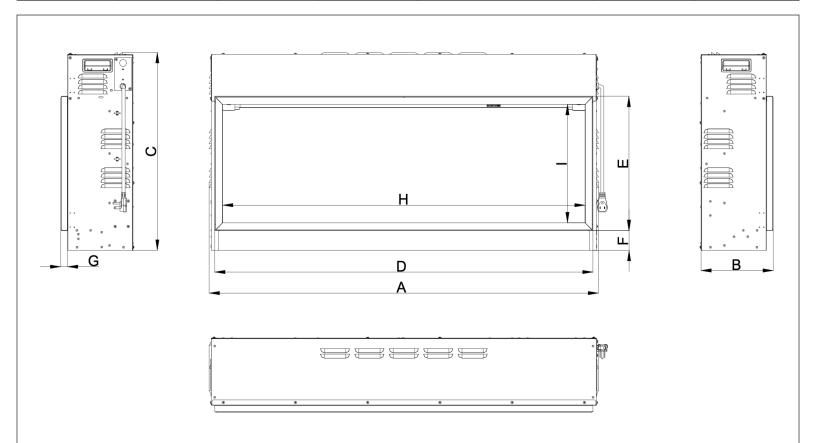

	A*	В	C*	D	Е	F	G	H	I
DY-BEF57	1432 mm	219 mm	560 mm	1454 mm	435 mm	57 mm	32 mm	1356 mm	335 mm
DI-BEF37	56¾ in.	8% in.	22 in.	57¼ in.	17½ in.	2¼ in.	1¼ in.	53¾ in.	13¼ in.

^{*}A & C includes louver projections


Model	Circuit	Max Power Consumption	Lighting Only	Standby	Outlet	Certification
DY-BEF57	15A, 120V / 60Hz	1500 W	32 W	1.5 W	Standard (type B)Hardwire ready	CSA


Harmony 57" Electric Fireplace

Specifications Sheet




Clearances

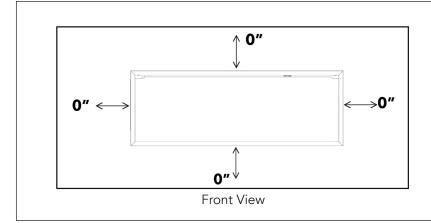



Minimum Clearances to Combustibles						
Тор 0"						
Sides	0"					
Back	0"					
Bottom 0"						
Front 36" / 0.9m						

Framing

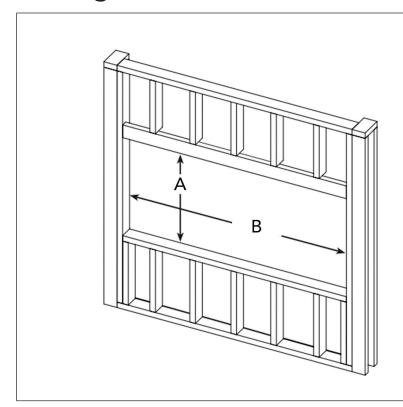

Framing Dimensions				
Α	22½ in.			
A	570 mm			
В	57 in.			
ט	1445 mm			
Donth	8% in.			
Depth	225 mm			






Harmony 64" Electric Fireplace

Specifications Sheet



Model	Model Length		Depth	Viewing Area	BTU	Cord Length
DY-BEF64	1632 mm	560 mm	219 mm	1556 mm x 335 mm	5000	1829 mm
DT-BEF04	64¼ in.	22 in.	8% in.	61¼ in. x 13¼ in.	3000	72 in.

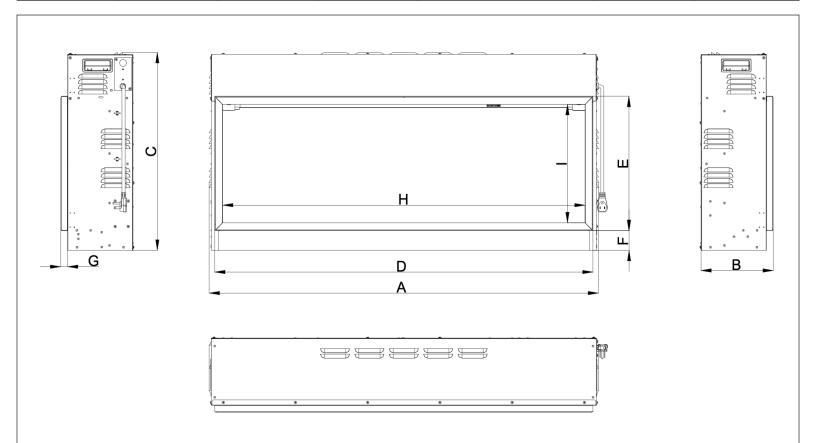

	A*	В	C*	О	Е	F	G	H	I
DY-BEF64	1632 mm	219 mm	560 mm	1654 mm	435 mm	57 mm	32 mm	1556 mm	335 mm
DI-BEF04	64¼ in.	8% in.	22 in.	65⅓ in.	17½ in.	2¼ in.	1¼ in.	61¼ in.	13¼ in.

^{*}A & C includes louver projections


Model	Circuit	Max Power Consumption	Lighting Only	Standby	Outlet	Certification
DY-BEF64	15A, 120V / 60Hz	1500 W	34 W	1.5 W	Standard (type B)Hardwire ready	CSA


Harmony 64" Electric Fireplace

Specifications Sheet




Clearances

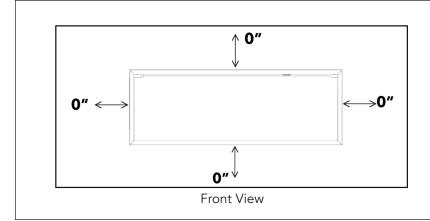



Minimum Clearances to Combustibles			
Тор	0"		
Sides	0"		
Back	0"		
Bottom	0"		
Front	36" / 0.9m		

Framing

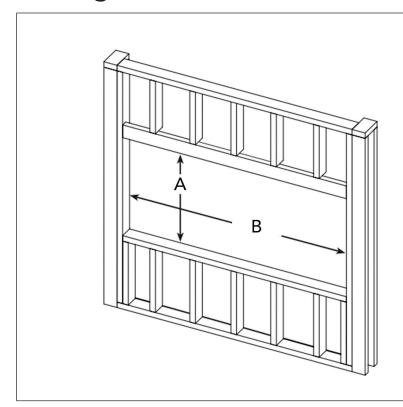

Framing Dimensions			
Α	22½ in.		
^	570 mm		
В	65 in.		
ט	1650 mm		
Depth	8% in.		
Depui	225 mm		






Harmony 80" Electric Fireplace

Specifications Sheet



Model	Length	Height	Depth	Viewing Area	BTU	Cord Length
DY-BEF80	2032 mm	560 mm	219 mm	1956 mm x 335 mm	5000	1829 mm
D1-BEF60	80 in.	22 in.	8% in.	77 in. x 13¼ in.	3000	72 in.

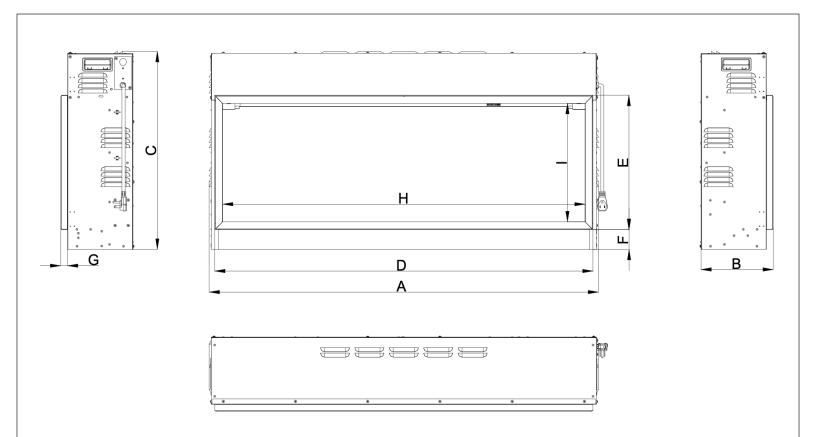

	A*	В	C*	О	Е	F	G	H	I
DY-BEF80	1131 mm	219 mm	560 mm	1156 mm	435 mm	57 mm	32 mm	1054 mm	335 mm
DI-BEFOU	44½ in.	8% in.	22 in.	45½ in.	17⅓ in.	2¼ in.	1¼ in.	41½ in.	13¼ in.

^{*}A & C includes louver projections


Model	Circuit	Max Power Consumption	Lighting Only Standby		Outlet	Certification
DY-BEF80	15A, 120V / 60Hz	1500 W	45 W	1.5 W	Standard (type B)Hardwire ready	CSA


Harmony 80" Electric Fireplace

Specifications Sheet




Clearances

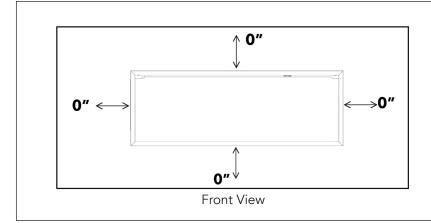



Minimum Clearances to Combustibles			
Тор	0"		
Sides	0"		
Back	0"		
Bottom	0"		
Front	36" / 0.9m		

Framing

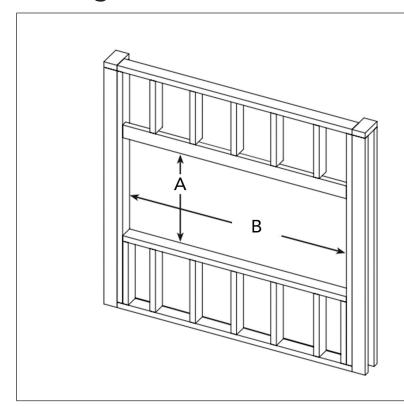

Framing Dimensions			
Α	22½ in.		
(570 mm		
В	81 in.		
U	2058 mm		
Depth	8% in.		
Deptil	225 mm		



