
Cascade 42" Electric Fireplace

Specifications Sheet



Model	Length	Height	Depth	Viewing Area	BTU	Cord Length
DY-BTX42	1079 mm	514 mm	165 mm	946 mm x 381 mm	5000	1829 mm
01-01/42	42 ½ in.	20 ¼ in.	6 ½ in.	37 ¼ in. x 15 in.	3000	72 in.

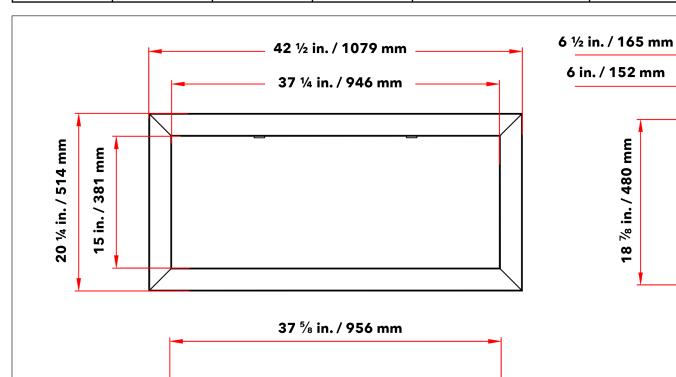


Circuit	Max Power Consumption	Lighting Only	Standby	Outlet	Certification
15A, 120V / 60Hz	1500 W	25 W	1.5 W	Standard (type B)	CSA


Cascade 42" Electric Fireplace

Specifications Sheet




Clearances

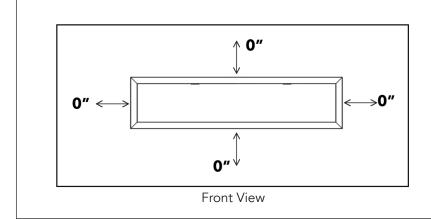



Minimum Clearances to Combustibles				
Тор	0"			
Sides	0"			
Back	0"			
Bottom	0"			
Front	36" / 0.9m			

Framing

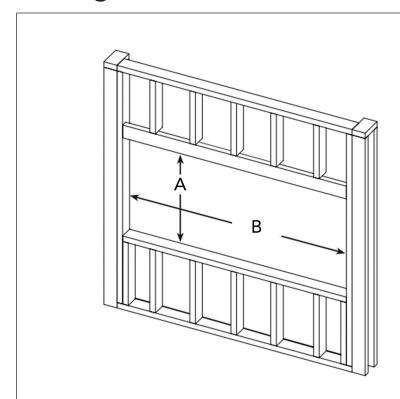

Framing Dimensions		
Α	19 ½ in.	
	495 mm	
В	38 ¾ in.	
Б	984 mm	
Depth	6 in.	
	153 mm	






Cascade 52" Electric Fireplace

Specifications Sheet



Model	Length	Height	Depth	Viewing Area	BTU	Cord Length
DY-BTX52	1333 mm	514 mm	165 mm	1200 mm x 381 mm	5000	1829 mm
D1-B1X32	52 ½ in.	20 ¼ in.	6 ½ in.	47 ¼ in. x 15 in.	3000	72 in.

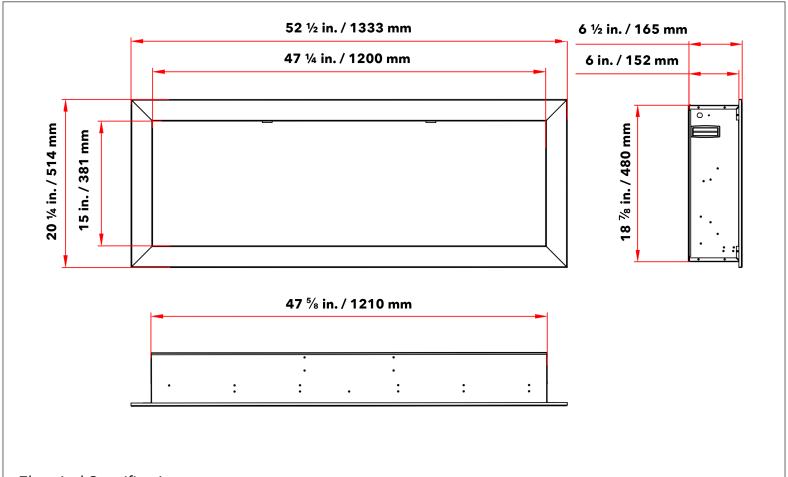


Circuit	Max Power Consumption	Lighting Only	Standby	Outlet	Certification
15A, 120V / 60Hz	1500 W	32 W	1.5 W	Standard (type B)	CSA


Cascade 52" Electric Fireplace

Specifications Sheet




Clearances

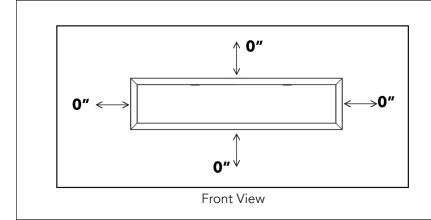



Minimum Clearances to Combustibles				
Тор	0"			
Sides	0"			
Back	0"			
Bottom	0"			
Front	36" / 0.9m			

Framing

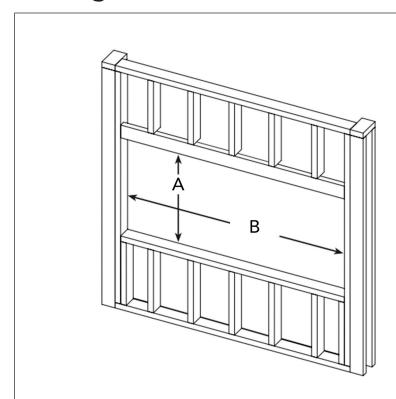

Framing Dimensions		
А	19 ½ in.	
	495 mm	
В	48 ¾ in.	
D	1238 mm	
Donth	6 in.	
Depth	153 mm	






Cascade 64" Electric Fireplace

Specifications Sheet



Model	Length	Height	Depth	Viewing Area	BTU	Cord Length
DY-BTX64	1638 mm	514 mm	165 mm	1505 mm x 381 mm	5000	1829 mm
01-01704	64 ½ in.	20 ¼ in.	6 ½ in.	59 ¼ in. x 15 in.	3000	72 in.

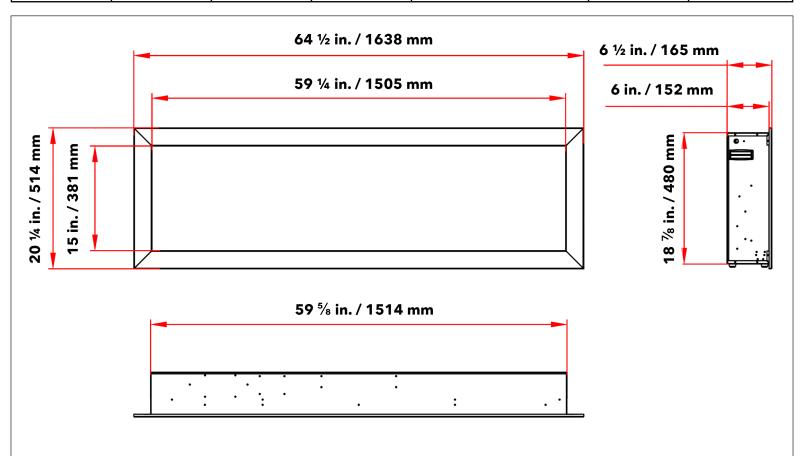


15A, 120V / 60Hz 1500 W 34 W 1.5 W Standard (type B) CSA	Circuit	Max Power Consumption	Lighting Only	Standby	Outlet	Certification
	15A, 120V / 60Hz	1500 W	34 W	1.5 W	Standard (type B)	CSA


Cascade 64" Electric Fireplace

Specifications Sheet




Clearances

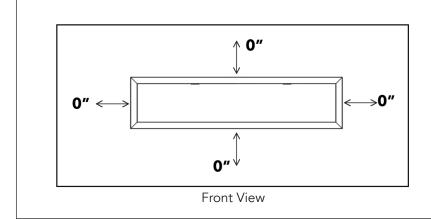



Minimum Clearances to Combustibles				
Тор	0"			
Sides	0"			
Back	0"			
Bottom	0"			
Front	36" / 0.9m			

Framing

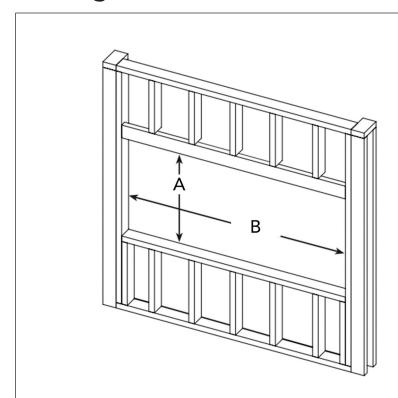

Framing Dimensions		
A B	19 ½ in.	
	495 mm	
	60 ¾ in.	
	1543 mm	
Depth	6 in.	
	153 mm	






Cascade 74" Electric Fireplace

Specifications Sheet



Model	Length	Height	Depth	Viewing Area	BTU	Cord Length
DY-BTX74	1892 mm	514 mm	165 mm	1759 mm x 381 mm	5000	1829 mm
01-017/4	74 ½ in.	20 ¼ in.	6 ½ in.	69 ¼ in. x 15 in.	5000	72 in.

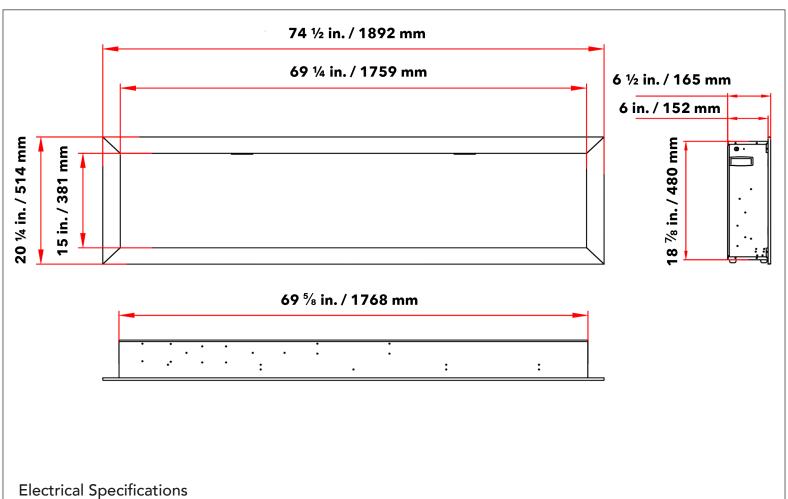


Circuit	Max Power Consumption	Lighting Only	Standby	Outlet	Certification
15A, 120V / 60Hz	1500 W	41 W	1.5 W	Standard (type B)	CSA


Cascade 74" Electric Fireplace

Specifications Sheet




Clearances

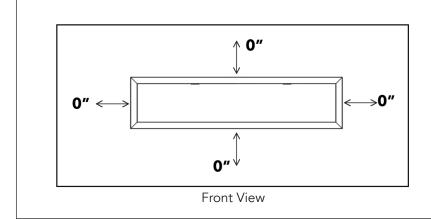



Minimum Clearances to Combustibles				
Тор	0"			
Sides	0"			
Back	0"			
Bottom	0"			
Front	36" / 0.9m			

Framing

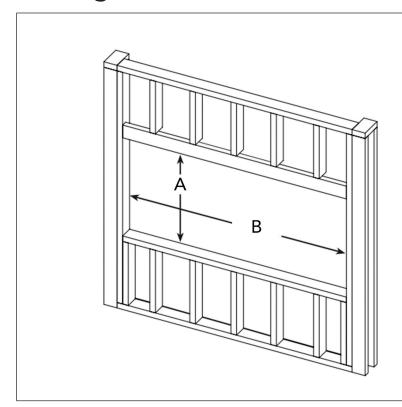

Framing Dimensions				
А	19 ½ in.			
A	495 mm			
В	70 ¾ in.			
D	1797 mm			
Donth	6 in.			
Depth	153 mm			






Cascade 82" Electric Fireplace

Specifications Sheet



Model	Length	Height	Depth	Viewing Area	BTU	Cord Length
DY-BTX82	2096 mm	514 mm	165 mm	1962 mmx 381 mm	5000	1829 mm
D1-B1X02	82 ½ in.	20 ¼ in.	6 ½ in.	77 ¼ in. x 15 in.	3000	72 in.

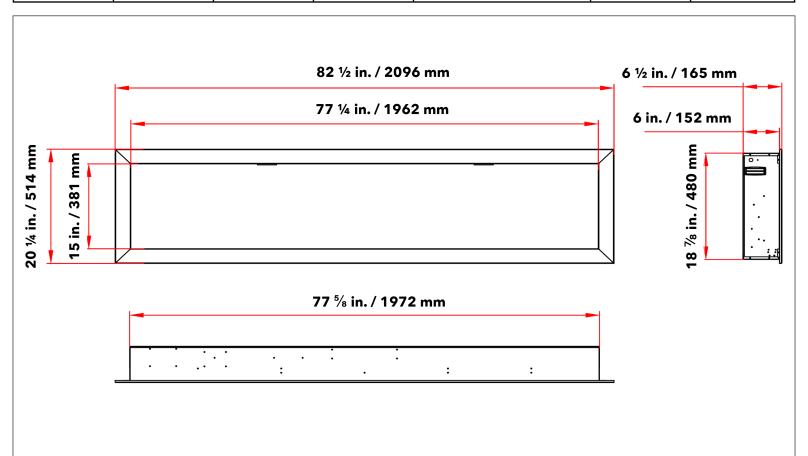


15A, 120V / 60Hz 1500 W 46 W 1.5 W Standard (type B) CSA	Circuit	Max Power Consumption	Lighting Only	Standby	Outlet	Certification
	15A, 120V / 60Hz	1500 W	46 W	1.5 W	Standard (type B)	CSA


Cascade 82" Electric Fireplace

Specifications Sheet




Clearances

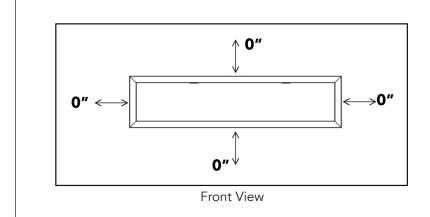



Minimum Clearances to Combustibles				
Тор	0"			
Sides	0"			
Back	0"			
Bottom	0"			
Front	36" / 0.9m			

Framing

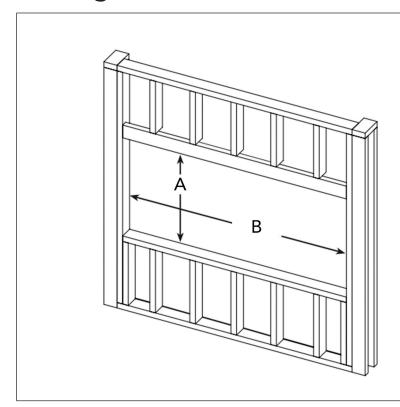

Framing Dimensions			
Д	19 ½ in.		
A	495 mm		
В	78 ½ in.		
D	1994 mm		
Donth	6 in.		
Depth	153 mm		



