
# **Melody DY-BTS35 Electric Fireplace**

## **Specifications Sheet**



Model	Circuit	Max. Power	Lighting Only	Standby	Outlet	Viewing Area	BTU	Cord Length
DY-BTS3	5 15A, 120V / 60HZ	1500 W	27 W	1 5 \\	• Standard (type B)	840 mm W x 506 mm H	5000	1829 mm
DI-B133	15A, 120V / 60HZ	1300 W	27 VV	1.5 W	<ul> <li>Hardwire ready</li> </ul>	33 in. W x 20 in. H	3000	72 in.

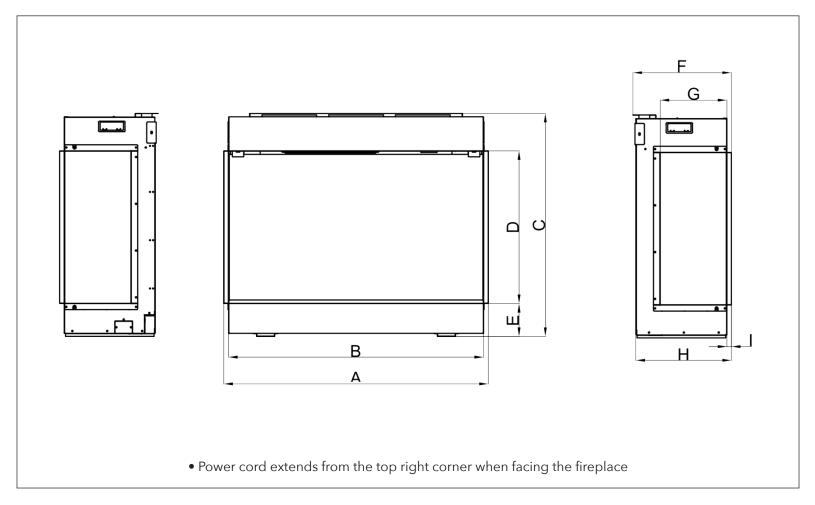

Model	Α	В	С	D	Е	F	G	Н	1
DY-BTS35	872 mm	840 mm	739 mm	506 mm	110 mm	325 mm	220 mm	315 mm	15 mm
D1-D1333	34 ¾ in.	33 in.	29 in.	20 in.	4 ¾ in.	12 ¾ in.	8 % in.	12 ¾ in.	½ in.

### Certification





## Melody DY-BTS35 Electric Fireplace

**Specifications Sheet** 



#### **Clearances**

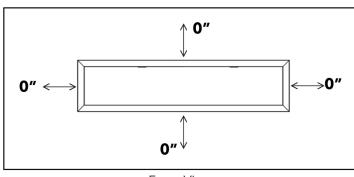




Minimum Clearances to Combustibles						
Тор	0"					
Sides	0"					
Back	0"					
Bottom	0"					
Front	36" / 0.9m					

Front View

Side View

- No clearance requirements on top, bottom, left, and right sides of the fireplace in 1-sided, 2-sided, or 3-sided configuration
  - Keep furniture, drapery or items at least 3 ft / 0.9m away from the front of the fireplace

### **Framing**

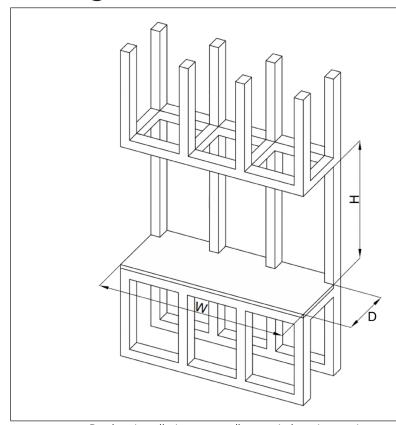

#### Framing Dimensions

W	Н	Depth		
850 mm	749 mm	320 mm		
33 ½ in.	29 ½ in.	12 ½ in.		

Product installation must adhere strictly to instructions accompanying product to avoid risk of fire and potential injury






# **Melody DY-BTS40 Electric Fireplace**

## **Specifications Sheet**



Model	Circuit	Max. Power	Lighting Only	Standby	Outlet	Viewing Area	BTU	Cord Length
DY-BTS40	15A, 120V / 60HZ	1500 W	28 W	1.5 W		1000 mm W x 400 mm H	5000	1829 mm
D1-D1340	13A, 1207 7 00112	1300 W	20 W	1.5 VV	<ul> <li>Hardwire ready</li> </ul>	39 ¾ in. W x 15 ¾ in. H	3000	72 in.

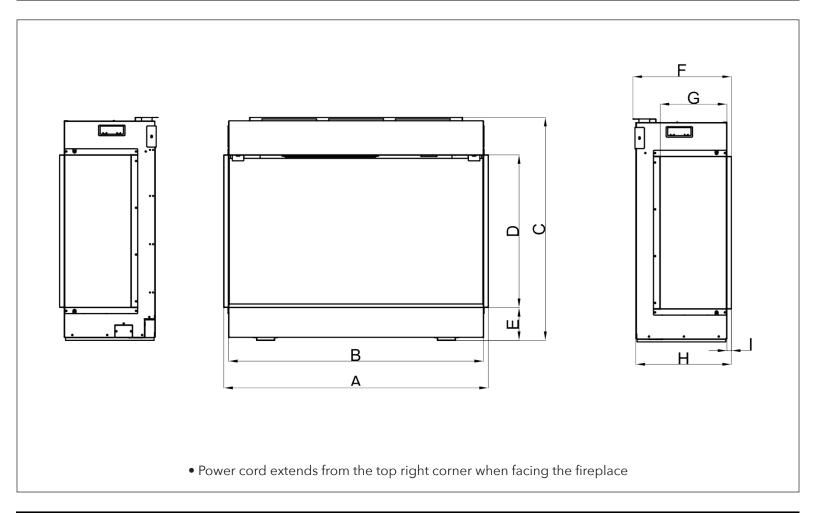

Model	Α	В	С	D	Е	F	G	Н	1
DY-BTS40	1032 mm	1000 mm	633 mm	400 mm	110 mm	325 mm	220 mm	315 mm	15 mm
D1-B1340	40 % in.	39 ¾ in.	25 in.	15 ¾ in.	4 ¾ in.	12 ¾ in.	8 % in.	12 ¾ in.	½ in.

### Certification





## Melody DY-BTS40 Electric Fireplace

**Specifications Sheet** 



#### **Clearances**

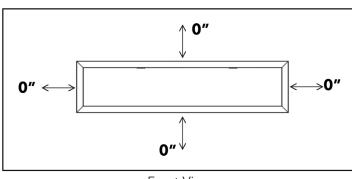




Minimum Clearances to Combustibles						
Тор	0"					
Sides	0"					
Back	0"					
Bottom	0"					
Front	36" / 0.9m					

Front View

Side Viev

- No clearance requirements on top, bottom, left, and right sides of the fireplace in 1-sided, 2-sided, or 3-sided configuration
  - Keep furniture, drapery or items at least 3 ft / 0.9m away from the front of the fireplace

### **Framing**

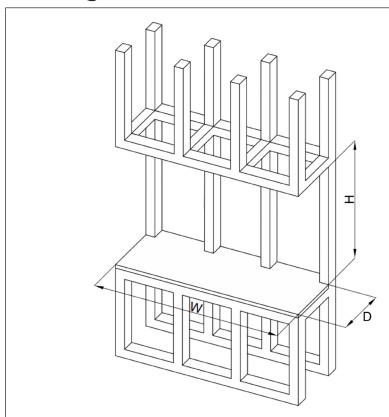

#### Framing Dimensions

W	Н	Depth
1010 mm	643 mm	320 mm
39 ¾ in.	25 ¾ in.	12 ½ in.

Product installation must adhere strictly to instructions accompanying product to avoid risk of fire and potential injury






# **Melody DY-BTS60 Electric Fireplace**

## **Specifications Sheet**



Model	Circuit	Max. Power	Lighting Only	Standby	Outlet	Viewing Area	BTU	Cord Length
DY-BTS60	15A, 120V / 60HZ	1500 W	46 W	1.5 W		1600 mm W x 400 mm H	5000	1829 mm
D1-B1300	13A, 120V / 00112	1300 W	40 00	1.5 VV	Hardwire ready	63 in. W x 15 ¾ in. H	3000	72 in.

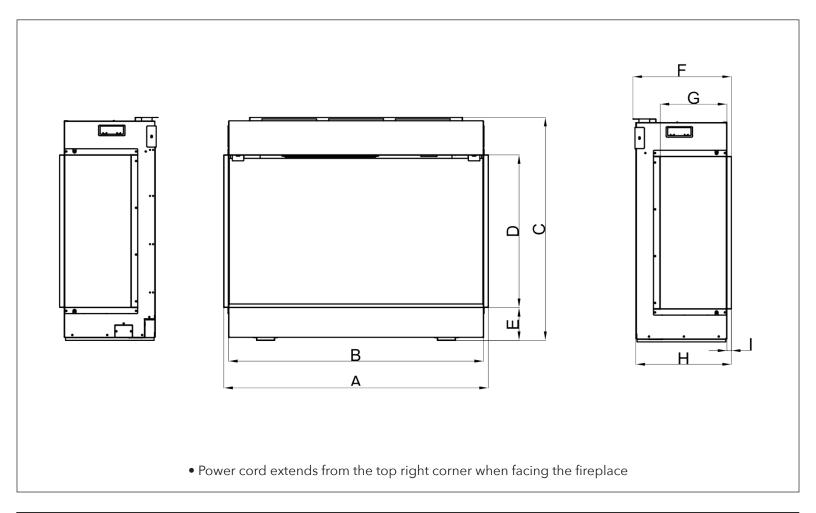

Model	Α	В	С	D	Е	F	G	Н	I
DY-BTS60	1632 mm	1600 mm	633 mm	400 mm	110 mm	325 mm	220 mm	315 mm	15 mm
טו-טוס	64 ¼ in.	63 in.	25 in.	15 ¾ in.	4 ¾ in.	12 ¾ in.	8 % in.	12 ¾ in.	½ in.

### Certification





## Melody DY-BTS60 Electric Fireplace

**Specifications Sheet** 



#### **Clearances**

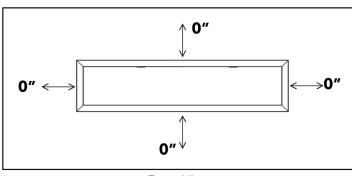




Minimum Clearances to Combustibles						
Тор	0"					
Sides	0"					
Back	0"					
Bottom	0"					
Front	36" / 0.9m					

Front View

Side View

- No clearance requirements on top, bottom, left, and right sides of the fireplace in 1-sided, 2-sided, or 3-sided configuration
  - Keep furniture, drapery or items at least 3 ft / 0.9m away from the front of the fireplace

### **Framing**

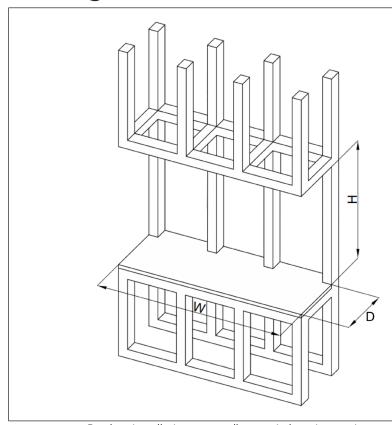

#### Framing Dimensions

W	Н	Depth
1610 mm	643 mm	320 mm
63 ¾ in.	25 ¾ in.	12 ½ in.

Product installation must adhere strictly to instructions accompanying product to avoid risk of fire and potential injury



