



PICTURED: OFP-48LECO-NLED

KALEA BAY

LED & NON-LED
MODELS

OUTDOOR LINEAR GAS FIREPLACE

Make a modern statement with the all new Kalea Bay LED & Non-LED outdoor linear gas fireplace. Designed with a clean and contemporary style in mind, no chimney or venting required makes it an ideal product for quick & efficient framing & finishing.

LED Models: Full spectrum lighting - Requires 120Vac power

Non-LED Models: Battery-operated Ignition

Four Sizes 36" / 48" / 60" / 72", all 16" tall opening

Burner & firebox constructed of weather/corrosion resistant 304 stainless steel

Ecoflow Electronic Ignition System features built in safety shutoff in case of loss of flame and auto-relight. You can choose between intermittent or continuous pilot modes

Control Center with each model housed in 304 Stainless Steel Cabinet

Built in RF (Radio Frequency) Receiver allowing you to add up to three (3) optional Skytech Remote Controls

See-Through Conversion Kits available

Ships as Natural Gas (NG). Field Convertible to Liquid Propane (LP), Conversion Kits sold separately

Tested & Approved to: ANSI Z21.97 / CSA 2.41 standards

Made in the USA



MODELS

LED MODELS

OFP-36LECO-NLED

36" W x 16" H Opening Dimensions

Natural Gas (31,000 Btu on High, 18,500 Btu on Low)

Liquid Propane (30,000 Btu on High, 19,500 Btu on Low)

OFP-48LECO-NLED

48" W x 16" H Opening Dimensions

Natural Gas (43,500 Btu on High, 24,500 Btu on Low)

Liquid Propane (42,500 Btu on High, 29,000 Btu on Low)

OFP-60LECO-NLED

60" W x 16" H Opening Dimensions

Natural Gas (50,000 Btu on High, 36,000 Btu on Low)

Liquid Propane (50,000 Btu on High, 36,000 Btu on Low)

OFP-72LECO-NLED

72" W x 16" H Opening Dimensions

Natural Gas (65,000 Btu on High, 42,000 Btu on Low)

Liquid Propane (60,000 Btu on High, 45,000 Btu on Low)

NON-LED MODELS

OFP-36LECO-N

36" W x 16" H Opening Dimensions

Natural Gas (31,000 Btu on High, 18,500 Btu on Low)

Liquid Propane (30,000 Btu on High, 19,500 Btu on Low)

OFP-48LECO-N

48" W x 16" H Opening Dimensions

Natural Gas (43,500 Btu on High, 24,500 Btu on Low)

Liquid Propane (42,500 Btu on High, 29,000 Btu on Low)

OFP-60LECO-N

60" W x 16" H Opening Dimensions

Natural Gas (50,000 Btu on High, 36,000 Btu on Low)

Liquid Propane (50,000 Btu on High, 36,000 Btu on Low)

OFP-72LECO-N

72" W x 16" H Opening Dimensions

Natural Gas (65,000 Btu on High, 42,000 Btu on Low)

Liquid Propane (60,000 Btu on High, 45,000 Btu on Low)

DIMENSIONS & CLEARANCES

MODEL	OVERALL LENGTH	INSIDE OPENING	OVERALL HEIGHT	OPENING HEIGHT & DEPTH	LEG HEIGHT	VALVE BOX DEPTH	CLEARANCE TO SIDE WALL (SINGLE SIDED)	CLEARANCE TO SIDE WALL (SEE THROUGH)	CLEARANCE TO CEILING
OFP-36	40"	36"	33 1/2"	16"	11 1/2"	8 3/4"	6"	36"	46 1/2"
OFP-48	52"	48"	33 1/2"	16"	11 1/2"	8 3/4"	6"	36"	46 1/2"
OFP-60	64"	60"	33 1/2"	16"	11 1/2"	8 3/4"	6"	36"	46 1/2"
OFP-72	76"	72"	33 1/2"	16"	11 1/2"	8 3/4"	6"	36"	46 1/2"



PICTURED: OFP-72LECO-N with See-Through Conversion Kit: 76231

PICTURED: OFP-48LECO-NLED

CONTROL CENTER

LED CONTROLS



Use the RGB dials to get your desired color, there are over 16 million to choose from!

- On / Off**
Turn on and off the unit
- Low / High**
Control the flame height
- Continuous Pilot**
Keep the Pilot Light on
- Learn**
Add an accessory remote
- LED**
Turn on and off the lights


NON-LED CONTROLS




Easy access to the battery tray makes maintenance for the Kalea Bay a breeze.

- On / Off**
Turn on and off the unit
- Low / High**
Control the flame height
- Continuous Pilot**
Keep the Pilot Light on
- Learn**
Add an accessory remote


FRAMING

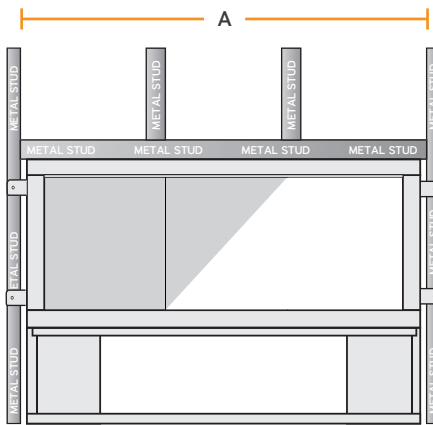

SINGLE-SIDED & SEE-THROUGH

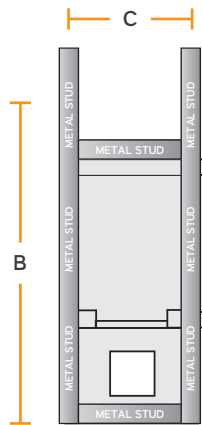

SINGLE-SIDED

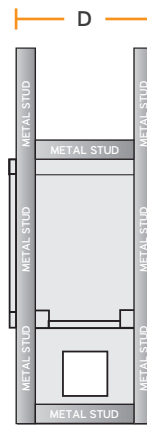

SEE-THROUGH


Model	A	B	C
OFP-36 Single Sided	40 1/2"	33 3/4"	15 3/4"
OFP-48 Single Sided	52 1/2"	33 3/4"	15 3/4"
OFP-60 Single Sided	64 1/2"	33 3/4"	15 3/4"
OFP-72 Single Sided	76 1/2"	33 3/4"	15 3/4"

Model	A	B	D
OFP-36 See-Through	40 1/2"	33 3/4"	15"
OFP-48 See-Through	52 1/2"	33 3/4"	15"
OFP-60 See-Through	64 1/2"	33 3/4"	15"
OFP-72 See-Through	76 1/2"	33 3/4"	15"

PLEASE NOTE: This outdoor fireplace is not a "load bearing" fireplace. All finishing materials must be supported by the surrounding structure and not rely on the fireplace itself.

SEE-THROUGH CONVERSION

Every Kalea Bay can be easily converted to a see-through outdoor fireplace. We offer optional kits which include a glass windshield, brackets, stainless steel hood & step-by-step instructions on how to convert the Kalea Bay.

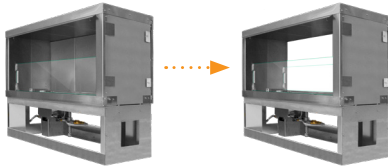

KALEA BAY	CONVERSION KIT
OFP-36LECO-NLED	78002
OFP-48LECO-NLED	78004
OFP-60LECO-NLED	78006
OFP-72LECO-NLED	78008

KALEA BAY	CONVERSION KIT
OFP-36LECO-N	78009
OFP-48LECO-N	78010
OFP-60LECO-N	78011
OFP-72LECO-N	78012

LIQUID PROPANE KITS

Every Kalea Bay has the capability to be converted to use Liquid Propane (LP) rather than Natural Gas (NG). You can find step by step instructions in the Kalea Bay manual, which you will find on our website www.firegearoutdoors.com.



KALEA BAY SIZE	PROPANE KIT
36"	OFP-36LECO-LPK
48"	OFP-48LECO-LPK
60"	OFP-60LECO-LPK
72"	OFP-72LECO-LPK

CONTROLS & ACCESSORIES

The Ecoflow ignition system that comes standard with any Kalea Bay unit has a built-in RF receiver. This means that the receiver can learn up to three (3) additional transmitter security codes, giving you the option of how to control your Kalea Bay.



Wire Harness Extension

10ft harness for all LED and Non-Led models. Replacement harness for control of all appliance functions with exception of LED lighting. **(77161)**.

110ft harness for LED models only. Replacement harness for LED lighting functions. **(77111)**.

10ft control panel extension for LED models only. Accessory kit controls all appliance and LED functions, includes #77161 and #77111 **(78013)**

10ft control panel extension for NON-LED models only. Accessory kit controls all appliance functions and supplies power to module, includes #77161 and #VCS-ECOBUEXT120. **(78014)**



AF-4000HAT

Home / Pool automation system link. This works with most manufactures automation systems.



TM-R-AF1TX

Wireless wall timer 30min / 60min / 120min / OFF. Battery operated.



1001D-AF1TX

Wireless wall mount switch (ON/OFF). Battery operated.



RCAF-3TX

3-Step battery operated remote control to power an ON/OFF/HIGH/LOW internal solenoid.



ADP-10-OUT

Outdoor 7.5 Vdc power adapter. Available in 10 foot lengths.

Only for Non-LED models



THE BEST ROOM IN THE HOUSE
ISN'T IN THE HOUSE AT ALL

firegearoutdoors.com
Tech: 1.800.966.8126