phantomSchwank Series

The dark knight of patio heaters.

The phantomSchwank Series powerful performance and functionality redefine cutting-edge technology for outdoor comfort. Make the most of your patio space with phantomSchwank's intuitive smart wireless control, versatile mounting options, wind resistance, and ultra-quiet operation.

Optimal Serviceability

Accessible screwless latch with a swing-down cabinet for easy maintenance.

Easy field conversion from NG to LP.

Elusive Design

Phantom black powder-coated finish. Low profile model.

Intricate detailing of the front grille. Ultra-low clearances with versatile mounting configurations.

🛜 Built-In Smart Wireless Controls

Access via wireless mobile app and/or a web browser

Connect to your smart device.

Seamlessly pair with Schwank.ONE.

Flexibility to manage "zones" within the patio space.

Engineered for Performance

Energy-efficient EC Motor. Built with Marine-grade Aluminum Alloy. Optimized reflector for uniform heat distribution. Wind resistant fully enclosed model.

• Feature


- BTUh Input range: 35,000 115,000
- Lengths: 12 and 17 ft.
- Mounting: 8'-17' heights
- Fuel: 2-Stage Natural Gas (standard) or Propane (converted)
- Warranty: 10-year burner, 10-year tubes, 3-year components
- Motor: Energy-Efficient Direct Drive EC Motor



Dimensions and specifications

 \rightarrow

With a wide range of sizes and mounting options available, choose the ideal phantomSchwank model to use in your patio, or outdoor environment.

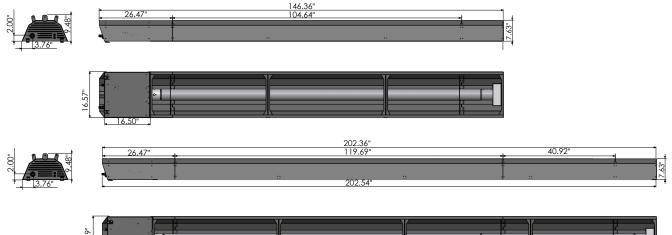




Model	Fuel Type	Input Rating (BTU/H)		Overall Length	Material: Housing	Weight (Ibs)	Conversion kit part number
		High	Low	(ft)			
STP-TA05-10-BN	NG	50,000	35,000	12		95	JS-0554-LL-TP
STP-TA08-10-BN	NG	80,000	60,000	12	Marine- Grade	96	JS-0554-NL-TP
STP-TA11-15-BN	NG	115,000	80,000	17	Aluminum	127	JS-0554-PL-TP


Note: Conversion kit is available to convert standard NG heater to LP model *Approximate gross shipping weight.

Clearance to combustibles

 \rightarrow

Model Input Rate	Suspended horizontally			Suspended at an angle up to 45 degrees				Tube End	
	Α	S	С	D	В	F	С	BE	TE
50,000	4"	20"	42"	4"	3"	40"	44"	24"	48"
80,000	5"	24"	62"	5"	3"	54"	60"	24"	48"
115,000	5"	26"	74"	5"	3"	62"	70"	24"	48"
								I	







BE

TE.