


Parco R350



Outdoor Parcan Parco R350


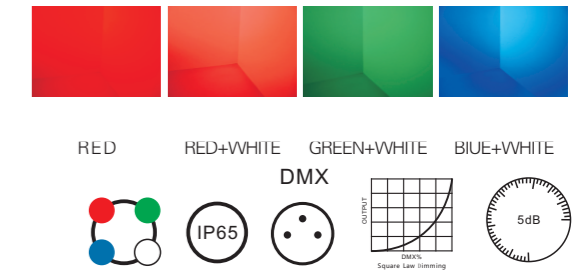


Specification:

- Light source : 18pcs*10W FULL RGBW LED,R=625nm, G=525nm,B=450nm, good saturation; White=6500K, Ra>85,Perfect color rendering;
- Light Output : 6750 Lumens
- Beam angle: 45° (15° /25° , optional)
- Control signal:DMX512, 32 bit precise dimming, smooth in low DMX Value dimming, not Jumping, no vision shock.
- Control mode: stand alone/master and slave
- Chanel option: 3/4/5/8/9 CH
- Housing material: tensile aluminum
- Housing color: White/black/silver.
- Protection rate: IP65
- Power input: AC100–240V (47–63Hz)
- Voltage output: DC24V
- Max power consumption: 120W
- Weight: 5KG
- Size: 284x193x254mm

Features:

- High power leds 10w each, with 4-in-1 color mixing tec
- 32 bit ARM processor dimming, 0–16666 PWM output, the dimming frequency is highly to 600Hz;
- DMX 512 signal control, 4 bit digital display DMX address code, easy to operate.
- Linear dimming for 0–100%, flicker free, with strobe/gradual change/color change/water effect inbuilt programs
- Stand alone, master/slave mode. Multi machine interconnect.
- Switch power, good for LED working.
- Temperature control system inside, auto reduce the power output when LED working temperature is too high;
- Lens: 15/25/45 degree, optional.
- Protection rate: IP65
- 3/4/5/8/9 DMX channels options.

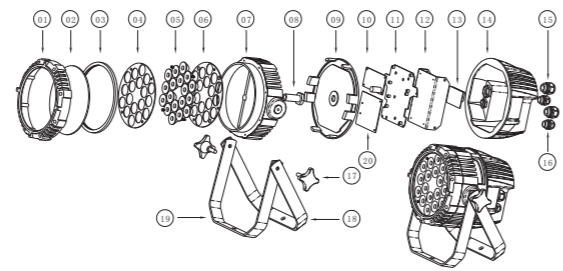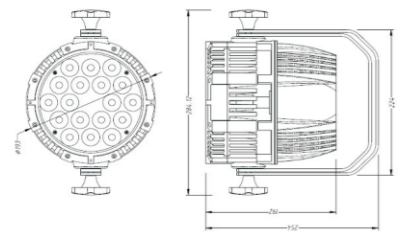

Explosive View