SG HO GREENHOUSE LED GROW LIGHT







Directly replaces 1200W HPS fixtures with a 1:1 footprint, allowing growers to seamlessly upgrade existing HPS installations to LED with 25% energy savings.



Professional grade full-spectrum light formulated to promote healthy full-cycle growth, root development, tight internodal spacing and flower production.



IP66 rated components protect the fixture from dust and water exposure commonly encountered in most CEA applications.



High PBAR Output & Efficacy

Designed for use in commercial greenhouses, CEA environments and hydroponic applications where boosting DLI is critical for target growth requirements.



Easy to use 0-10V dimming compatible with standard horticulture lighting control systems. Group control systems available upon request.

SafeShield Optic & Extra-Long Lifetime


SafeShield proprietary optics create a thermal buffer to protect LED diodes from overheating, guaranteeing a

Active Grow Greenhouse Spectrum Formula

PBAR Range (280-800 nm)

Plant Biologically Active Radiation

UV 280-400 nm	40	Blue 400-500 nm		Green 500-600 nm		Red 600-700 n	Far-Red 700-750 nm			Infrared 750-800 nm	
0%	31%			25%		43%		1%			0%
1.2											
1.0											
_ 0.0		I 🔼		1				- 1			

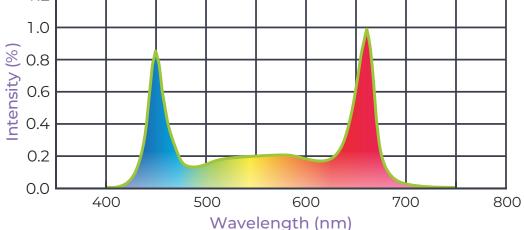

Blue 400-500 nm

Improves overall plant health and quality including taste, aroma, color and nutrition. Helps promote plant compactness and root development.

Green 500-600 nm

Increases overall plant photosynthetic efficiency and penetrates the canopy to encourage growth of lower leaves. Makes detecting issues like pests and disease on plants easier to see.

Red 600-700 nm

Promotes plant photosynthesis and increased biomass. Essential for leaf expansion and stem growth. Helps regulate plant flowering, photoperiod and germination.

Far-Red 700-750 nm

Promotes expansion and stretching of leaves and stems. Penetrates the canopy to encourage growth of lower leaves. When used with 660-680 nm wavelengths, plant photosynthesis rates increase via the Emerson effect.




Product Installation

Product Dimensions



The 1000W SG HO Greenhouse LED Grow Light installs easily into standard ceiling applications using included hanging hooks.

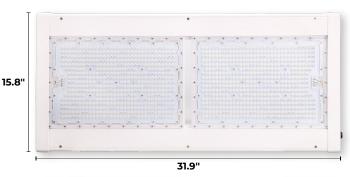

4.3"

SPECIFICATIONS*	1000W SG HO GREENHOUSE LED GROW LIGHT								
Model number	AG/SG1000/HO/GS/277V								
Power	1000 watts								
Input voltage	120-277V 50-60Hz								
Amperage	120V (8.33A) / 208V (4.81A) / 240V (4.17A) / 277V (3.61A)								
Rated power factor	>0.95								
PBAR output (280-800 nm)	2727 µmol/s								
PBAR efficacy (280-800 nm)	2.73 μmol/J								
Spectrum	Greenhouse Spectrum								
CRI	60 (typical)								
Dimensions (l x w x h)	31.9"x15.8"x4.3" (810x401x109mm)								
Weight	44.53 lbs (20.2 kg)								
Dimmable	0-10V								
Daisy chainable power	Yes (MTO)								
Daisy chainable dimming	Yes								
Smart controller compatible	Yes								
IP rating	IP66								
Max ambient temp.	113°F / 45°C								
Heat load	3412 BTU/hr								
THD	<20%								
Lifetime	50,000 hours								
Warranty	5 years								
Certifications	ETL (pending), DLC (pending)								
Included accessories	240V NEMA power cord, 120V plug adapter, 2 hanging hooks, safety wire with clip, waterproof port covers, RJ12 data cable								
Optional accessories	120/277V NEMA power cord, power daisy chain cable, dimming daisy chain cable, 0-10V dimming cable, smart controller								

^{*} Specification data is preliminary and may be subject to change.