

# T5 HO 2.0 4FT 4 LAMP LED GROW LIGHT



25W T5 HO Ballast Bypass  
4FT LED Lamp



## Lightweight & Low Profile

New all-PC body provides growers with a lightweight (5.6 lbs), low-profile (1.7") and high-performance LED fixture with 10% higher PPFD output than previous generation.



## Sun White Pro Spectrum

Professional grade production spectrum formulated to promote healthy vegetative growth, root development, tight internodal spacing and phytochemical production.



## Bypass the Hassle – Line Voltage Lamps

Lamps run directly off line voltage 120-277V. No ballasts means no buzzing, flickering, compatibility or longevity issues, giving your plants pure, uninterrupted lighting.



## Shatterproof Design

Each lamp's transparent PC body protects against water damage and shattering without sacrificing photon output.



## Ready to Grow

Comes complete with 4 LED tubes, 2 hanging hooks and 120V power cord which can also function as a daisy chain cable. Waterproof dual on-off switches let growers run 2 or 4 lamps.



## Extra-Long Lifetime & Guarantee


Active Grow 25W T5 HO Ballast Bypass LED Lamps feature an exceptional 30,000-hour lifetime. Each fixture has a 3-year warranty.

## Active Grow Sun White Pro Spectrum Formula

### PBAR Range (280-800 nm)

Plant Biologically Active Radiation

UV 280-400 nm	Blue 400-500 nm	Green 500-600 nm	Red 600-700 nm	Far-Red 700-750 nm	Infrared 750-800 nm
0%	25%	41%	32%	2%	0%

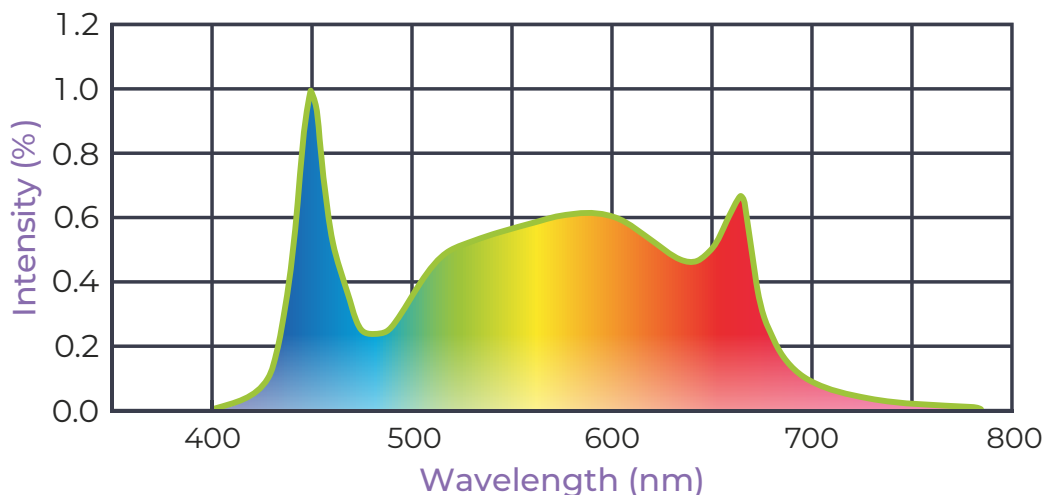

#### Blue 400-500 nm

Improves overall plant health and quality including taste, aroma, color and nutrition. Helps promote plant compactness and root development.

#### Green 500-600 nm

Increases overall plant photosynthetic efficiency and penetrates the canopy to encourage growth of lower leaves. Makes detecting issues like pests and disease on plants easier to see.

#### Red 600-700 nm

Promotes plant photosynthesis and increased biomass. Essential for leaf expansion and stem growth. Helps regulate plant flowering, photoperiod and germination.

#### Far-Red 700-750 nm

Promotes expansion and stretching of leaves and stems. Penetrates the canopy to encourage growth of lower leaves. When used with 660-680 nm wavelengths, plant photosynthesis rates increase via the Emerson effect.


# T5 HO 2.0 4FT 4 LAMP LED GROW LIGHT



## PPFD Coverage (280-800 nm)


### Walden Tent 2'x4'

#### 24" Hanging Height

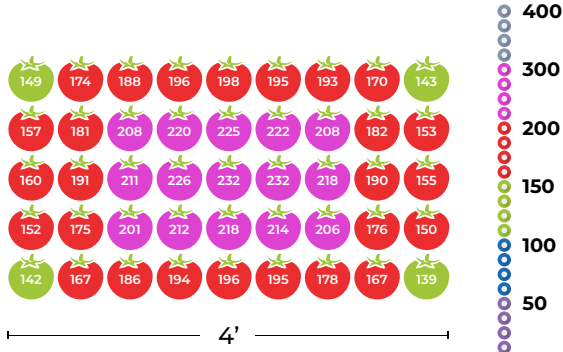

Average: 188  $\mu\text{mol}/\text{m}^2/\text{s}$

#### 12" Hanging Height

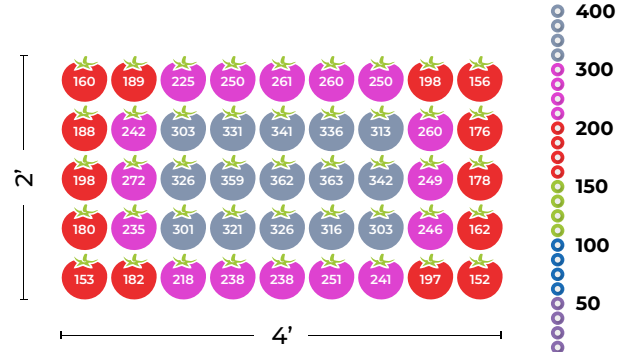

Average: 252  $\mu\text{mol}/\text{m}^2/\text{s}$

PPFD readings were taken in an Active Grow Walden Tent 2'x4' using Active Grow 25W T5 HO Ballast Bypass 4FT LED Grow Lamps in Sun White Spectrum and an Apogee Extended Range PFD Sensor.


### Open Floor 2'x4'

#### 24" Hanging Height



Average: 93  $\mu\text{mol}/\text{m}^2/\text{s}$

#### 12" Hanging Height

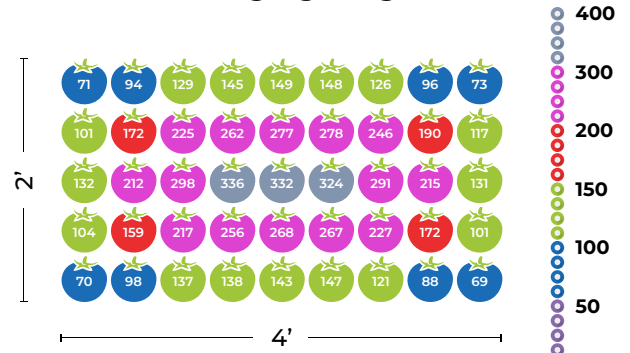

Average: 177  $\mu\text{mol}/\text{m}^2/\text{s}$

PPFD readings were taken using Active Grow 25W T5 HO Ballast Bypass 4FT LED Grow Lamps in Sun White Spectrum and an Apogee Extended Range PFD Sensor. Test results do not include reflective surfaces or adjacent lights.

SPECIFICATIONS	T5 HO 2.0 4FT 4 LAMP LED GROW LIGHT
Model number	AG/T5HO4FIX/4FT/PS
Base	G5
Power	100W (Active Grow 25W T5 HO 4FT LED lamps)
Amperage	0.83A (Active Grow 25W T5 HO 4FT LED lamps)
Input voltage	120-277V 50-60Hz
Spectrum	Sun White Pro Spectrum
CRI	88 (typical)
Dimensions (l x w x h)	46.5"x12.5"x1.7" (1181x318x43mm)
Weight	5.6 lbs (2.5 kg)
Cord length	6' / 183cm
Daisy chain capable	Yes (max 3 fixtures @120V / 4@208V / 5@240V / 6@277V)
Dual on-off switches	Yes
Dimmable	No
Warranty	3 years
Certifications	ETL
Optional accessories	240V plug adapter

\* Savings per fixture based on \$0.12 / kW energy cost and 18 hrs / day lamp usage. 4x58.5W fluorescent lamps with 15,000-hour lifetimes. 4x25W LED lamps with 30,000-hour lifetimes.

**Note:** This fixture is for use with Active Grow T5 HO Ballast Bypass 4FT LED Lamps only. Fluorescent lamps may not be used with this fixture as it does not contain ballasts.