T5 HO BALLAST BYPASS 4FT LED GROW LAMP



-2



Bypass Installation

Installation requires bypassing the existing ballast and rewiring to a single end. Removing the ballast eliminates buzzing, flickering, compatibility and longevity issues.



Energy Saving & Lower Heat

Uses 60% less energy than 54W T5 HO 4FT fluorescent lamps, greatly reducing heat output and the need for more vertical space.

Sun White Spectrum

High CRI 95 full-spectrum light accentuates plant colors, making visual inspection easier. Includes additional Red and Far-Red wavelengths to boost photosynthesis rates.

25W LED

54W FLUORESCENT

High PBAR Output & Efficacy

Ideal for use in commercial or home grow hydroponic applications for full-cycle plant growth of microgreens, leafy greens, flowers, vegetables and medicinal plants.



05

Shatterproof Design

The lamp's transparent PC body protects against water damage and shattering without sacrificing photon output.




Extra-Long Lifetime & Guarantee

Features an exceptional 30,000-hour lifetime and a 3-year warranty.

Active Grow Sun White Spectrum Formula

PBAR Range (280-800 nm)

Plant Biologically Active Radiation

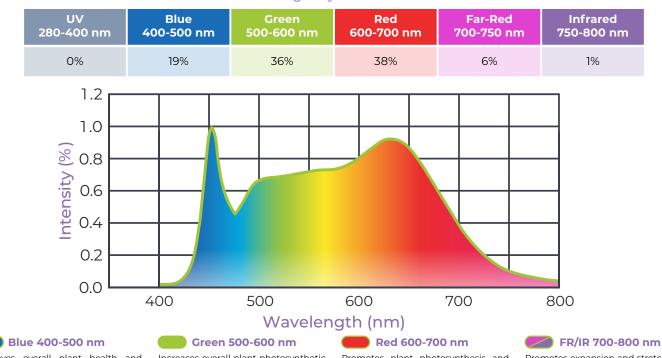

Improves overall plant health and quality including taste, aroma, color and nutrition. Helps promote plant compactness and root development. Increases overall plant photosynthetic efficiency and penetrates the canopy to encourage growth of lower leaves. Makes detecting issues like pests and disease on plants easier to see.

Promotes plant photosynthesis and increased biomass. Essential for leaf expansion and stem growth. Helps regulate plant flowering, photoperiod and germination.

Promotes expansion and stretching of leaves and stems. Penetrates the canopy to encourage growth of lower leaves. When used with 660-680 nm wavelengths, plant photosynthesis rates increase via the Emerson effect.

ACTIVE GROW

T5 HO BALLAST BYPASS 4FT LED GROW LAMP



SPECIFICATIONS*	T5 HO BALLAST BYPASS 4FT LED GROW LAMP
Model number	AG/25T5HOBB/4FT/WS
Base	G5
Power	25 watts
Input voltage	120-277V 50-60Hz
Rated power factor	>95%
PPF output (400-700 nm)	53 μmol/s
PBAR output (280-800 nm)	57 μmol/s
PPF efficacy	2.12 μmol/J
PBAR efficacy	2.28 µmol/J
Spectrum	Sun White Spectrum
CRI	95 (typical)
Dimensions	45.63"x0.75"x0.75" (1159x19x19mm)
Weight	0.4 lbs (181 g)
Dimmable	No
Lifetime	30,000 hours
Warranty	3 years

* T5 fixture requires non-shunted lamp holders (tombstones).

