


1. Photos: *Please provide photo(s) of actual doors that will be wrapped (*as shown below*). These should have as least amount of distortion in the photo as possible. The more distorted the image is the more measurements we may need. This is used for proofing taking into account handles, hinges, widnows and other obstructions that may affect layout. Sizing is also very important in making sure the final prints fit the doors as proofed.




- Perfect angle
- No distortion
- Entire door is in photo
- Great resource for design



- Bad angle
- Too much Distortion
- Entire door is not in photo
- Limited resource for design

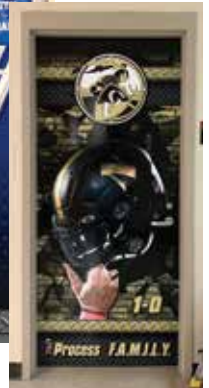

2. Measurements: *This step is crucial to making sure design, proofing, sizing, printing and referencing to installers is all correct. **Please double check for accuracy before submitting. Use same format for single or double doors (as applies). Please supply as many photos and measurements as there are for each door being wrapped.

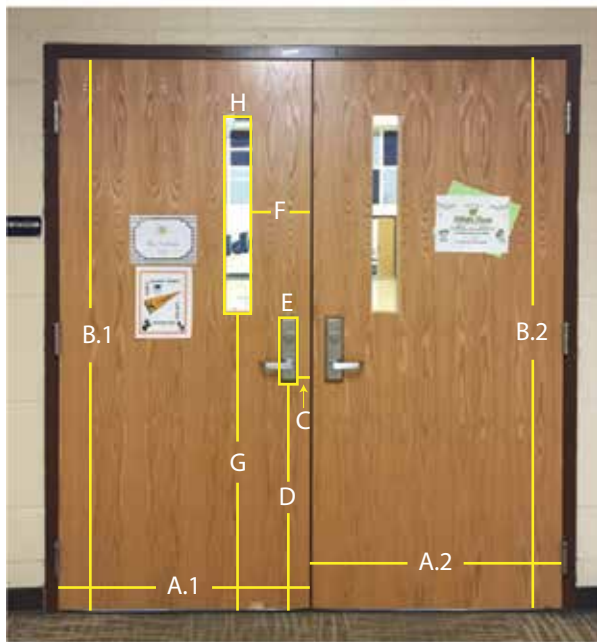

a.

A.1	
B.1	
A.2	
B.2	

We use a 3M Wrap Vinyl with bubble free installation and a versatile film. Will adhere to finished wood doors, steel doors, and more, *painted or unpainted.*

**Painted doors should not have failing paint, chips or flacking. Please allow 2 weeks or more for freshly painted surfaces.*

b.

C		
D		
E	L.	H.
F		
G		
H	L.	H.

Multiple Doors **Will the doors have the same design?** **Yes** **No**

Other Details: *We use a 3M Wrap Vinyl that offers a bubble free installation. Any small bubble during installation can, simply be smoothed out with your finger or a squeegee. It's a quality film and pressure activated. The first step (cleaning) is the most important part of the process for a good long term tac. We recommend applying a 3M edge seal along the edge

Installation: **DIY Installation** **Professional Installation**