


NOTES:

1. ASSEMBLE PC 317 INLET RING OVER PC 318 SCREEN AND SECURE WITH PC 324 SCREWS.
2. 4 PER CONTAINER, 64 MAX PER PALLET, PACKING ASSY. 8785-4715 PER P.S. 8883-4408 AND P.S. 8883-4200
3. PALLET MUST BE Banded (4) PLACES AND THEN STRETCH WRAPPED.

APPLICATION											
THERMALLY PROTECTED CLASS "B" INSULATION											
B	LA	FR	A	S	C	E	B	A			
03	73	30	V	06	JN	5	3	6			
CUSTOMER FASCO AUSTRALIA											
CUSTOMER PART NO. 5-2810-681-004											

LEAD MATERIAL
 18 GA. 105°C 2/64 INSUL.
 SJT. 3 COND. BLACK JACKET
 BLUE, BROWN, GRN/YEL
 28.50/26.50 IN. LONG

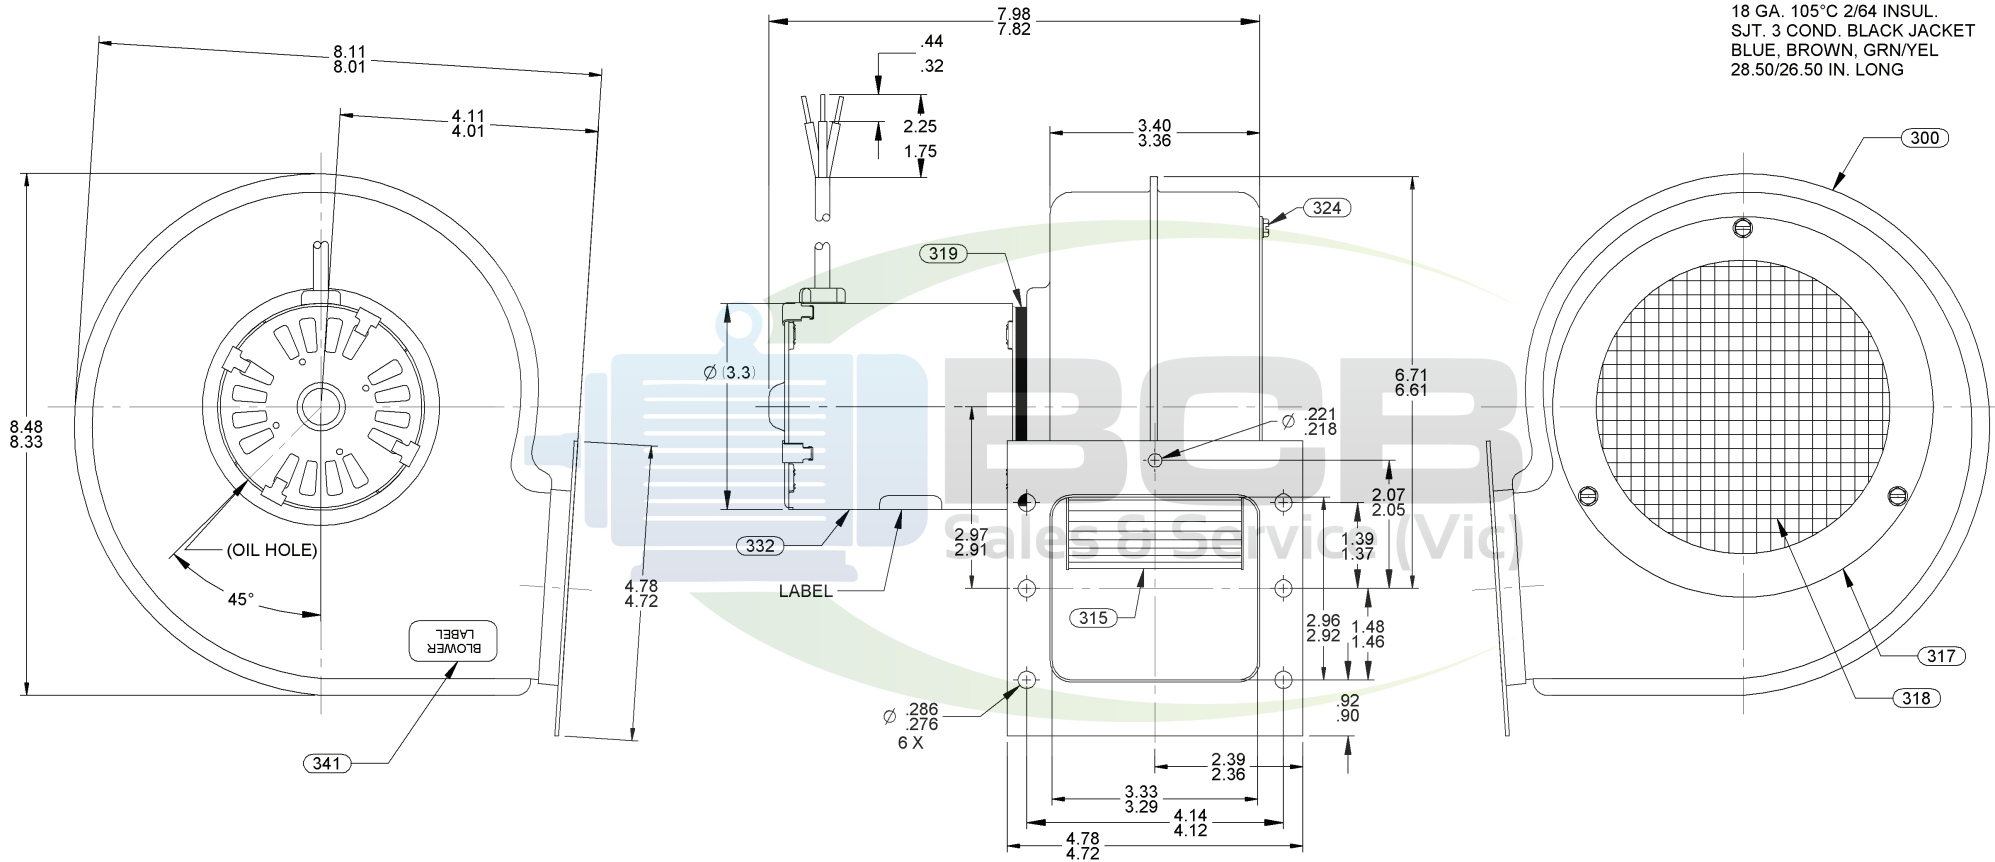

TYPICAL PERFORMANCE TEST DATA
 IN FREE AIR

ECC. NO.	REV.	DATE	APPROVAL
C440109	04	9-9-10	SED/RPT

AT	240	VOLTS	50	HZ.
	R.P.M.	WATTS	AMPS	
	1409	64	.43	
BLOWER WEIGHT			END PLAY	
6 1/4 LBS.			.050/.010	

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:	
FRACTIONS ± 1/16	DECIMALS XX ± .01 XXX ± .005
ANGLES ± 1°	
APPROVALS	DATE
DRAWN SSJ	4-7-2003
CHECKED ATM	4-7-2003
FINISH COLOR	BLACK

FASCO FASCO MOTORS GROUP AC MOTOR/BLOWER DIVISION	
CONFIDENTIAL: DO NOT DUPLICATE OR DISCLOSE TO THIRD PARTIES WITHOUT WRITTEN PERMISSION OF FASCO MOTORS GROUP, AC MOTOR/BLOWER DIVISION.	
TITLE BLOWER ASSEMBLY	
SIZE B	DWG. NO. 7073 0356
DO NOT SCALE DRAWING	SHEET 1 OF 1
	REV. 04

If Printed, this is an Uncontrolled Document