


NOTES:

1. TRAP PC 318 SCREEN BETWEEN HOUSING AND PC 317 INLET RING. SECURE INLET RING WITH PC 324 SCREWS.
2. 6 PER TRAY, 60 MAX. AMT. PER PALLET, PACKING ASSY: 87854691, P.S. 88834200 AND 88834408.
3. PALLET MUST BE Banded (4) PLACES AND THEN STRETCH WRAPPED.

APPLICATION	B	LA	FR	A	S	C	E	B	A
THERMALLY PROTECTED CLASS "B" INSULATION	18	73	30	V	06	DR	5	3	6
CUSTOMER	FASCO AUSTRALIA								
CUSTOMER PART NO.	5-2810-681-005								

LEAD MATERIAL
 18 GA. 105°C 2/64 INSUL.
 THERMO SJT 3 COND.
 BRN, BLU, GRN/YEL.
 28.50/26.50 IN. LONG
 2.25/1.75 IN. RIP
 .68/.56 IN. STRIP

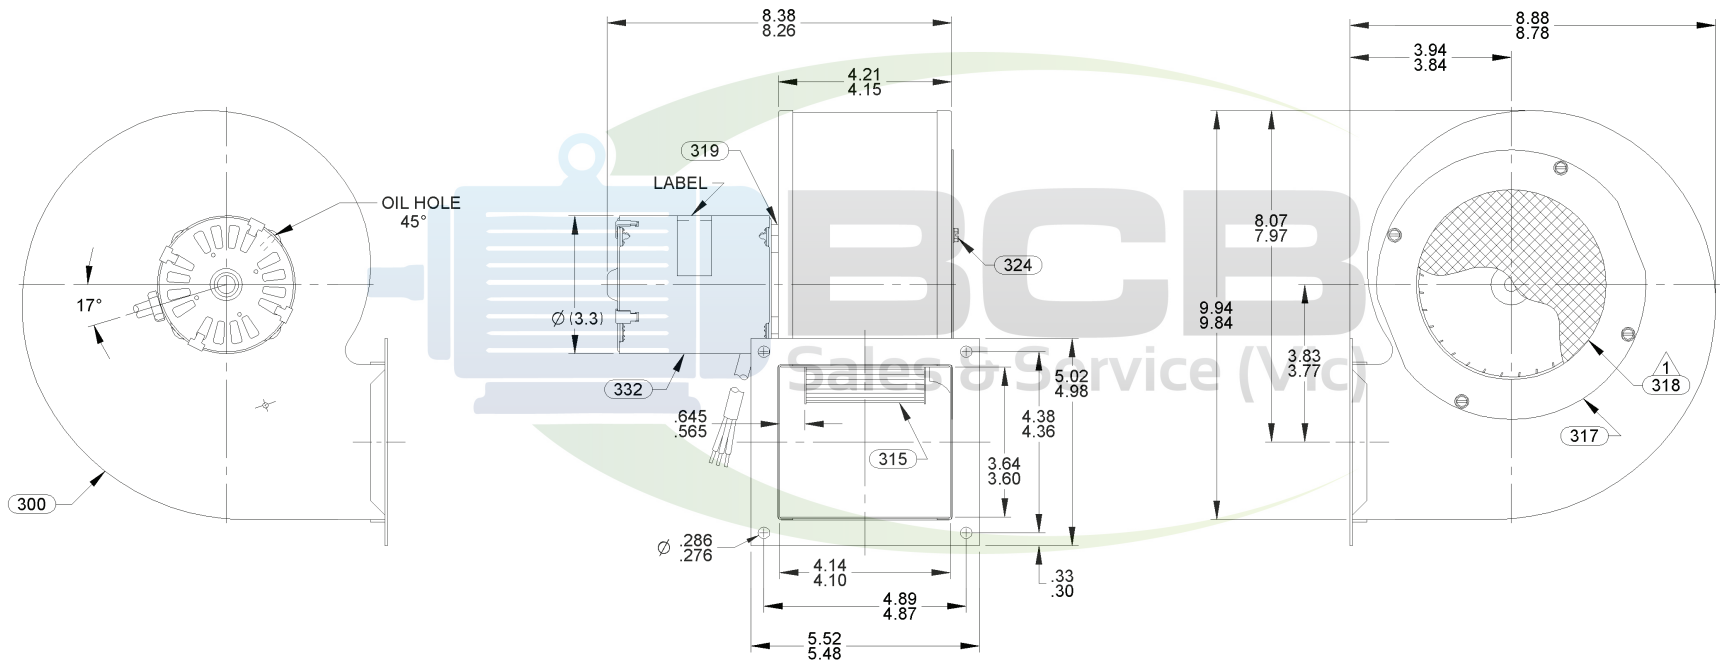

TYPICAL PERFORMANCE TEST DATA IN FREE AIR
 AT 240 VOLTS 50 HZ.
 UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:
 FRACTIONS ± 1/16 DECIMALS .XX ± .01 ANGLES ± 1°
 XXX ± .005

ECO. NO.	REV.	DATE	APPROVAL
4003601	06	11/01/2011	SDM/MLM
4010281	07	9/11/2013	MLS/PLA

R.P.M.	WATTS	AMPS
1410	105	.83

APPROVALS	DATE
DRAWN VLL	03/23/2004
CHECKED ATM	03/23/2004

FASCO FASCO MOTORS GROUP
 AC MOTOR/BLOWER DIVISION

CONFIDENTIAL - DO NOT DUPLICATE OR DISCLOSE TO THIRD PARTIES WITHOUT WRITTEN PERMISSION OF FASCO MOTORS GROUP, AC MOTOR/BLOWER DIVISION.

TITLE **BLOWER ASSEMBLY**

SIZE **B** DWG. NO. 7073 0355 REV. 07

DO NOT SCALE DRAWING SHEET 1 OF 1

BLOWER WEIGHT 7.0 LBS.

END PLAY .050/.010

FINISH COLOR BLACK

If Printed, this is an Uncontrolled Document.