



3RD ANGLE PROJECTION



MOTOR SPECIFICATION

MOTOR No.	BCB No.	500522-71C	
	CUSTOMER	VARIOUS	
S.R. No.	6780	CAPACITOR	uf/V
POWER OUTPUT	23.0 W	START	NIL
MOTOR TYPE	SHADED POLE	RUN	NIL
SUPPLY	VOLTS	HERTZ	PHASE
	240	50	SINGLE
ENCLOSURE	VENTED ENDSHIELDS		
SPEED	1300	RPM. AT RATED OUTPUT	
ROTATION	CLOCKWISE (DRIVE END)		
INSULATION CLASS	E120	DUTY	A.O.M.
THERMAL PROTECTION	AUTO RESET OVERLOAD		
SUPPLY CURRENT	0.45	AMPS AT RATED OUTPUT	
APPLICATION	VARIOUS		
MOUNTING	TAPPED HOLES IN ENDSHIELDS		
BEARING & LUBRICATION	BALL & WIDE RANGE GREASE		
SUPPLY LEAD	COLOUR	GREY	
	LENGTH	750.0 (45.0 STRIPPED)	
	TERMINATION	BOOTLACES	
	FIXING	NIL	
EARTH PROVISION	VIA SUPPLY LEAD		
BASIC BUILD SPECIFICATION	_____		
PERFORMANCE SPECIFICATION	_____		
MOUNTING SPECIFICATION	_____		
FINISHING DIAGRAM	_____	PAINT SPEC.	NIL

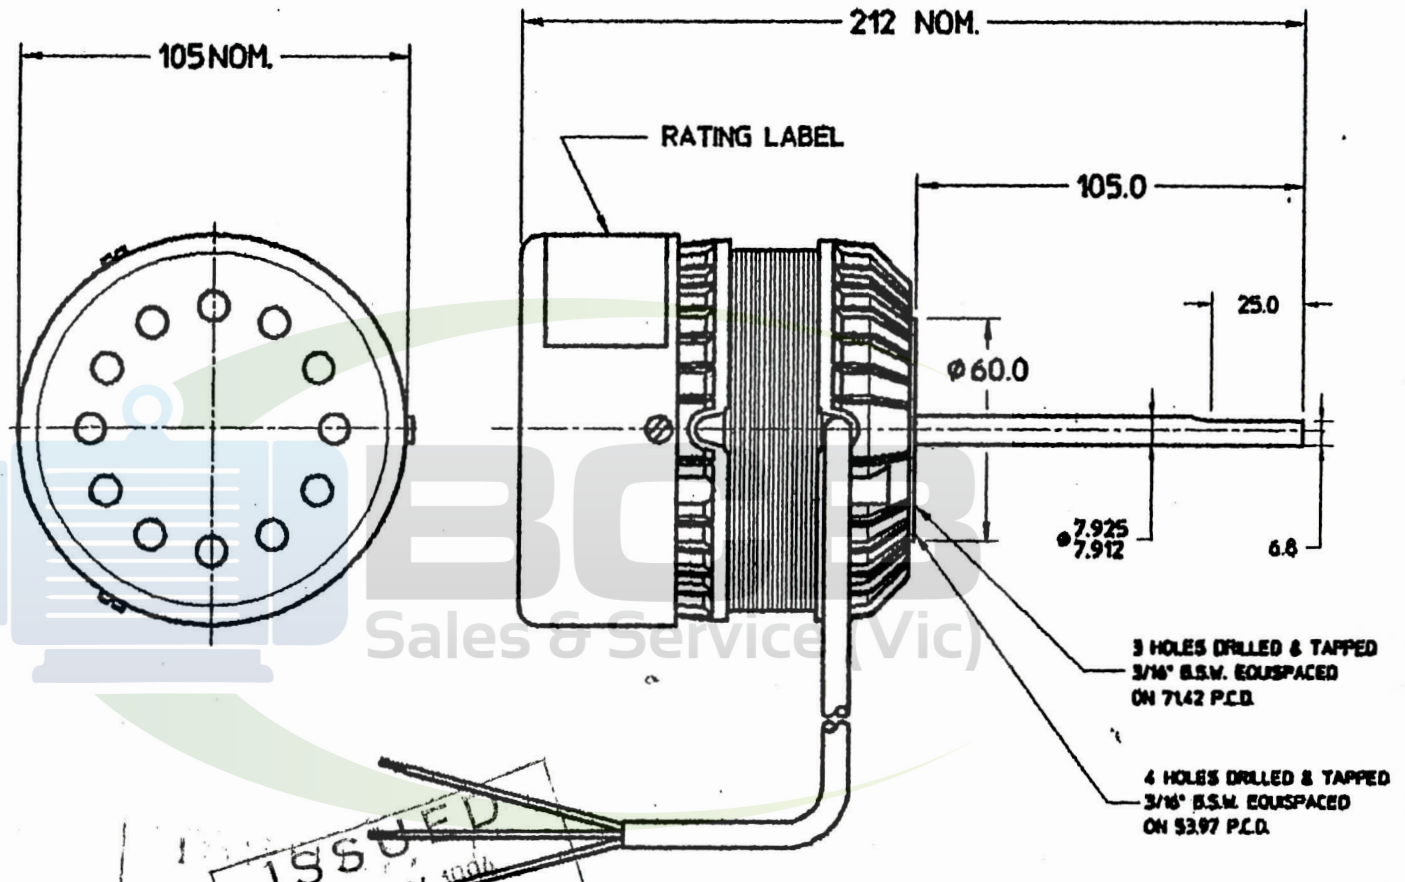

ISSUED
 24 MAY 1994
 DESTROY ALL COPIES, BEARING
 PROPER PERMITS

CONTROLLED COPY



SPECIAL REQUIREMENTS
 1) VENTED ENDSHIELDS BOTH ENDS

UNLESS OTHERWISE SPECIFIED
 DIMENSIONS IN MILLIMETRES
 GENERAL TOLERANCES
 1 PLACE OF DECIMALS ± 0.3
 2 PLACES OF DECIMALS ± 0.1
 ANGLES ± 30 MINUTES
 SURFACE FINISHES SPECIFIED IN
 MICRO METRES, MAX 30
 SYMBOLS -A3100
 THIS DRAWING REMAINS THE PROPERTY OF
 BROOK CROMPTON BETTS PTY. LIMITED
 MAY NOT BE USED, COPIED OR ISSUED
 WITHOUT WRITTEN PERMISSION

	BY	DATE
DRAWN	AB	15.09.93
CHECKED	SW	13.10.93
RELEASED	SW	15.10.93
SCALE		



FRAME	63	MOTOR D SERIES
DRG No	500522-71C	REVISION
A3		A

DO NOT SCALE DRAWING

ACN 000 010 944