

FASCO MOTORS MAY PROVIDE TECHNICAL ASSISTANCE TO OUR CUSTOMERS IN MANY AREAS. HOWEVER, SINCE FASCO MOTOR IS NOT AWARE OF ALL DATA CONCERNING THE USE AND APPLICATION OF THIS MOTOR, THE FITNESS OF THE MOTOR FOR THE APPLICATION MUST BE DETERMINED BY AND IS THE RESPONSIBILITY OF THE CUSTOMER.




MOTOR SPECIFICATION

80855BPVA-A12

Q.R.No.	8227	CUSTOMER NO.	-
CUSTOMER	ERVIS AUST		
MOTOR RATING	VOLTS	240	Hz 50 Ph 1 Duty ACM
	R.P.M.	1340	4.3 AMPS
NOM. OUTPUT	650 WATTS		
ROTATION	CLOCKWISE AT DRIVE END		
CAPACITOR	START	—	μF/V RUN 25/400 μF/V
ENCLOSURE	VENTED		
MOTOR TYPE	CSR	INSULATION CLASS	B130
THERMAL PROTECTION	AUTO RESET OVERLOAD		
APPLICATION	FAN - SHAFT HORIZONTAL		
BEARING D.E.	6202 DDU	LUBRICATION	LONG LIFE, WIDE RANGE
BEARING N.D.E.	6202 DDU		
SUPPLY LEAD	SINGLE CORE 800 ±30 BRAIDED SLEEVING		
EARTH PROVISION	VIA SUPPLIED LEAD		
BASIC BUILD SPECIFICATION	305-670-02	PAINT/ COLOUR	PC GREY CASE PLAIN E/SHIELDS
PERFORMANCE SPECIFICATION	SP65190-02		
CONNECTION DIAGRAM	393-402-04	RATING LABEL	563-03.FMT

FINAL INSPECTED MOTORS MUST COMPLY WITH ELECTRIC MOTOR VIBRATION SPECIFICATION (E50#19)

THIRD ANGLE PROJECTION

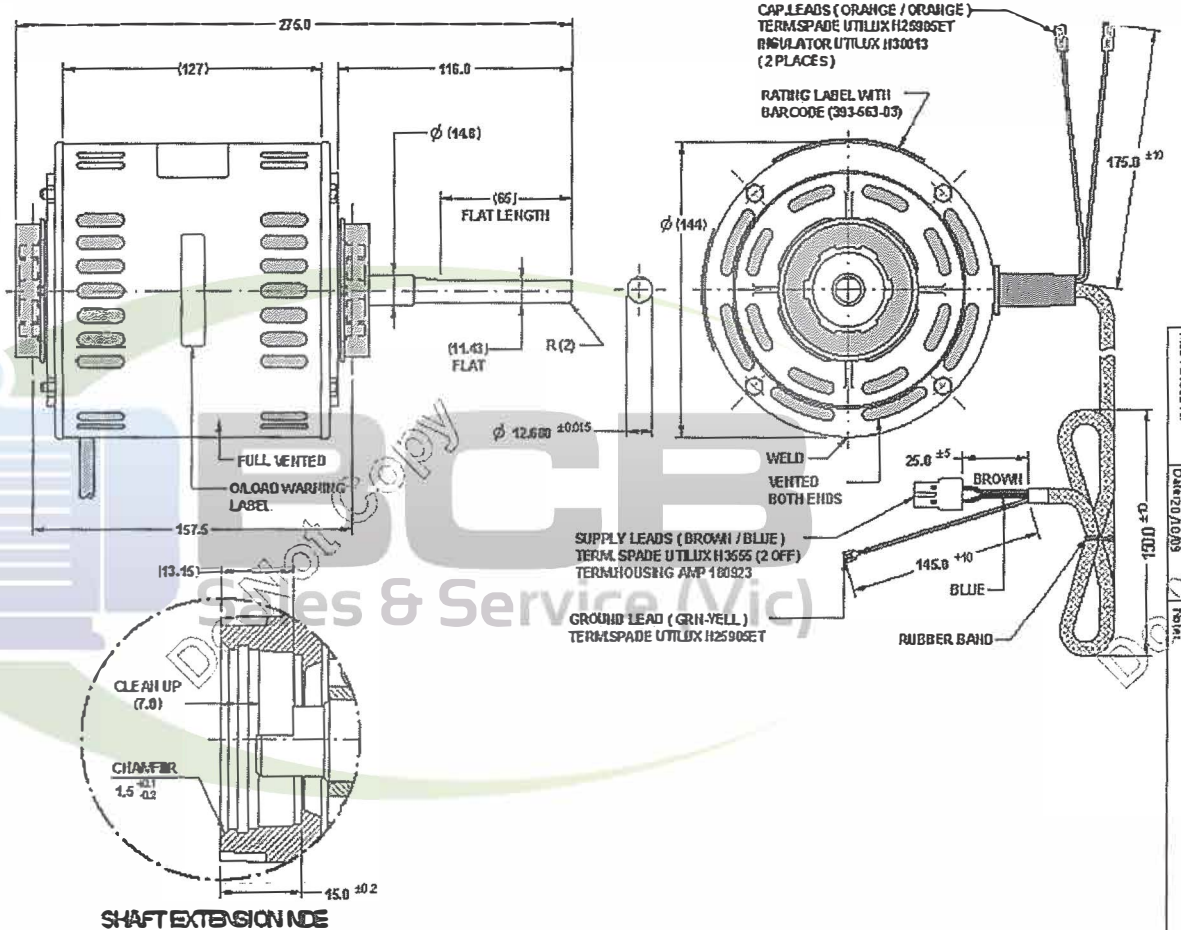

600W HEATER 15972

MODEL 80855BPVA-A12

FASCO S/N

VOLTS 240 R.P.M. 1340 CLASS B130 Hz 50
WATTS 650 TYPE CSR μF/V NL Ph 1
AMPS 4.3 DUTY ACM μF/V R 25/400 PROT. AUTO

SPECIAL REQUIREMENTS

- CAPACITOR SUPPLIED BY CUSTOMER.
- CAPACITOR LEADS TO BE LEFT FREE. I.E. NOT TWISTED, KNOTTED, WOUND ETC.
- SUPPLY LEADS TO BE "HANKED" AND HELD WITH A RUBBER BAND.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MM TOLERANCES

DECIMALS	ANGULAR
X ± 1.0	± 30'
XX ± 0.1	

MOTOR WEIGHT

DRAWN	
CHECKED	
RELEASED	
SCALE	

THIS DRAWING REMAINS THE PROPERTY OF FASCO AND IS NOT TO BE REPRODUCED OR COPIED WITHOUT WRITTEN PERMISSION FROM FASCO AUSTRALIA

BCB SALES & SERVICE
PH : 03 9546 3833
FAX : 03 9546 3356

FRAME	MOTOR
STATUS	B 190:855B V-650-K AD:BRIVS
R	
SHEET	DWG. NO.
A3	80855BPVA-A12