


FASCO MOTORS MAY PROVIDE TECHNICAL ASSISTANCE TO OUR CUSTOMERS IN MANY AREAS. HOWEVER, SINCE FASCO MOTOR IS UNWARE OF ALL DATA CONCERNING THE USE AND APPLICATION OF THIS MOTOR, THE FITNESS OF THE MOTOR FOR THE APPLICATION MUST BE DETERMINED BY AND IS THE RESPONSIBILITY OF THE CUSTOMER.




THIRD ANGLE PROJECTION

MOTOR SPECIFICATION

80855BQVA-A14

Q.R. No.	8093	CUSTOMER NO.	-
CUSTOMER	BRIVIS AUST.		
MOTOR RATING	VOLTS	240	Hz 50 Ph 1 Duty S1/AOM
	RPM.	1350	4.9 AMPS
	NOM. OUTPUT	750 WATTS	
ROTATION	ANTI CLOCK WISE AT DRIVE END		
CAPACITOR	START	-----	μF/V RUN 25/400 μF/V
ENCLOSURE	FULLY VENTED		
MOTOR TYPE	CSR	INSULATION CLASS	B130
THERMAL PROTECTION	AUTO RESET OVERLOAD		
APPLICATION	BLOWER		
BEARING D.E.	6202 DDU.	LUBRICATION	LONG LIFE, WIDE RANGE
BEARING N.D.E.	6202 DDU.		
SUPPLY LEAD	FLEX 1100 ±30 GREY		
EARTH PROVISION	VIA SUPPLY LEAD		
BASIC BUILD SPECIFICATION	305-570-07	PAINT/ COLOUR	NIL. (PRIMER)
PERFORMANCE SPECIFICATION	SP85178-03		
CONNECTION DIAGRAM	393-531-01	RATING LABEL	563-05.FMT

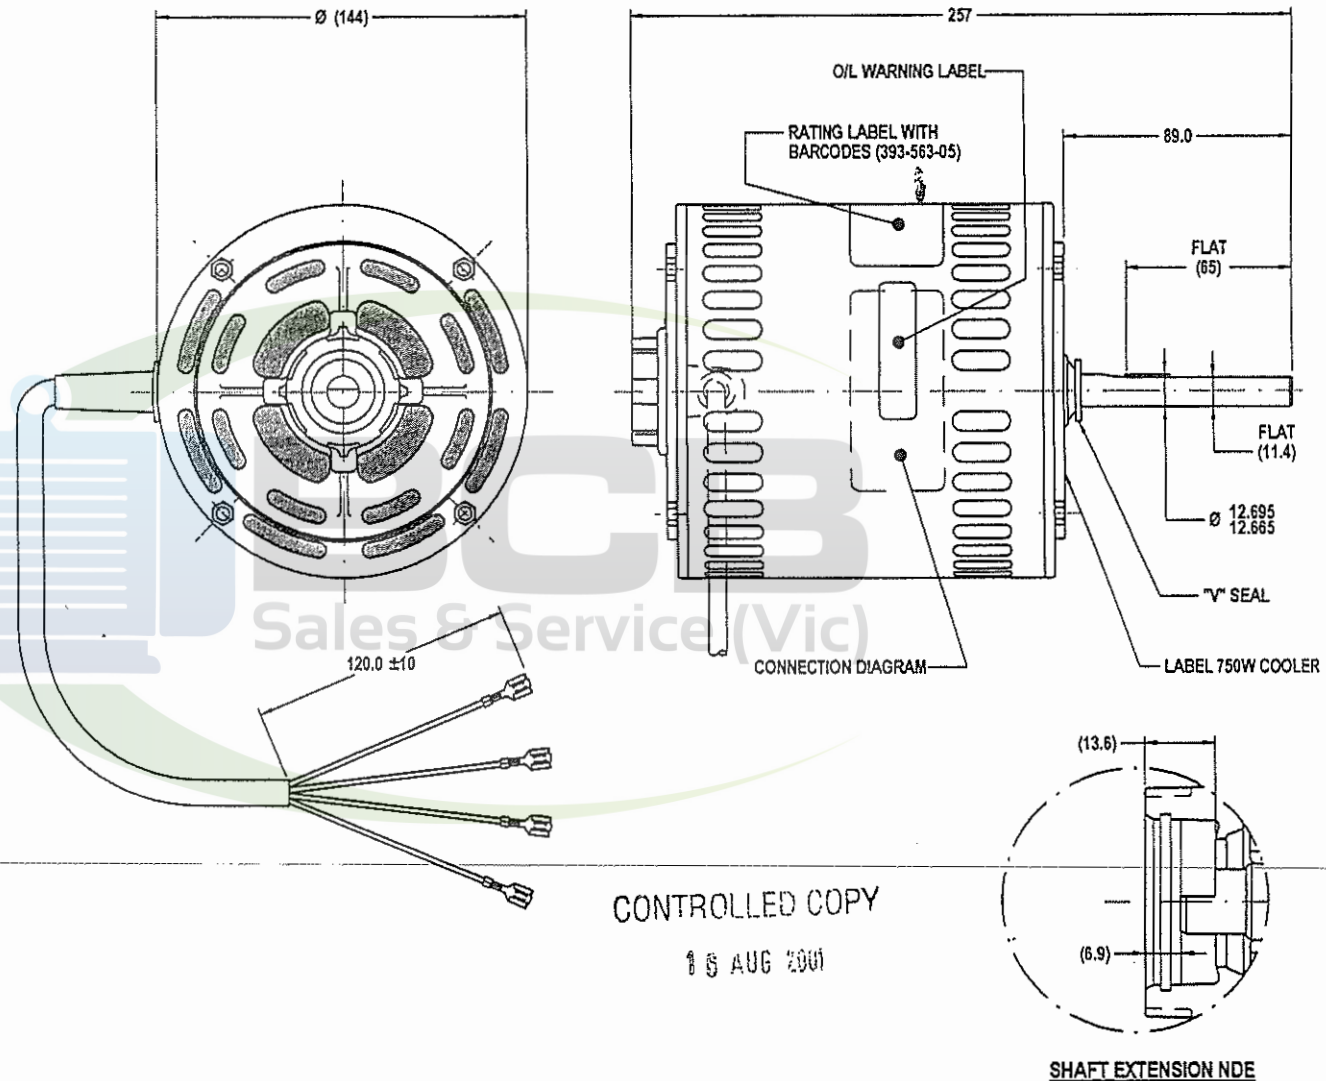

750W COOLER 14991 N693

FASCO MODEL 80855BQVA-A14 FASCO SIN

dd/mm/yyyyxxx

VOLTS 240	R.P.M. 1350	CLASS B130	Hz 50
WATTS 750	TYPE CSR	μF/V S NIL	Ph 1
AMPS 4.9	DUTY ADM	μF/V R 25/400	PROT.AUTO

87.0

CONTROLLED COPY
18 AUG 2001

SPECIAL REQUIREMENTS:

- 1)_CAPACITOR TO BE SUPPLIED BY CUSTOMER.
- 2)_MOTOR TO BE MOUNTED SHAFT UP WITH ABUTMENT WASHER IN THE LEAD END.
- 3)_COOLER LABEL 393-529-01 TO BE ON D.E. ENDSHIELD.

UNLESS OTHERWISE SPECIFIED : DIMENSIONS ARE IN MM. TOLERANCES

DECIMALS	ANGULAR
.X ± 1.0	± 30'
.XX ± 0.5	

THIS DRAWING REMAINS THE PROPERTY OF FASCO MOTORS AND MAY NOT BE USED, COPIED OR ISSUED WITHOUT WRITTEN PERMISSION FROM FASCO MOTORS

BCB SALES & SERVICE

PH : 03 9546 3833
FAX : 03 9546 3356

MATL & FINISH	
DRAWN	SYDNI
CHECKED	KITT
RELEASED	KITTI
SCALE	

NONHABURI 11000 THAILAND

FRAME	MOTOR
STATUS	178:855BV-750-XBD:BRIVIS
SHEET	DWG. NO. 80855BQVA-A14
A3	REVISION 0

MIC No. 003766
By: ORAN
Date: 26/08/01
MIC ADD NAME PLATE AND UPDATE ENDSHIELDS.