


MOTOR SPECIFICATION

80855BQVA-A27

Q.R. No.	Y004122	CUSTOMER NO.	B023354
CUSTOMER	RINNAI		
MOTOR RATING	VOLTS	240	Hz 50 Ph 1 Duty S1 AOM.
	RPM.	1350	4.9 AMPS
	NOM. OUTPUT	750 WATTS	
ROTATION	ANTI CLOCKWISE DRIVE END		
CAPACITOR	START	-----	μF/V RUN 25/400 μF/V
ENCLOSURE	FULLY VENTED		
MOTOR TYPE	CSR	INSULATION CLASS	B130
THERMAL PROTECTION	THERMAL FUSE CUT-OFF 152 °C		
APPLICATION	EVAP.COOL - SHAFT VERTICAL UP		
BEARING D.E.	6202 DDU	LUBRICATION	LONG LIFE, WIDE RANGE
BEARING N.D.E.	6202 DDU		
SUPPLY LEAD	FLEX 700 ± 30 GREY		
EARTH PROVISION	VIA SUPPLY LEAD		
BASIC BUILD SPECIFICATION	305-570-16	PAINT/ COLOUR	PC GREY CASE PLAIN E/SHIELDS
PERFORMANCE SPECIFICATION	SP85178-03		
CONNECTION DIAGRAM	393-531-01	RATING LABEL	AS SHOWN

FINAL INSPECTED MOTORS MUST COMPLY WITH ELECTRIC MOTOR VIBRATION SPECIFICATION (ES049)

THIRD ANGLE PROJECTION.

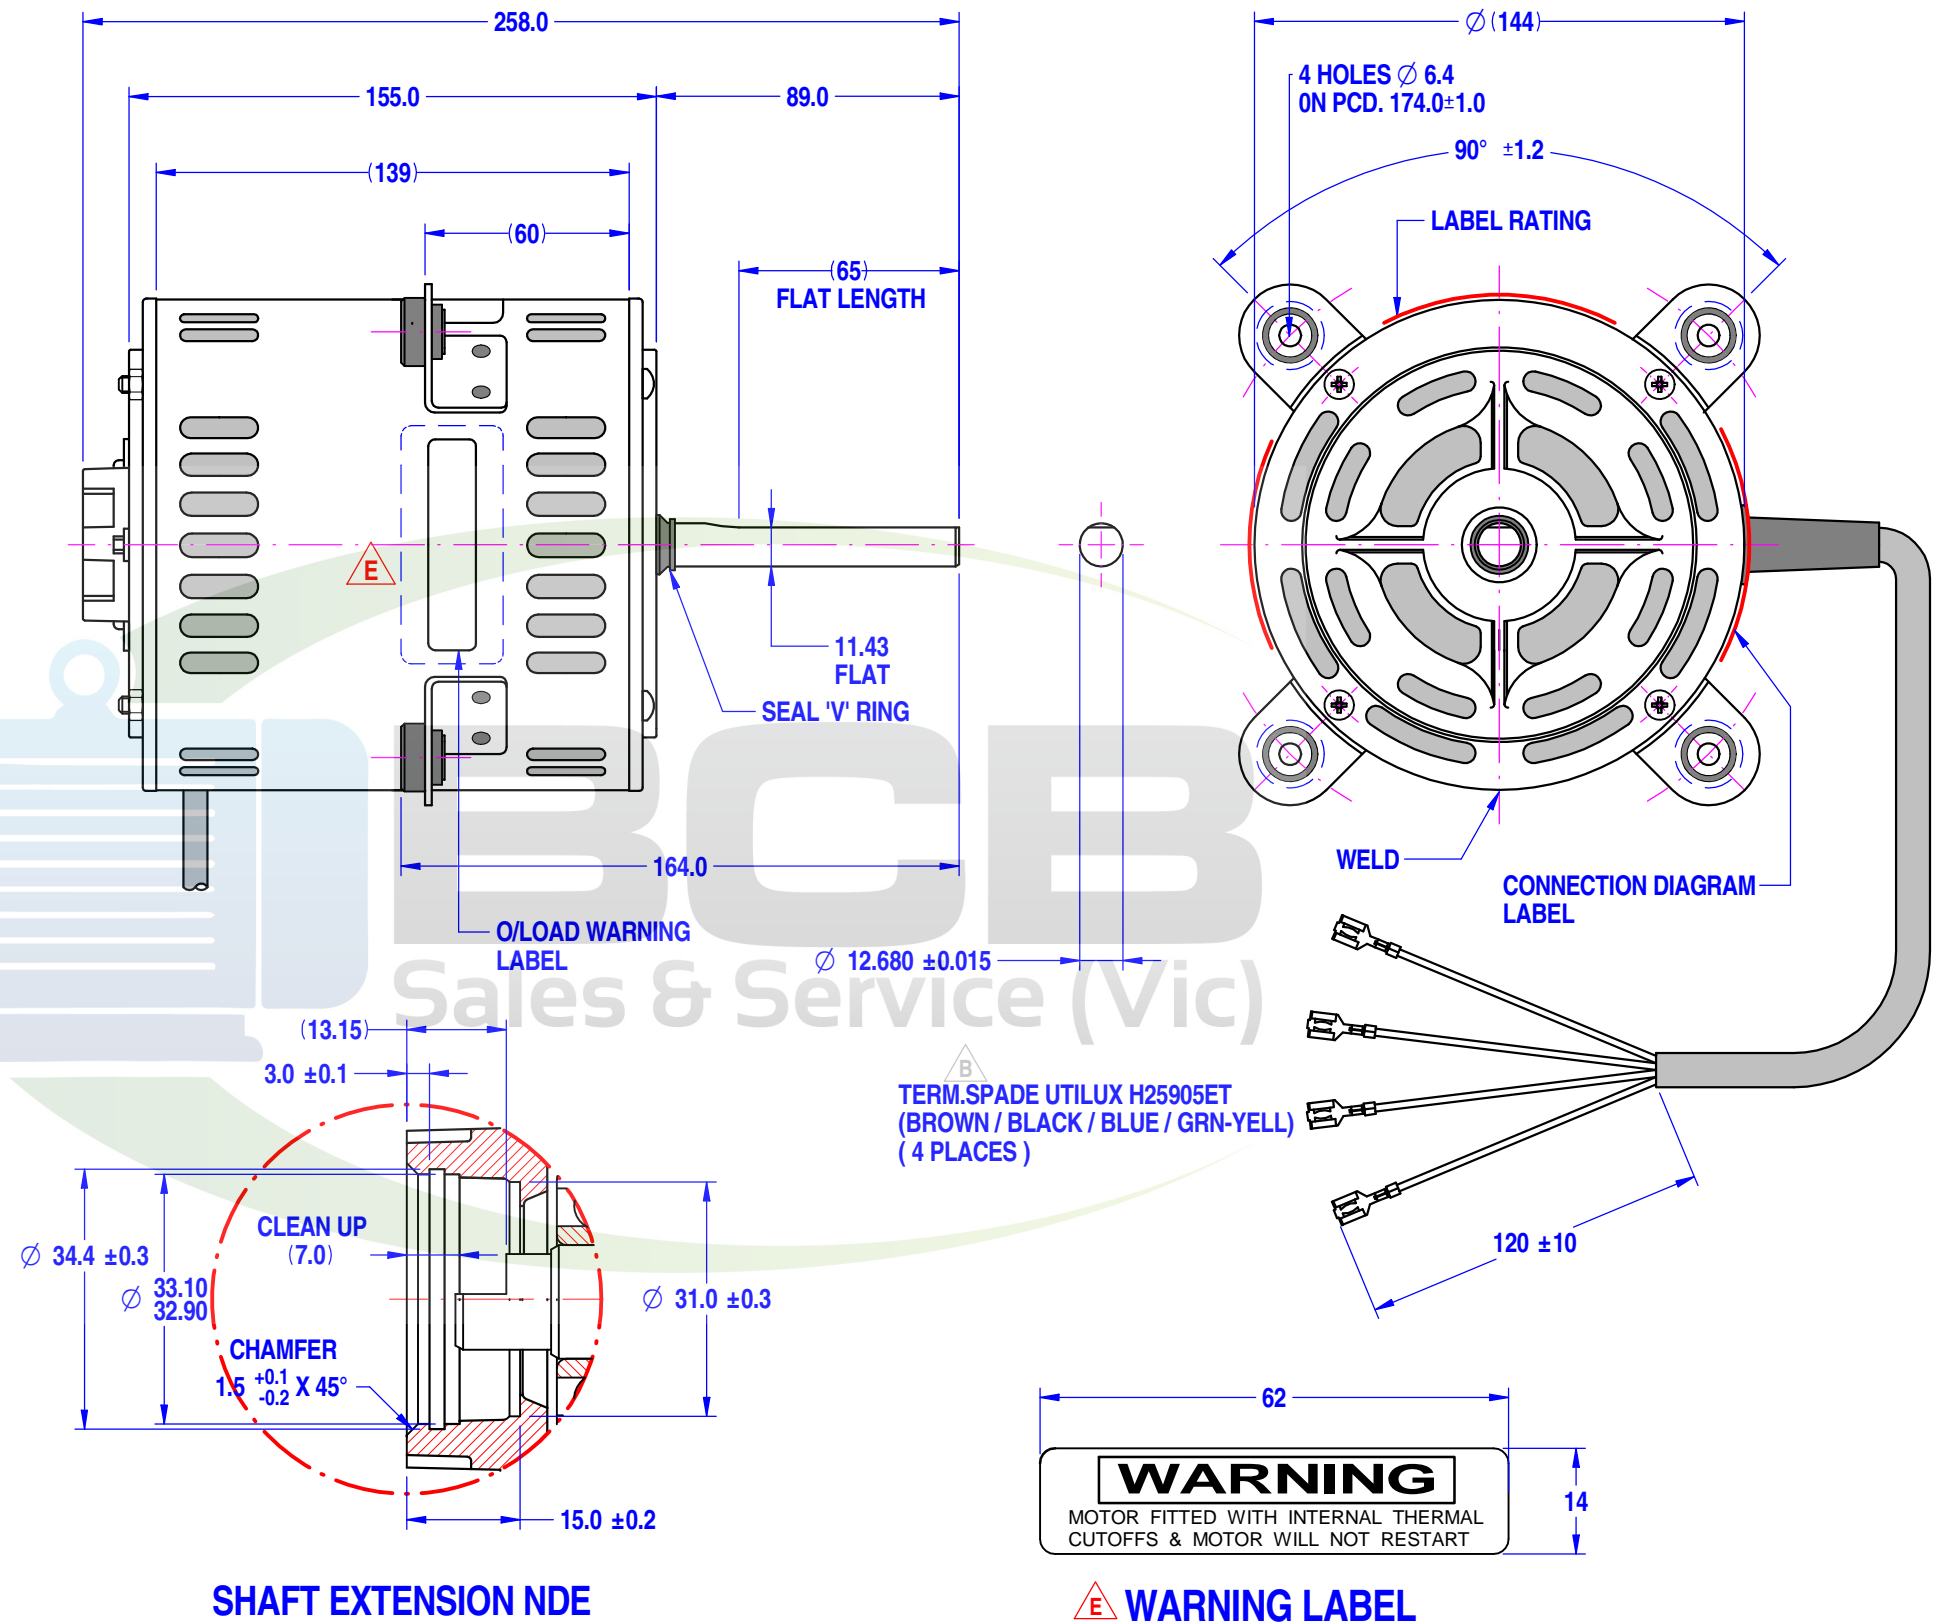

750W COOLER B023354

MODEL 80855BQVA-A27

FASCO S/N ddmmyxxxx

VOLTS 240	R.P.M. 1350	CLASS B130	Hz 50
WATTS 750	TYPE CSR	μF/V S NIL	Ph 1
AMPS 4.9	DUTY S1/AOM	μF/V R 25/400	PROT.FUSE

- SPECIAL REQUIREMENTS:**
- 1)_CAPACITOR SUPPLIED BY CUSTOMER.
 - 2)_MOTOR TO BE MOUNTED SHAFT UP WITH ABUTMENT WASHER IN THE LEAD END.
 - 3)_BIND LEAD ASSEMBLY AROUND CASE MOTOR.

UNLESS OTHERWISE SPECIFIED : DIMENSIONS ARE IN MM. TOLERANCES		
DECIMALS	ANGULAR	
.X ± 1.0	± 30'	
.XX ± 0.1		
THIS DRAWING REMAINS THE PROPERTY OF FASCO MOTORS AND MAY NOT BE USED, COPIED OR ISSUED WITHOUT WRITTEN PERMISSION FROM FASCO MOTORS		
MOTOR WEIGHT	9.5 kg.	
DRAWN	Pipat	08/05/2010
CHECKED	Pipat	11/05/2018
RELEASED	Suksakorn	11/05/2018
SCALE	N.T.S.	

FASCO THAILAND

29/7-8 MOO 3, BANGKRUAY - SAINOI Rd., BANGKRANG, MUANG NONTABURI DISTRICT, NONTABURI 11000 THAILAND

FRAME	MOTOR	
STATUS	R	
SHEET	B178:855BV-750-HBD:BRIVS	
A3	DWG. NO.	80855BQVA-A27
	REVISION	E

MIC1802049 By: Veeranut Date: 11/05/2018 MIC E: CHANGE OVERLOAD TO THERMAL FUSE AND CHANGE WARNING LABEL AND RATING LABEL