

FASCO MOTORS MAY PROVIDE TECHNICAL ASSISTANCE TO OUR CUSTOMERS IN MANY AREAS. HOWEVER, SINCE FASCO MOTOR IS NOT AWARE OF ALL DATA CONCERNING THE USE AND APPLICATION OF THIS MOTOR, THE FITNESS OF THE MOTOR FOR THE APPLICATION MUST BE DETERMINED BY AND IS THE RESPONSIBILITY OF THE CUSTOMER.




THIRD ANGLE PROJECTION

MOTOR SPECIFICATION

809436NTB-B11

Q.R. No.	8047	CUSTOMER NO.	-
CUSTOMER	LOVELOCK LUKE		
MOTOR RATING	VOLTS	415	Hz 50 Ph 3 Duty A.O.M.
	RPM.	940	1.1 AMPS
	NOM. OUTPUT	375 WATTS	
ROTATION	CLOCK WISE AT DRIVE END (REVERSIBLE)		
CAPACITOR	START	----- $\mu F/V$	RUN ----- $\mu F/V$
ENCLOSURE	TOTALLY ENCLOSED		
MOTOR TYPE	3 PHASE	INSULATION CLASS	B130
THERMAL PROTECTION	AUTO RESET OVERLOAD		
APPLICATION	FAN.VERTICAL,SHAFT-UP		
BEARING D.E.	6204 DDU	LUBRICATION	LONG LIFE, WIDE RANGE
BEARING N.D.E.	6204 DDU		
SUPPLY LEAD	FLEX 2500 \pm 30 WITH CONDUIT ENTRY		
EARTH PROVISION	VIA SUPPLY LEAD		
BASIC BUILD SPECIFICATION	470-071-02	PAINT/ COLOUR	GREY PLAIN E/S
PERFORMANCE SPECIFICATION	SP94120-01		
CONNECTION DIAGRAM	393-135	RATING LABEL	SSTDAUTO.FMT

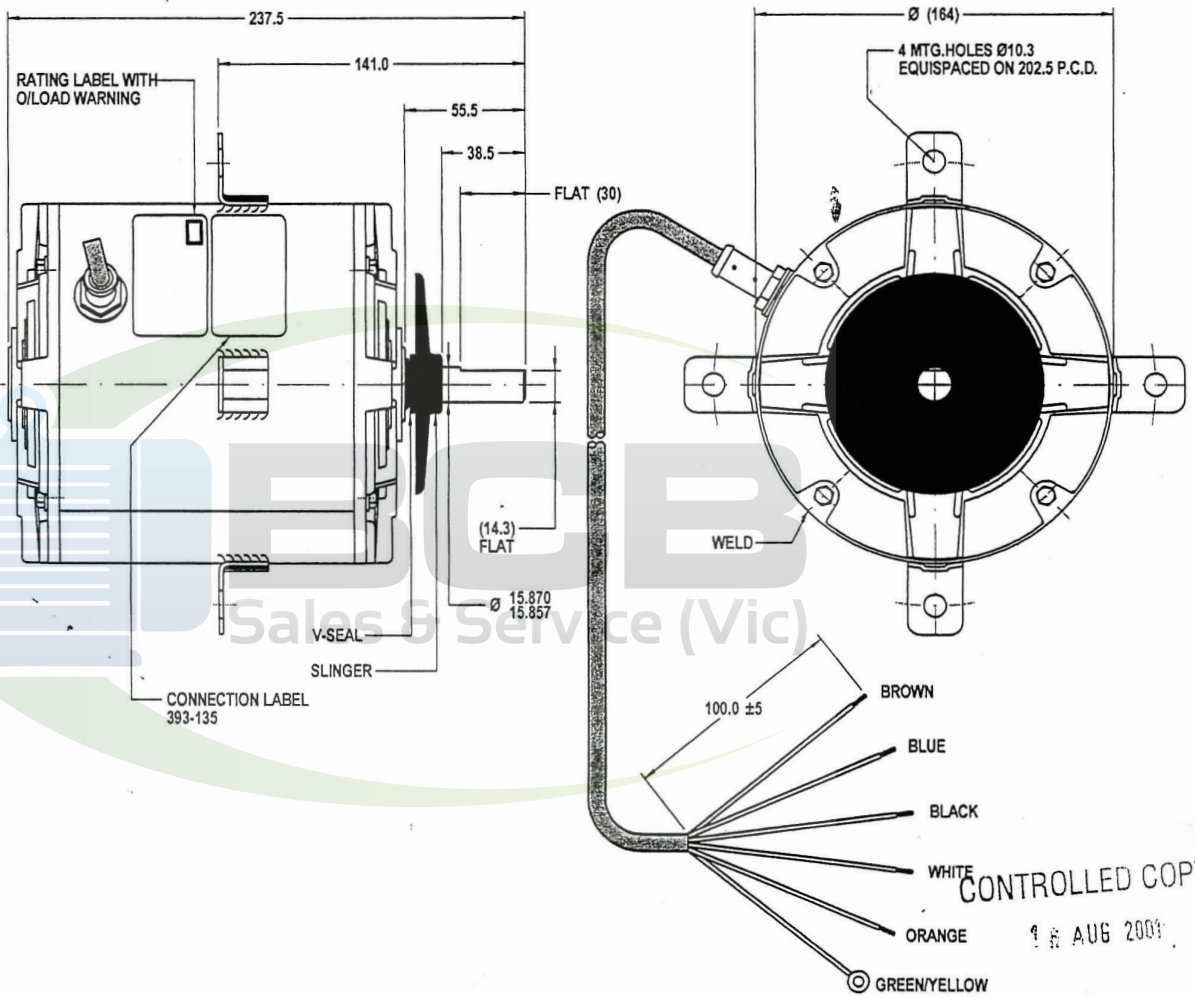

FASCO DESIGNED AND MANUFACTURED TO AUSTRALIAN STANDARDS & SPECIFICATIONS

C N693 451 - 022 - 0055

MODEL 809436NTB-B11

VOLTS 415	R.P.M. 940	CLASS B130	Hz 50
WATTS 375	TYPE 3PH	$\mu F/V$ S NIL	Ph 3
AMPS 1.1	DUTY A.O.M.	$\mu F/V$ R NIL	PROT. AUTO

WARNING MOTOR FITTED WITH INTERNAL AUTO RESET OVERLOAD AND MAY RESTART WITHOUT WARNING

SPECIAL REQUIREMENTS:
 1)_ CONDUIT ASSEMBLY TO SPECIFICATION BEI-250.
 2)_ MOTOR TO BE WEATHERPROOFED TO SPEC. BEI-176.

UNLESS OTHERWISE SPECIFIED : DIMENSIONS ARE IN MM. TOLERANCES

DECIMALS	ANGULAR
.X \pm 1.0	\pm 30'
.XX \pm 0.5	

MOTOR WEIGHT 1 (BCB SALES & SERVICE)

PH : 03 9546 3833
 FAX : 03 9546 3356

DATE: 23/01/01

THIS DRAWING REMAINS THE PROPERTY OF FASCO MOTORS AND MAY NOT BE USED, COPIED OR REPRODUCED WITHOUT WRITTEN PERMISSION FROM FASCO MOTORS

FRAME	MOTOR
STATUS	120:9436T-375-HCH:LGL
R	
SHEET	DWG. NO.
A3	809436NTB-B11
	REVISION
	E

MIC No. 004212
 Date: 20/07/01
 By: NITHAD
 MIC INSERT MOTOR WEIGHT 10.1 KG AND SPECIAL REQUIREMENTS OF BEI-251 TO BE BEI-176

CONTROLLED COPY
 1 AUG 2001