



THIRD ANGLE PROJECTION

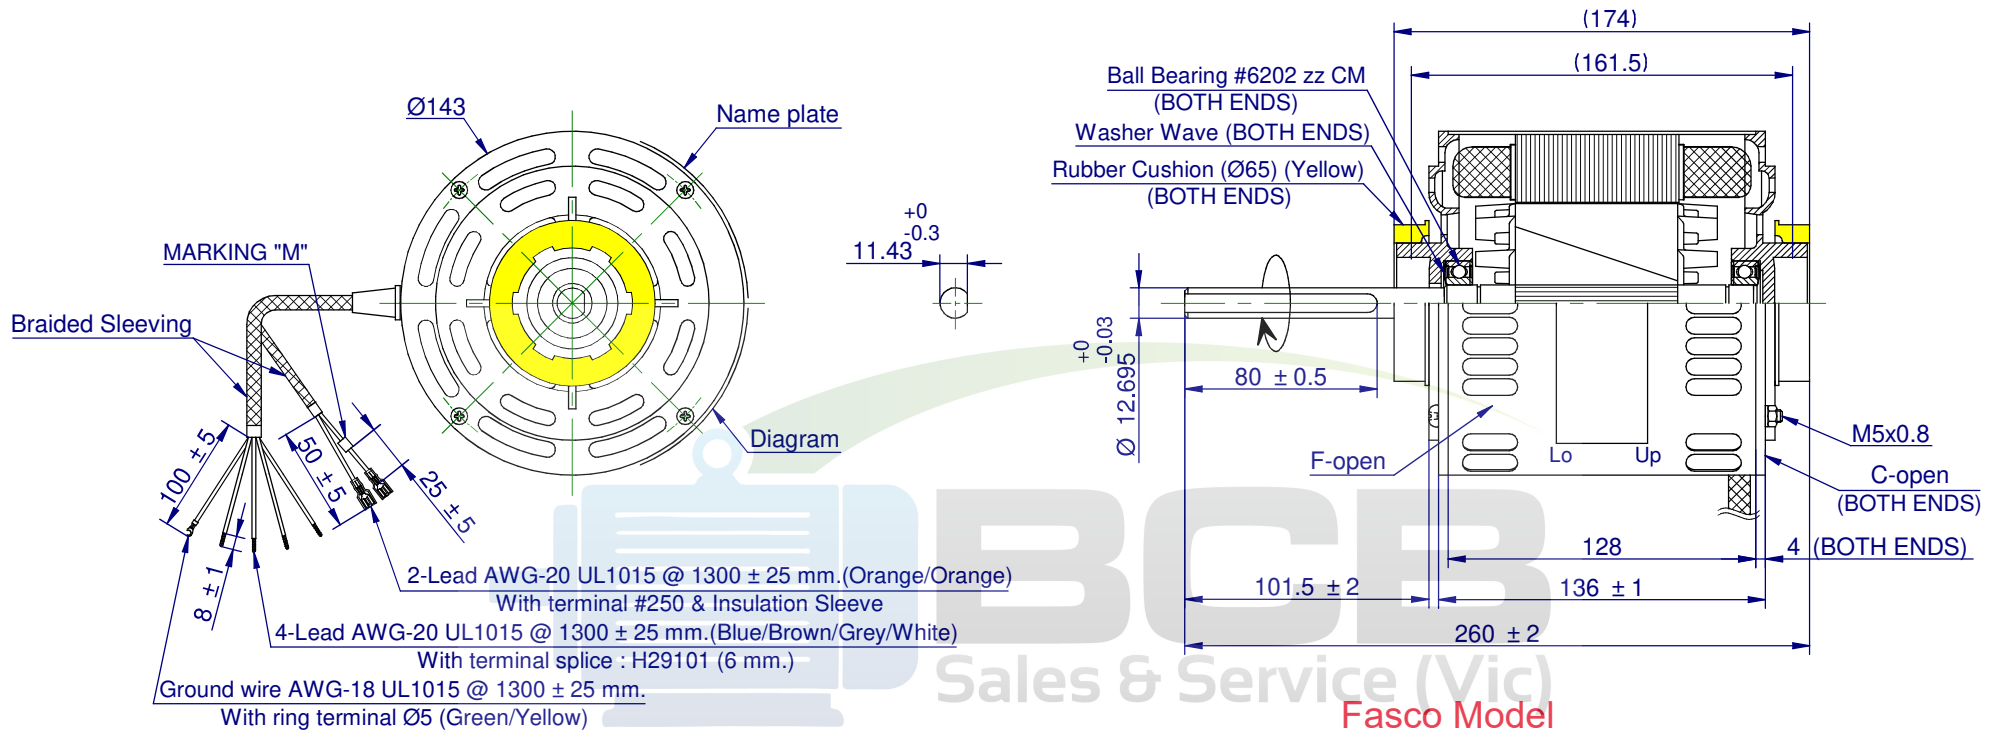

Fasco Model
8061S082-17
Rebranded as
Marathon

marathon Motors		DESIGNED AND MANUFACTURED TO AUSTRALIAN STANDARDS & SPECIFICATIONS			
MODEL		8M61S082-17			
		DDMMYYYYXX			
VOLTS 240	R.P.M. 1200/3SP	CLASS B130	Hz 50		
WATTS 600	TYPE CSR	µF/V R 15/440	Ph 1		
AMPS 4.4	DUTY AOM	PROT. AUTO			
WARNING MOTOR FITTED WITH INTERNAL AUTO RESET OVERLOAD AND MAY RESTART WITHOUT WARNING					

NAMEPLATE

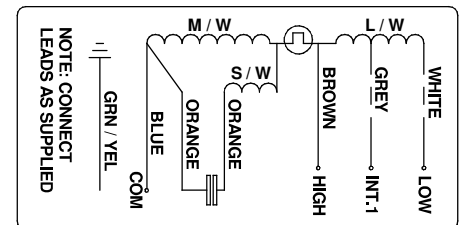

DIAGRAM

SPECIAL REQUIREMENTS:

- 1) After the motor is complete, applied rust proof oil at shaft end.
- 2) The tensile strength of each lead wire at least 4 Kgs.
- 3) The runout of the shaft end circumference 0.10 mm.

MOTOR SPECIFICATION									
Q,R. NO.		---		CUSTOMER PART NO.		8061S082-17			
MOTOR RATING	VOLTS	240	Hz	50	PH	1	DUTY	A.O.M.	
	RPM.	1200/3SP			4.4		AMPS		
	NOM. OUTPUT	600 WATTS							
ROTATION		CLOCK WISE AT DRIVE END							
CAPACITOR	START	----	µF/V	RUN	15/440 µF/V				
MOTOR TYPE		CSR		INSULATION CLASS		B130			
THERMAL PROTECTION		AUTO RESET OVERLOAD							
DATA TEST NO.		W443-1726-SL		PAINT/ COLOUR		GREY #5082			

UNLESS OTHERWISE SPECIFIED : DIMENSIONS ARE IN MM. TOLERANCES
 DECIMALS ANGULAR
 .X ± 1.0 ± 30'
 .XX ± 0.1

THIS DRAWING REMAINS THE PROPERTY OF REGAL BELOIT AUSTRALIA AND MAY NOT BE USED, COPIED OR ISSUED WITHOUT WRITTEN PERMISSION FROM REGAL BELOIT AUSTRALIA

MOTOR WEIGHT		
8.73 kg.		
DRAWN	THANATCHA	22/11/2022
CHECKED	EKAPHOP	22/11/2022
RELEASED	WEERAPAN	22/11/2022
SCALE	N.T.S.	

BCB
Sales & Service (Vic)
sales@bcbsales.com.au
03 9546 3833

FRAME	MOTOR		
STATUS	R		
SHEET	DWG. NO.		
A3	8M61S082-17		REVISION
			A

DOC No. _____
By: _____
Date: _____
DOC No. _____
Note: _____