


THIRD ANGLE PROJECTION.

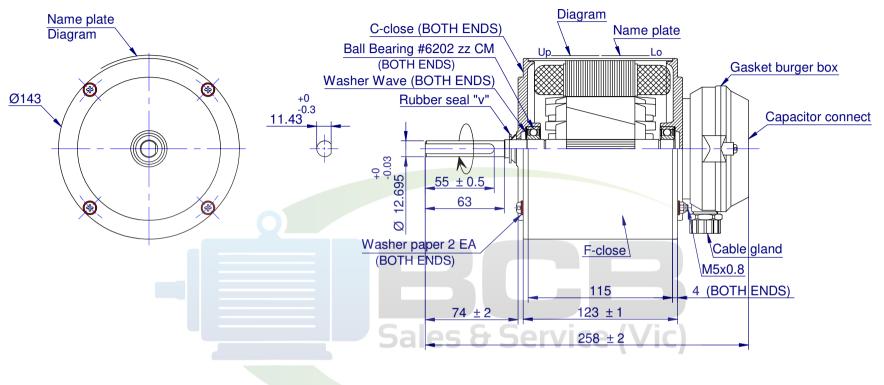

Fasco Model 8061S137-80 Rebranded as Marathon

MOTOR SPECIFICATION										SPECIAL REQUIREN 1) After the motor is complete.			
Q.R. NO.		QR230054		CUST	CUSTOMER PART I			NO. 8061S137		3137-80S			
MOTOR RATING	VOLTS	240	Н	z 5	50	PH	1		DUTY	A.O.M.	. 3) The runout of the shaft end		
	RPM.		10				2.3 AMPS		AMF	4) Default : rotation clockwise PS 5) Motor to be packed in single			
	NOM. OUTPUT	250 WATTS											
ROTATION		CLOCKWISE DRIVE END (REVERSIBLE)							UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MM.				
CAPACITOR		START			JF/V	RUN		4/440		μF			
MOTOR TYPE		CSR II			INSULATION CLASS			B130		.X ± 1.0 ± 30'			
THERMAL	THERMAL PROTECTION		AUTO RESET OVERLOAD							.XX ± 0.1 THIS DRAWING REMAINS THE PROPERTY OF REGAL			
DATA TEST NO.		W443-1570-SL			PAINT/ COLOUR			GREY #5082			BELOIT AUSTRALIA AND MAY NOT BE USED, COPIED OR ISSUED WITHOUT WRITTEN PERMISSION FROM REGAL BELOIT AUSTRALIA		

SPECIAL REQUIREMENTS:

- I) After the motor is complete, applied rust proof oil at shaft end.
- The tensile strength of each lead wire at least 4 Kgs The runout of the shaft end circumference 0.08 mm.

MOTOR WEIGHT

DRAWN

SCALE

CHECKED

RELEASED

7.50

N.T.S.

THANATCHA

EKAPHOP


WEERAPAN

Default: rotation clockwise at drive end.

Motor to be packed in single carton.

UNLESS OTHERWISE SPECIFIED:

		L	MODEL	-	8M61	S137-809	3
						DDMMYY	′XXX
VOLTS	240	R.P.I	м. 910	CLASS	B130	Hz	50
WATTS	250	TYPE	CSR	μF/V R	4/440	Ph	1
AMPS	2.3	DUT	Y AOM	PROT.	AUTO		



NAMEPLATE

kg.	BCB				
05/00/0000	Sales & Service (Vic) sales@bcbsales.com.au				
05/08/2023	03 9546 3833				
05/08/2023	03 9340 3633				

FRAME	MOTOR
STATUS	250W 6P 1SP 240V S/S REV
R	FASCO MODEL 8061S137-80S

SHEET DWG. NO. 8M61S137-80S

A3

REVISION Α