



CONVECTION RANGES

Features

- 30,000 BTU per Top burner, 33,000 BTU per Convection oven
 - Stainless steel front backriser, lift-off high shelf
 - Oven thermostat temperate range from 200°F - 500°F
- Interior oven dimensions: 20" x 22.5" x 13.75" (IR-4-24CO)
26" x 22.5" x 13.75" (IR-6-36CO / IR-10-60CO)
- Porcelain coated oven interior side guides & bottom
 - Shipped standard as Natural Gas, LP conversion kit included
 - Optional casters are available
 - This appliance is manufactured for commercial installation only, not intended for home use
 - NEMA 5-15P 120V cord & plug (for North America)
220 voltage and plug type available (please indicate before ordering)
 - 3/4" NPT rear gas connections. Supply gas pressure not to exceed 14" W.C.(1/2 PSI)
Natural gas operating pressure - 5.0" W.C. Recommended supply pressure 7-9" W.C.
Propane gas operating pressure - 10.0" W.C. Recommended supply pressure 11-12" W.C.
 - A gas pressure regulator supplied with unit must be installed.
 - An adequate ventilation system is required for Commercial Cooking Equipment.
 - Requires a 6" clearance at both side and rear if adjacent to combustible materials
 - CSA design certified NSF listed



IR-4-24CO



IR-6-36CO



IR-10-60CO

GAS REQUIREMENTS


- Natural Gas or Liquid Propane (LP) Gas main supply required
- A conversion kit is supplied with each unit. In order to avoid any warranty issues, conversion of your unit must be completed by an authorized Ikon service agent
- 3/4" NPT gas connection
- 30,000 BTU's per burner
- One pilot light per burner
- Natural gas 5.0" W.C., LP gas 10" W.C.





CONVECTION RANGES

Dimensions in inches

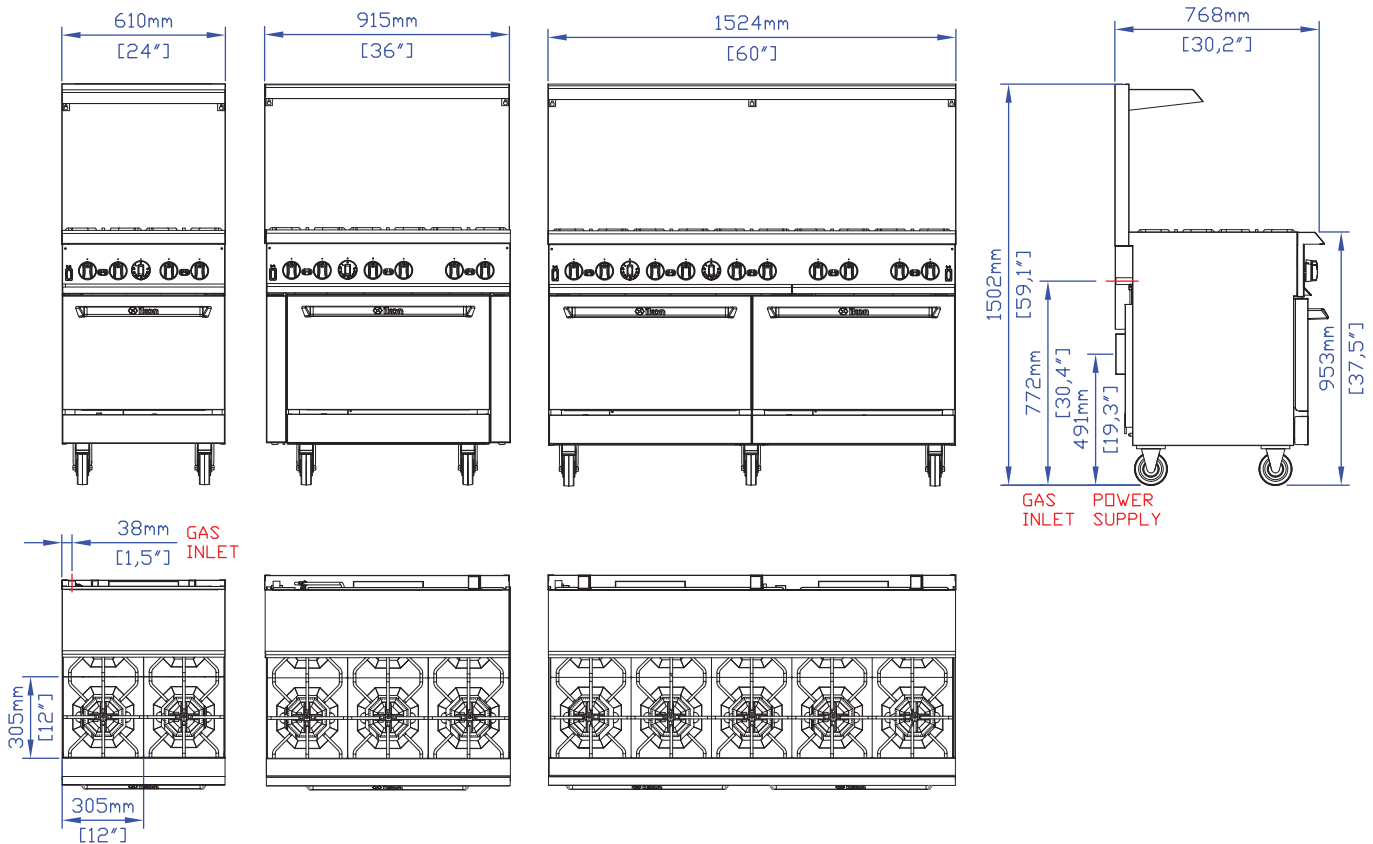

Specifications

Oven inside dimensions

IR-4-24CO 20" x 22.5" x 13.75" \ IR-6-36CO 26" x 22.5" x 13.75" \ IR-10-60CO 26" x 22.5" x 13.75"

Please Note: These items are shipped on a pallet and are crated for protection during LTL shipment.

Model	Description	Total BTU	KW	Overall Dimensions	Weight	Shipping Dimensions	Shipping Weight
IR-4-24CO	(4) Burners	153,000 NG	45 40	24" x 30.2" x 59.1" 610mm x 768mm x 1502mm	277 LBS 126 Kg	28" x 37" x 45" 710mm x 940mm x 114mm	277 LBS 126 Kg
IR-6-36CO	(6) Burners	213,000 NG	63 56	36" x 30.2" x 59.1" 915mm x 768mm x 1502mm	361 LBS 164 Kg	39.8" x 37" x 45" 1010mm x 940mm x 114mm	361 LBS 164 Kg
IR-10-60CO	(10) Burners	366,000 NG	107 96	60" x 30.2" x 59.1" 1524mm x 768mm x 1502mm	621 LBS 282 Kg	65" x 37" x 45" 1650mm x 940mm x 114mm	621 LBS 282 Kg



Tel.: 786.600.4687 / Toll Free: 844.218.8477
Fax: 786.661.4100



Tel.: 514.737.9701 / Toll Free: 888.275.4538
Fax: 514.342.3854 / Toll Free: 877.453.8832
sales@mvpgroupcorp.com

3560 NW 56th St.
Fort Lauderdale, FL 33309 USA

5659 Royalmount Ave.
Montreal, QC H4P2P9 CANADA



www.mvpgroupcorp.com