

# COFFEE BREWING SYSTEMS

## CBS-1260 Plus Brewers 3.0-3.5 GALLON BREWING SYSTEM

Shown with D012 12.0L / 3.0G LUXUS® Thermal Dispenser



### PLUG AND PLAY OPERATION

Batch buttons are pre-programmed at the factory. If desired the USB port can be used to upload and download recipes.



### CASCADING SPRAY DOME

Patented design provides even saturation of the coffee bed for maximum extraction. Lime resistant design makes for less service calls.

## DISPENSERS

### CBS-1260 Plus Brewers

#### DISPENSERS

##### D012

12.0 Liter / 3.0 Gallon  
LUXUS® Thermal  
Dispenser  
TPD-30

NSF



All dispensers **SOLD SEPARATELY**.



#### BREW BASKET DESIGN

Advanced brew basket design provides a deeper bed depth and superior thermal insulation for better extraction.



#### CONTEMPORARY DESIGN

Traditional FETCO core with modern design enhancements fits well in any front-of-house or back of the house application.



#### ECO MODE

Reduces tank temperature during periods of non-operation to cut down on electricity usage.

## ACCESSORIES

### CBS-1260 Plus Brewers

#### BREW BASKETS AND PAPER FILTERS

| Item Number        | Brew Basket     | Coffee Capacity   | Filter Size | Filter SKU | Filter/Case |
|--------------------|-----------------|-------------------|-------------|------------|-------------|
| All configurations | Stainless Steel | Up to 32oz / 907g | 20" x 8"    | F004       | 500/cs      |

##### B00828004

21" x 7"  
Stainless Steel  
Brew Basket



##### B00828005

21" x 7"  
Stainless Steel  
Brew Basket  
with Clips

##### F004

20" x 8"  
Paper Filters



Contact Customer Service or your Sales Person for more options.

#### WATER FILTRATION SYSTEM

| Filtration System | Item Number | Item Description      | Rated Capacity | Working Pressure                    | Weight            |
|-------------------|-------------|-----------------------|----------------|-------------------------------------|-------------------|
| Everpure®         | A039        | In-Line System        | 113,563 liters | 10-125 psi [0.7-8.6 bar], non-shock | 6.0 lbs / 2.7 kg  |
| Everpure®         | A075        | Replacement Cartridge | 113,563 liters | 10-125 psi [0.7-8.6 bar], non-shock | 6.0 lbs / 2.7 kg  |
| BWT Bestmax       | A138        | In-Line System        | 3,002 liters   | 29-116 psi [2-8 bar], non-shock     | 11.0 lbs / 5.0 kg |
| BWT Bestmax       | A139        | Replacement Cartridge | 3,002 liters   | 29-116 psi [2-8 bar], non-shock     | 11.0 lbs / 5.0 kg |
| BWT Bestmax       | A140        | In-Line System        | 4,562 liters   | 29-116 psi [2-8 bar], non-shock     | 11.0 lbs / 5.0 kg |
| BWT Bestmax       | A141        | Replacement Cartridge | 4,562 liters   | 29-116 psi [2-8 bar], non-shock     | 11.0 lbs / 5.0 kg |

##### EVERPURE®

In-Line Water  
Filtration System



**SET INCLUDES:** 1ea. commercial quality corrosion resistant filter head 1ea. taste and odor filter cartridge (FETCO® #A075) / 1ea. 3/8" x 4' connection hose / 1 set — mounting bracket and hardware.

- Recommended for large-sized operations
- Taste and odor filter for extremely turbid (cloudy) water
- Granular-activated carbon reduces sediment and chlorine
- Quick-disconnect style head/cartridge design cartridge for effortless replacement
- Durable, corrosion-resistant head includes built-in shutoff valve


##### BWT BESTMAX

In-Line Water  
Filtration System



**SET INCLUDES:** 1ea. filter cartridge / 1ea. universal filter head / 1ea. wall mounting bracket Braided hose supplies 3/8" and 3/4" compression, in 24" or 48" lengths

- Recommended for small- to medium-sized operations
- Carbonate hardness removal prevents scale deposits and retains minerals
- Granular-activated carbon reduces sediment and chlorine
- Quick-disconnect style head/cartridge design cartridge for effortless replacement
- Durable, corrosion-resistant head includes built-in shutoff valve
- Four bypass settings allows for different water qualities and product preferences



TECHNICAL SPECIFICATIONS

NORTH AMERICA

CBS-1261 Plus Brewer

| ELECTRICAL                        |                               |                    |                                          |                                   |            |                    |                    |                           |                            |                                                                                                                                                                         |
|-----------------------------------|-------------------------------|--------------------|------------------------------------------|-----------------------------------|------------|--------------------|--------------------|---------------------------|----------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Item Number                       | Brew Basket                   | Voltage            | Heater Config.                           | Phase                             | Wires      | kW                 | Connection         | Max Amp Draw              | [Gal] / [L] Hour           | Certification                                                                                                                                                           |
| E1261US-UB230-MM110<br>DUAL PHASE | 21x7" Metal                   | 208-240<br>208-240 | 2 x 3.0 kW / 240 V<br>3 x 3.0 kW / 240 V | 1<br>3                            | 2+G<br>3+G | 4.6-6.1<br>6.9-9.1 | No Cord<br>No Cord | 22.1-25.4<br>19.2-22.1    | 15.9 / 60.4<br>23.9 / 90.6 |   |
| WATER                             |                               |                    |                                          |                                   |            |                    |                    |                           |                            |                                                                                                                                                                         |
| Water Inlet                       | Water Pressure [psig] / [Bar] |                    |                                          | Minimum Flow Rate [gpm] / [L/min] |            |                    |                    | Tank Capacity [Gal] / [L] |                            |                                                                                                                                                                         |
| 3/8" Male Flare                   | 20-75 / 1.37-5.17             |                    |                                          | 1.50 / 5.68                       |            |                    |                    | 8.63 / 32.67              |                            |                                                                                                                                                                         |

CBS-1262 Plus Brewer

| ELECTRICAL          |                               |         |                    |                                   |       |           |            |                           |                  |                                                                                                                                                                         |
|---------------------|-------------------------------|---------|--------------------|-----------------------------------|-------|-----------|------------|---------------------------|------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Item Number         | Brew Basket                   | Voltage | Heater Config.     | Phase                             | Wires | kW        | Connection | Max Amp Draw              | [Gal] / [L] Hour | Certification                                                                                                                                                           |
| E1262US-3B330-MM110 | 21x7" Metal                   | 208-240 | 3 x 3.0 kW / 240 V | 3                                 | 3+G   | 6.9-9.1   | No Cord    | 19.2-22.1                 | 23.9 / 90.6      |   |
| E1262US-3B340-MM110 | 21x7" Metal                   | 208-240 | 3 x 4.0 kW / 240 V | 3                                 | 3+G   | 9.1-12.1  | No Cord    | 25.4-29.3                 | 31.9 / 120.8     |   |
| E1262US-3B630-MM110 | 21x7" Metal                   | 208-240 | 6 x 3.0 kW / 240 V | 3                                 | 3+G   | 13.6-18.1 | No Cord    | 37.5-43.7                 | 47.8 / 181.3     |   |
| E1262US-3B640-MM110 | 21x7" Metal                   | 208     | 6 x 4.0 kW / 240 V | 3                                 | 3+G   | 18.1      | No Cord    | 50.4                      | 47.8 / 181.3     |   |
| WATER               |                               |         |                    |                                   |       |           |            |                           |                  |                                                                                                                                                                         |
| Water Inlet         | Water Pressure [psig] / [Bar] |         |                    | Minimum Flow Rate [gpm] / [L/min] |       |           |            | Tank Capacity [Gal] / [L] |                  |                                                                                                                                                                         |
| 3/8" Male Flare     | 20-75 / 1.37-5.17             |         |                    | 3.00 / 11.36                      |       |           |            | 15.86 / 60.04             |                  |                                                                                                                                                                         |

1 This version is made to order and it might require longer production lead time. Please ask your local sales representative for more information.

TECHNICAL SPECIFICATIONS  
INTERNATIONAL

CBS-1261 Plus Brewer

| ELECTRICAL           |             |                 |                    |       |         |           |            |              |                  |               |
|----------------------|-------------|-----------------|--------------------|-------|---------|-----------|------------|--------------|------------------|---------------|
| Item Number          | Brew Basket | Voltage         | Heater Config.     | Phase | Wires   | kW        | Connection | Max Amp Draw | [Gal] / [L] Hour | Certification |
| E1261IN-3C330-MM110  | 21x7" Metal | 220/380-240/415 | 3 x 3.0 kW / 240 V | 3     | 3L/N/G  | 7.7-9.1   | No Cord    | 12.0-12.9    | 23.9 / 90.6      | NSF cULus     |
| E1261IN-3C340-MM110  | 21x7" Metal | 220/380-240/415 | 3 x 4.0 kW / 240 V | 3     | 3L/N/G  | 10.2-12.1 | No Cord    | 15.8-17.2    | 30.0 / 113.7     | NSF cULus     |
| E1261IN-3C350-MM110¹ | 21x7" Metal | 220/380-240/415 | 3 x 5.0 kW / 240 V | 3     | 3L/N/G  | 12.7-15.1 | No Cord    | 19.6-21.3    | 30.0 / 113.7     | NSF cULus     |
| E1261NM-3B350-MM110  | 21x7" Metal | 208-240         | 3 x 5.0 kW / 240 V | 3     | 3+G     | 11.4-15.1 | No Cord    | 31.8-36.6    | 30.0 / 113.7     | NSF NOM       |
| E1261CE-3C330-MM110  | 21x7" Metal | 230/400         | 3 x 3.0 kW / 240 V | 3     | 3L/N/PE | 8.4       | No Cord    | 12.5         | 22.1 / 83.6      | NSF CE        |
| E1261CE-3C340-MM110  | 21x7" Metal | 230/400         | 3 x 4.0 kW / 240 V | 3     | 3L/N/PE | 11.1      | No Cord    | 16.5         | 29.2 / 110.8     | NSF CE        |

| WATER           |                               |                                   |                           |
|-----------------|-------------------------------|-----------------------------------|---------------------------|
| Water Inlet     | Water Pressure [psig] / [Bar] | Minimum Flow Rate [gpm] / [L/min] | Tank Capacity [Gal] / [L] |
| 3/8" Male Flare | 20-75 / 1.37-5.17             | 1.50 / 5.68                       | 8.63 / 32.67              |

CBS-1262 Plus Brewer

| ELECTRICAL           |             |                 |                    |       |         |           |            |              |                  |               |
|----------------------|-------------|-----------------|--------------------|-------|---------|-----------|------------|--------------|------------------|---------------|
| Item Number          | Brew Basket | Voltage         | Heater Config.     | Phase | Wires   | kW        | Connection | Max Amp Draw | [Gal] / [L] Hour | Certification |
| E1262IN-3C350-MM110¹ | 21x7" Metal | 220/380-240/415 | 3 x 5.0 kW / 240 V | 3     | 3L/N/G  | 12.7-15.1 | No Cord    | 19.6-21.3    | 39.9 / 151.1     | NSF cULus     |
| E1262IN-3C630-MM110  | 21x7" Metal | 220/380-240/415 | 6 x 3.0 kW / 240 V | 3     | 3L/N/G  | 15.2-18.1 | No Cord    | 23.4-25.4    | 47.8 / 181.3     | NSF cULus     |
| E1262NM-3C630-MM110  | 21x7" Metal | 208-240         | 6 x 3.0 kW / 240 V | 3     | 3+G     | 13.6-18.1 | No Cord    | 37.9-43.7    | 47.8 / 181.3     | NSF NOM       |
| E1262CE-3C340-MM110  | 21x7" Metal | 230/400         | 3 x 4.0 kW / 240 V | 3     | 3L/N/PE | 11.1      | No Cord    | 16.3         | 29.2 / 110.8     | NSF CE        |
| E1262CE-3C350-MM110  | 21x7" Metal | 230/400         | 3 x 5.0 kW / 240 V | 3     | 3L/N/PE | 13.9      | No Cord    | 20.3         | 36.7 / 139.0     | NSF CE        |

| WATER           |                               |                                   |                           |
|-----------------|-------------------------------|-----------------------------------|---------------------------|
| Water Inlet     | Water Pressure [psig] / [Bar] | Minimum Flow Rate [gpm] / [L/min] | Tank Capacity [Gal] / [L] |
| 3/8" Male Flare | 20-75 / 1.37-5.17             | 3.00 / 11.36                      | 15.86 / 60.04             |

1 This version is made to order and it might require longer production lead time. Please ask your local sales representative for more information.




DIMENSIONS

CBS-1261 Plus Brewer

| DIMENSIONS          |                  |                 |                 |                 |                           |                      | WEIGHT          |                    |                     |
|---------------------|------------------|-----------------|-----------------|-----------------|---------------------------|----------------------|-----------------|--------------------|---------------------|
|                     | Height (A)       | Width (B)       | Depth (D)       | Depth (E)       | Brew Basket Clearance (F) | Faucet Clearance (G) |                 | Empty [lbs] / [kg] | Filled [lbs] / [kg] |
| Product Dimensions  | 41.38" 105.11 cm | 17.88" 45.42 cm | 27.50" 69.85 cm | 22.25" 56.52 cm | 23.88" 60.66 cm           | 12.13" 30.80 cm      | Product Weight  | 88 lbs 39.9 kg     | 160 lbs 72.6 kg     |
| Shipping Dimensions | 39.0" 99.06 cm   | 23.0" 58.42 cm  | 28.0" 71.72 cm  | N/A             | N/A                       | N/A                  | Shipping Weight | 97 lbs 44.0 kg     | N/A                 |

CBS-1262 Plus Brewer

| DIMENSIONS          |                  |                |                 |                 |                           |                      | WEIGHT          |                    |                     |
|---------------------|------------------|----------------|-----------------|-----------------|---------------------------|----------------------|-----------------|--------------------|---------------------|
|                     | Height (A)       | Width (C)      | Depth (D)       | Depth (E)       | Brew Basket Clearance (F) | Faucet Clearance (G) |                 | Empty [lbs] / [kg] | Filled [lbs] / [kg] |
| Product Dimensions  | 41.38" 105.11 cm | 32.0" 81.28 cm | 27.50" 69.85 cm | 22.25" 56.52 cm | 23.88" 60.66 cm           | 12.13" 30.80 cm      | Product Weight  | 130 lbs 59.0 kg    | 266 lbs 120.7 kg    |
| Shipping Dimensions | 39.0" 99.06 cm   | 37.0" 93.98 cm | 29.0" 73.66 cm  | N/A             | N/A                       | N/A                  | Shipping Weight | 140 lbs 63.5 kg    | N/A                 |

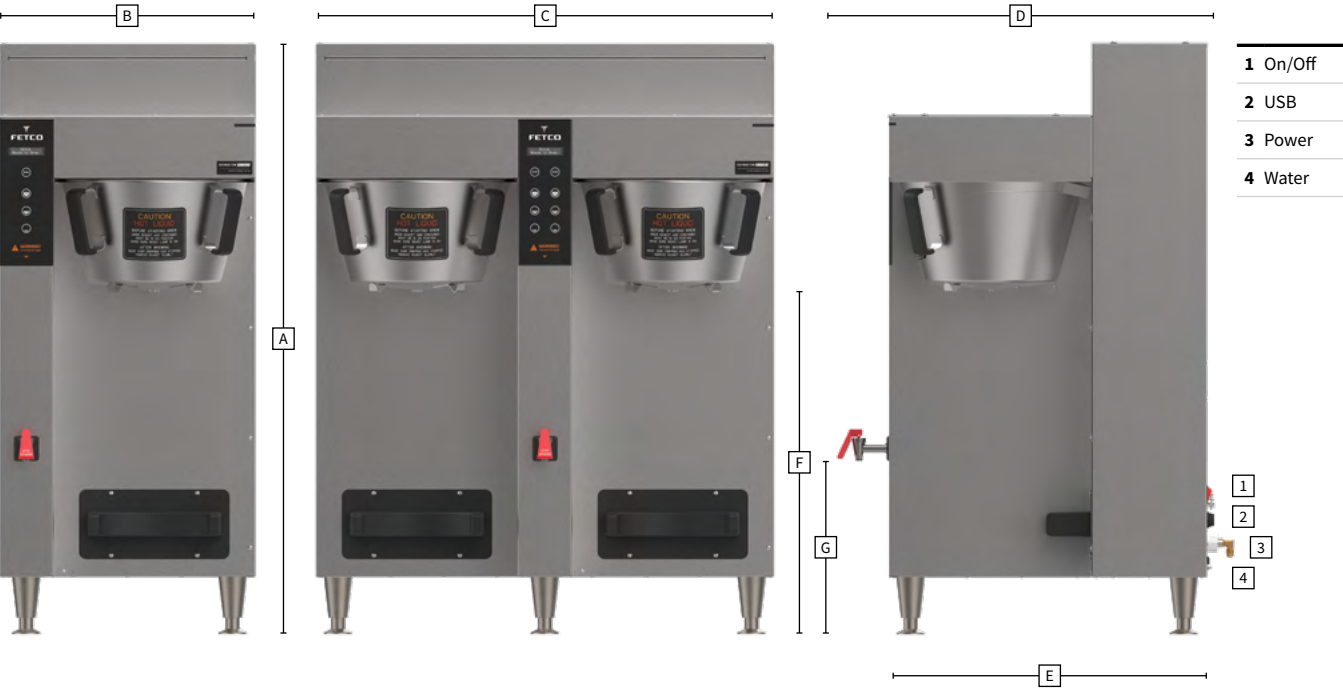

FAX  
+1.847.719.3001