


Product Specifications

MODEL
30CFO
30CFO-B

CATEGORY
 Circulation

DESCRIPTION

30" circulation fan with OSHA guards and 2-speed motor with pull chain switch, designed for agriculture, horticulture and industrial use.

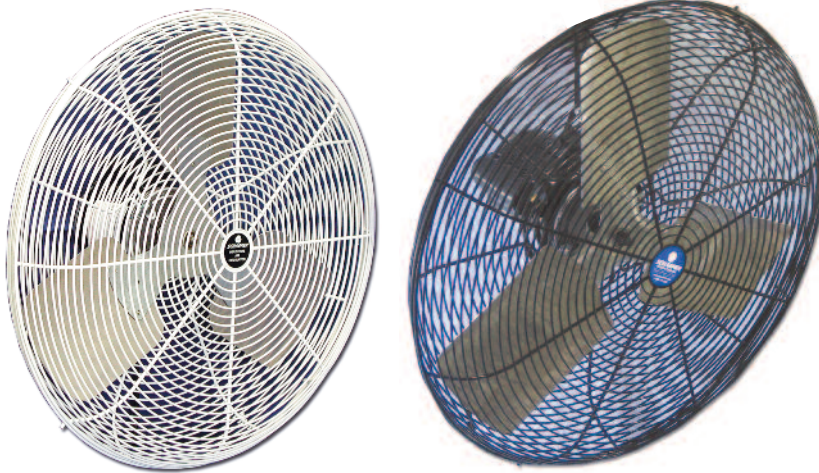

FEATURES

- Maintenance-free, totally enclosed, thermally protected motor with pre-lubricated ball bearings and two-speed pull chain switch.
- Durable powder coated zinc over steel fan guard meets OSHA requirements.
- Includes ten foot, 115 volt power cord.

DECIBELS

	High	Low
At fan	83 dB	74 dB
At 25'	72 dB	66 dB


DIMENSIONS

A = 33-1/2" B = 7-1/4" C = 14-1/2"

PERFORMANCE

CCFM 9424 / 6996
 Test Number Schaefer 0202 / Schaefer 0203

AIR THROW 447 ft/min at 25' 281 ft/min at 50'

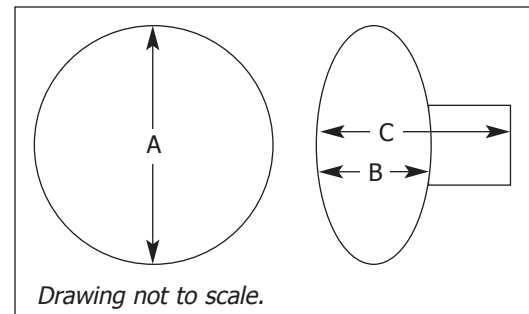

MOTOR

CS300	1/2 HP	2 Speed	60 Hz	1 Phase	115 Volts	5.2 Amps
Insul = B	CSA Certified	TEAO	1075 RPM	SF = 1	Max 40° C	

BLADE

AFB-3000SQ 3 Wings 1/2" Bore Aluminum

SHIPPING

53 lbs 34" x 34" x 13" UPS = Yes Pallet Quantity = 10



800-779-3267

sales@schaeferfan.com • www.schaeferfan.com

Test data, performance, energy consumption and other specifications are based on results in a controlled environment. Actual results will vary. Product specifications subject to change. ©2011 Schaefer Ventilation Equipment 5-16-12