

Product Specifications

MODEL
WC-1HPMFA
WCG-1HPMFA

CATEGORY
 Evaporative Cooling

DESCRIPTION
 Completely self-contained portable evaporative cooler with 2-speed blower motor, designed for agriculture, horticulture and industrial use.



FEATURES

- High impact ABS plastic housing over heavy-duty aluminum base and interior frame.
- Evaporation media on all four sides; chemically treated cellulose paper resists deterioration.
- Built-in 24 gallon water reservoir can be filled manually or automatically by garden hose attachment.
- Quiet, heavy-duty 2-speed blower motor with nine foot power cord plugs into standard 115V GFCI outlet.
- Automatic shut-off prevents pump damage in case of low water level.


DIMENSIONS

A = 33-1/2" B = 54-1/2"

PERFORMANCE

1730 FPM at 10 ft. from unit

dB on HIGH at face = 76
 at 25' = 57 dB on LOW at face = 70
 at 25' = 51

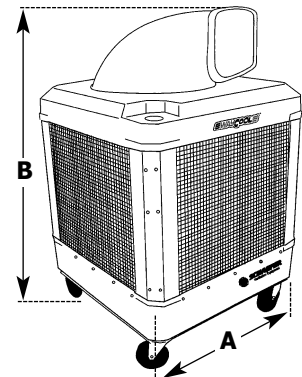

MOTOR

WC-1HPMTR	1 HP	2 Speed	60 Hz	1 Phase	115 Volts
Insul = B	ODP	1725 RPM	SF = 1	Max 40° C	12.4 Amps

PUMP

WC-PUMP-LG	280 GPH	115 Volts	1.3 Amps
------------	---------	-----------	----------

SHIPPING

225 lbs	Box = 36" x 36" x 60"	UPS = No	Pallet Quantity = 1
---------	-----------------------	----------	---------------------



800-779-3267
 sales@schaefervan.com • www.schaefervan.com

Test data, performance, energy consumption and other specifications are based on results in a controlled environment. Actual results will vary. Product specifications subject to change. ©2011 Schaefer Ventilation Equipment 7-5-11