



G-Drive Mini LED

Dimmable Driver


Specifications

SKU	P12V-60-30-D-Mini	P24V-60-30-D-Mini	P24V-96-30-D-Mini
Rated Power	60W	60W	96W
Rated Voltage	DC 12V	DC 24V	
Rated Current	5A	2.5A	4A
Input Voltage	100 – 130VAC		
Power Factor	0.94 @ 120VAC		
AC Current	0.75A	1.2A	
Leakage Current	<0.5mA/120VAC		
Short Circuit Protection	Hiccup mode, recovers automatically after fault condition is removed.		
Overload Protection	≤120% Hiccup mode, recovers automatically after fault condition is removed.		
Working Temperature	-40°C to +60°C <i>(see Load VS Ambient Temperature graph)</i>		
Warranty	6 - Years		
Certifications	UL 8750, Class 2		




Dimensions

- 84 x 40 x 25mm
- 18AWG Wires

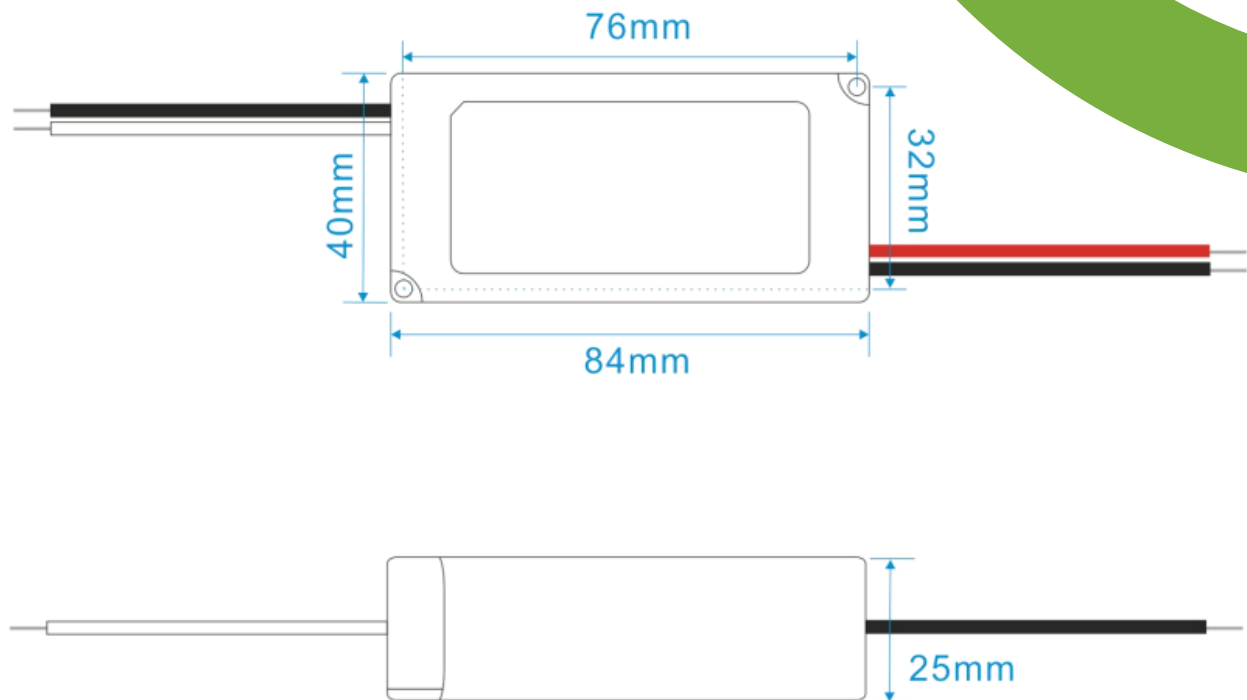

Load VS Ambient Temperature

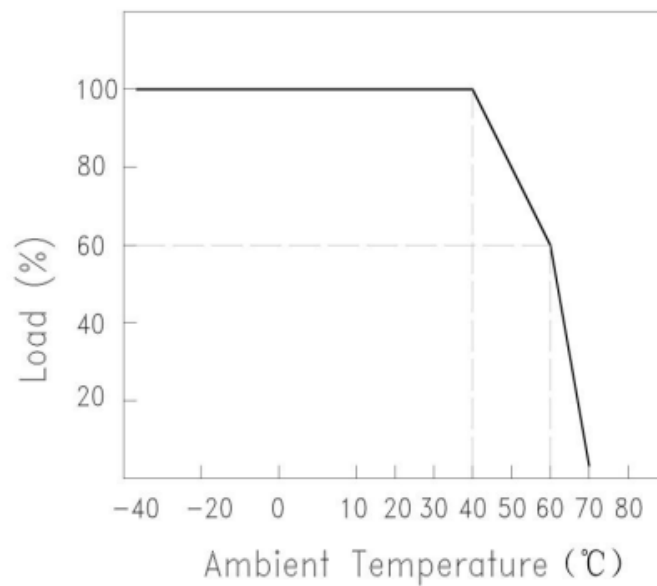

Installation Diagram

