


SPECIFIED

SOLUTIONS
Commercial Floors & Walls

Dominion Oak
Engineered

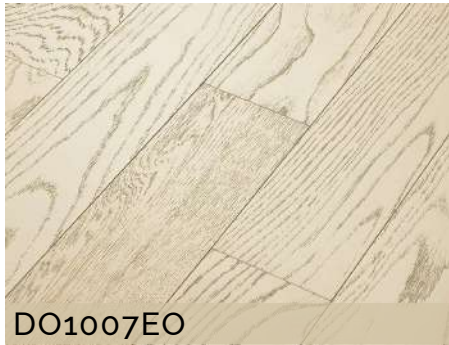

DO1007EO

DO1028EO

DO2012EO

DO5014EO

DO5052EO

DO1015EO

Style Number	DO583
Construction	Engineered
Thickness	1/2" (12mm)
Width	5"
Species	White Oak
Texture	Wire Brushed
Gloss Level	7%
Janka Hardness Rating	1360
Edge Description	Microbeveled
End Description	Microbeveled
SF per carton	29.53
SF per pallet	1,417.44
Installation	Nail, Staple, Glue, Float
Variation	High
GREENGUARD® Certified	Yes
Radiant Heat Approved	Yes (floating floors only)
Warranty	Lifetime Structural Warranty
All measurements are nominal.	Cartons may include random lengths.

Features

- Wire brushed white oak planks with a matte finish and neutral color palette create a sophisticated urban design.
- Sliced face veneers create clean, linear wood grain for a premium visual.
- Colors Astor, Cabot, Carnegie, Morgan and Roosevelt are also available in Fifth Avenue Oak Herringbone for unique pattern installations.

Sundry Recommendations

Style #	Style Name	Coverage	Moisture	Additional Features
ADHESIVES				
HS105	35MC — Urethane	35 SF / gal for moisture	No moisture test required	Sound control & crack suppressant
		60 SF / gal as adhesive	Up to 5 lbs. or 85% RH	
111SA	3-in-1 Ultra — MS	35 SF / gal for moisture	No moisture test required	Sound control & crack suppressant
		70 SF / gal as adhesive	Up to 5 lbs. or 85% RH	
SWADH	UreBond Plus	35 SF / gal for moisture	Up to 8 lbs. or 85% RH	
		60 SF / gal	Up to 5 lbs. or 85% RH	

Trim Pieces length: 78" (*Overlap Reducer and Overlap Stairnose are designed for floating installations only. These items are non-stocking — but are available through a quick-ship program. Delivery should take approximately 2 to 3 weeks.)



SRH12
Flush Reducer



SORH2
*Overlap Reducer



SSH12
Flush Stairnose



SOSH2
*Overlap Stairnose



SCH12
Threshold / Carpet Reducer



TMH78
T-Molding



QTR96
Quarter Round