

SPECIFIED

SOLUTIONS
Commercial Floors & Walls


Foundation Oak 7.5 *Engineered*




FO5060 CO



FO11070 CO

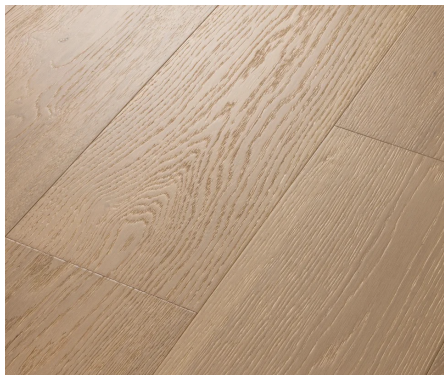

FO12020 CO

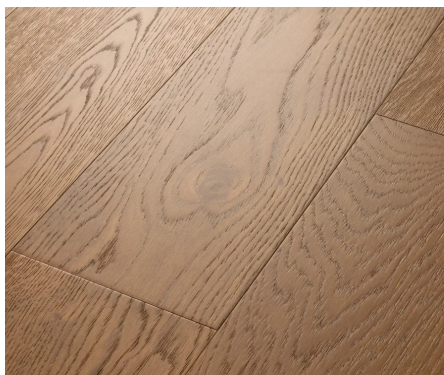

FO17050 CO



FO19016 CO

Foundation Oak 7.5

Engineered

HARDWOOD

	US Units
Construction	Engineered
Species	White Oak
Nominal Overall Thickness	3/8"
Nominal Width	7.5"
Finish	UV Aluminum Oxide
Gloss Level	7%
Surface Texture	Wirebrushed
Edge Description	Micro Bevel
End Description	Mb
Profile	Tongue And Groove
Weight per Carton	37.37 lbs
SQFT per Carton	27.2 sq ft
SQFT per Pallet	1496 sq ft
Installation Methods	Nail, Staple, Glue, Floating
Installation Grade	Above, On, Below
Variation	High
GREENGUARD® Certified	Yes
Radiant Heat Approved	Yes
Warranty	Lifetime Structural
All measurements are nominal.	Cartons may include random lengths.

Trim Pieces length: 78" (*Overlap Reducer and Overlap Stairnose are designed for floating installations only. These items are non-stocking - but are available through a quick-ship program. Delivery should take approximately 2 to 3 weeks.)



105FR
Flush Reducer



105OR
*Overlap Reducer



105FS
Flush Stairnose



105OS
*Overlap Stairnose



105TH
Threshold / Carpet
Reducer



103TM
T-Molding



103QR
Quarter Round

SPECIFIED

SOLUTIONS
Commercial Floors & Walls