

SALAD PREP TABLE

ASP60-16-S2

2-Door / Regular Top



Voltage/Frequency 115V/60Hz Refrigerant R290 Type of Defrost Automatic Exterior Material Stainless Steel Temperature Range °F 33 ~ 41°F Compressor Power (HP) 1/5


Interial Material Stainless Steel Nema Config. NEMA5-15P




PRODUCT FEATURES

- The compressor is mounted in the back and placed in the coolest possible area; this makes it easily accessible for servicing.
- **B.B.** Digital temperature controls with LED display for precise adjustment and automatic defrosting system.
- Temperatures in the cabinet range from 33 to 41 degrees Fahrenheit
- Higher Resistance to dust, high quality condenser.
- R290 Natural Refrigerant promotes faster cool down and efficient energy consump-
- Self-closing doors at 60° with stay open
- Stainless steel interior & exterior, sealed interior floors, and rounded cabinet corners for easy cleaning.
- 6" deep 1/6 plastic plan included.
- High quality coated stainless adjustable shelves prevent peel and rust.
- Lifetime warranty on hinges.
- 6" casters with lock for easy mobility.



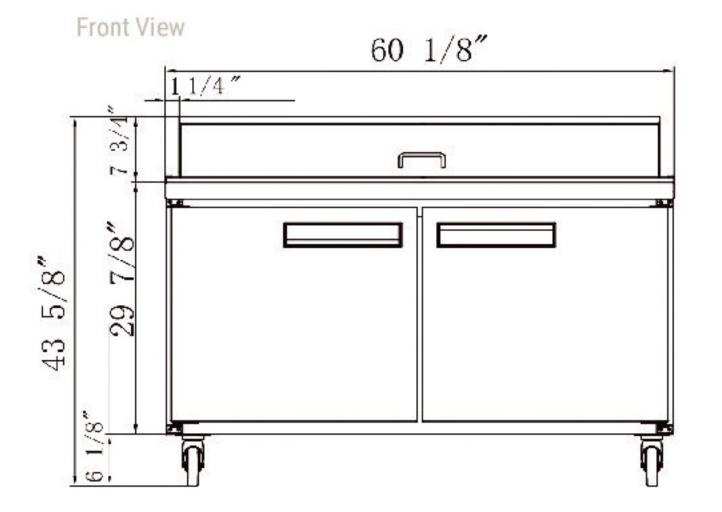

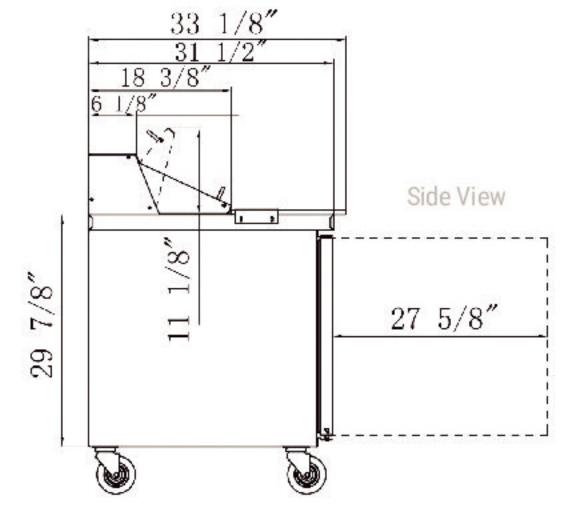

MODEL ASP60-16-52

60 x 14.5 **Cutting Board Size** Rated Voltage 115V 60Hz Rated Frequency Total Input Power 280W **Total Current** 2.4A **Total Capacity** 14.33 cu ft **Climatic Category** 4-5 **Protection Type** Design Pressure High Side **300 PSIG** Design Pressure Low Side **150 PSIG Insulation Blowing Gas** C-Pentane Refrigerant R290/3.88 oz

1/6 PAN COUNT: 16

1/6

MODEL	EXTERNAL DIMEN- SION	PACKAGING DIMENSION WXDXH (INCHES)			40HQ CONTAINER CERT.
ASP60-16-S2	60 1/8 x 31 1/2 x	64 3/8 x 35 7/8 x 48 3/8	275 lbs	2	28













