

REACH IN REFRIGERATOR

KR-49BG

Bottom Mounted / 2 Glass Door



TECHNICAL SPECIFICATIONS

Voltage/Frequency	115V/60Hz
Refrigerant	R290
Type of Defrost	Automatic
Interior Material	Stainless Steel
Exterior Material	Stainless Steel
Temperature Range °F	33 ~ 41°F
Compressor Power (HP)	1/2+
Nema Config.	NEMA5-15P



PRODUCT FEATURES



The compressor is mounted in the bottom for better heat evaporation.



Digital temperature controls with LED display for precise adjustment and automatic defrost.



Hinged glass doors, tempered glass, UV blocking.



R290 Natural Refrigerant promotes faster cool down and efficient energy consumption.



Epoxy coated wire shelves.



Stainless steel interior & exterior, sealed interior floors, and rounded cabinet corners for easy cleaning.



High quality coated stainless adjustable shelves prevent peel and rust.



Adjustable front locking casters.



HIGH QUALITY STAINLESS STEEL & ROBUST DESIGN

1-562-907-8090


Sales@chefaaa.com

www.ChefAAA.com


DETAILS & SPECIFICATIONS

KR-49BG

Front View

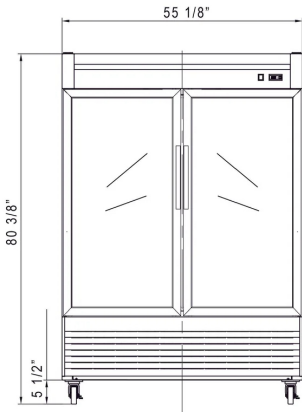

Side View



MODEL KR-49BG

Rated Voltage	115V
Rated Frequency	60Hz
Total Input Power	730W
Total Current	8.6A
Total Capacity	41.73 cu ft
Climatic Category	4-5
Protection Type	I
Design Pressure High Side	300 PSIG
Design Pressure Low Side	150 PSIG
Insulation Blowing Gas	C-Pentane
Refrigerant	R290/4.58 oz

MODEL	EXTERNAL DIMENSION WXDXH (INCHES)	PACKAGING DIMENSION WXDXH (INCHES)	PRODUCT NET WEIGHT	# OF SHELVES	40HQ CONTAINER CERT.
KR-49BG	55 1/8 x 34 x 80 3/8	57 1/8 x 35 x 82 3/8	595 lbs	8	21



AutoQuotes



115/60/1
NEMA-5-15P

1-562-907-8090

Sales@chefaaa.com

www.ChefAAA.com