


Marlow

BLACK MARLOW

Known world wide as 'blackMarlow', Marlow Abseil Rope is tried and tested, high quality rapelling rope used by forces around the world. Specifically designed for rapid descent from helicopters, rock faces and in urban warfare situations, the combination of special cover construction and low-stretch core ensures high performance and reliability. The high tenacity plaited cover also ensures comfortable handling but with excellent abrasion resistance and durability.

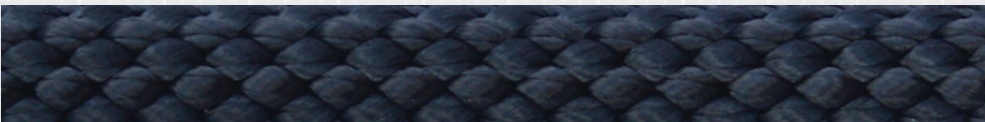

APPLICATIONS:	Abseiling, rapelling
CONSTRUCTION:	Multiple twisted cores
COVER MATERIAL:	16 plait Polyester
CORE MATERIAL:	Polyester
BENEFITS:	Good strength, excellent abrasion resistance, works well with ascenders and desenders, colour contrast core/cover

	9	11
diameter (mm)	9	11
weight (kg/100m)	6.7	9.54
colours	black	black, white
lengths (m)	50, 61, 100, 200, 220	50, 61, 100, 200, 220
construction	16 plait	16 plait
Av. breakload (kN)	20.3	30.8
av breakload with fig. 8 loop (kN)	-	19
core construction	polyester	polyester
cover construction	polyester	polyester
test standard	-	MR-10-81
termination options	knot, sewn eye	knot, sewn eye

Marlow Ropes Ltd
Ropemaker Park
Hailsham
East Sussex, BN27 3GU
England

Marlow Ropes, Inc.
Cordage Business Park
Plymouth
MA 02360
USA

www.marlowropes.com
UK: +44 (0) 1323 444 444
sales@marlowropes.com
US: +1 508 830 444
salesusa@marlowropes.com



Certification Number 315
ISO 9001

Disclaimer

Marlow Ropes Ltd endeavours to ensure that all products are manufactured to the highest standard, these guidelines are not intended and do not create any warranties, express or implied. Marlow Ropes Ltd expressly disclaims warranties or representations of any kind, express or implied, including the implied warranties of merchantability and fitness for a particular purpose. Marlow Ropes Ltd shall not be liable for any consequential, incidental or contingent damages whatsoever stemming from the use of these guidelines. Marlow Ropes Ltd has a policy of continual improvement which may result in specification and colour changes without prior notice.