

Phone 847-564-9016 Fax 847-564-9017 www.allgearinc.com





Arbor	1-35	Utility and Lineman	35-39
Adjustable Friction Saver	16	Dielectric Line	37
Adjustable Lanyards	18-20	Hand Lines	38
Arborist Climbing Lines	3-7	Poly Dac	38
Arborist Rigging Lines	8-10	Stringer Line	39
Carabiners	17	Swift Line	36,42
Chafe Sleeves	34-35	Tower and Rescue Lines	39
EZ Lanyards	20	Transformer Slings	37
Foot Ascenders	24	Utility Pulling Tape	36
Friction Hitches	21-22	Winch Lines	42
Knotless Rigging Kits	33		
Mechanical Advantage Rigging Kits	17	Construction	40-43
Pole Pruner Cords	23	Pole Saw Cord	23
Positioning Lanyard	16,20	Ratchet Straps	41
Rings	26	Shock Cords	40
Ring Slings	27-28	Swift Line HMPE	36
Rigging Prusik	23	Pulling Twine	36
Rigging Slings	30-31	Utility Line	38
Rope Bags	23	Weep Cord	43
Rope Chain Sling	31	hoop cold	15
Saddles	24	H.D. Marine	42-46
Shock Cords	40		
Speed Line Kits	13	Manila	46
Spliced and Sewn Eye Options	7	Marine Lines	42-46
Splicing and Fids	35	Poly Dac	45
Synthetic Cabling	34	Polypropylene	45
Throw Bags	15	Solid Braid	43
Throw Lines	14-15	Twisted Ropes	44-46
Tree Climbing Kits	25		
Winch Line	36	Training	47
Whoopie Slings	29	~	

On the cover: Our Staff ISA Certified Arborist is shown using a 5/8" Ring to Ring (*pg 26*) which will extend rope life, with a 1/2" Husky Bull Rope (*pg 8*) terminated with a sewn eye which has a double locking steel carabiner (*pg 17*) connected to three HMPE Loop Lines (*pg 32*) and is climbing on our Inferno 11.8 mm Climbing Rope (*pg 3*).

NOTICE: Three limbs are being lowered at once. One of the many benefits of a Knotless Rigging Kit (pg 33)





24-Strand Arborist Climbing Lines - 11.8mm

Excellent for SRS and MRS climbing 11.8mm 24-Strand Double Braid Polyester Cover, 16-Strand Braided Polyester Core with Neon Colored 3-Strand Twisted Core. Elongation 4.9% at 30% of Tensile Strength. Specific Gravity 1.38



6,700 lb Average Tensile. AG24SP118GOB InfernoTM



6,700 lb Average Tensile. AG24SP118PGG Mardi GrasTM



6,700 lb Average Tensile. AG24SP118BGG **Blue Craze II**TM



6,700 lb Average Tensile. AG24SP118ROG Cherry Bomb IITM


Phone 847•564•9016 Fax 847•564•9017 www.allgearinc.com

3



24-Strand Arborist Climbing Lines - 7/16" 11.2mm

Excellent for SRS and MRS Climbing. 7/16" or 11.2mm 24-Strand Double Braid with a Polyester Cover, a 16-Strand Braided Polyester Core surrounding a Neon Colored 3-Strand Twisted Core. Elongation 4.9% at 30% of Tensile Strength. Specific Gravity 1.38

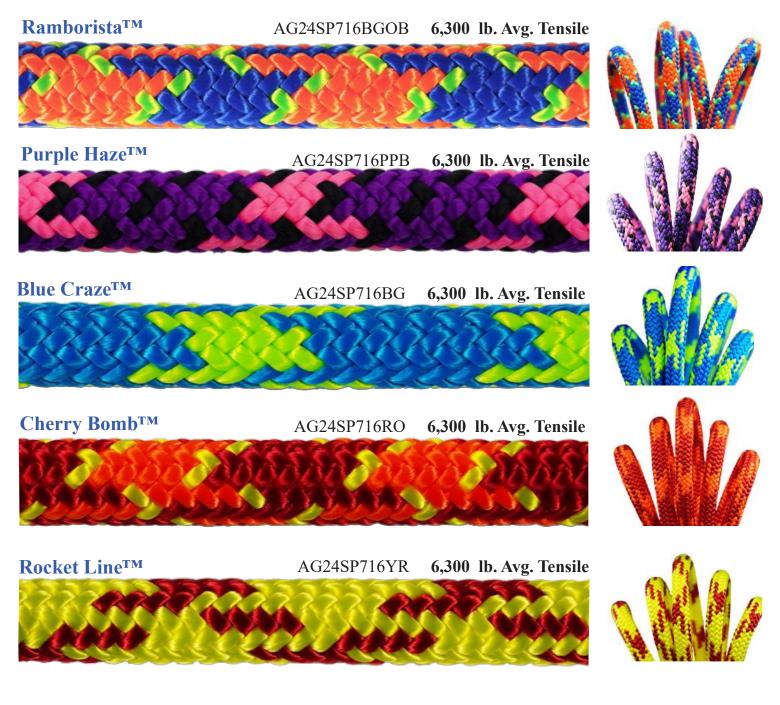



32-Strand Kernmantle Arborist Semi-Static Rappelling Lines - 7/16" = 11mm

8,800 Lb. Avg. Tensile. AGKM716RGY CrossfireTM


7/16 - 11mm 32-Strand Semi-Static Climbing Line. Polyester Jacket 8-Strand Nylon Parallel Core. Elongation 15% at 30% of Tensile Strength.



32-Strand Kernmantle Arborist Static Rescue and Rappelling Lines - 7/16" = 11mm

Finish LineTM

7/16" or 11mm 32-Strand Static Kernmantle Rescue and Rappeling Line. 32-Strand Polyester Jacket with 8-Strand Nylon Parallel Core. Low Stretch. Elongation: 3% at 30% Tensile Strength Specific Gravity: 1.38

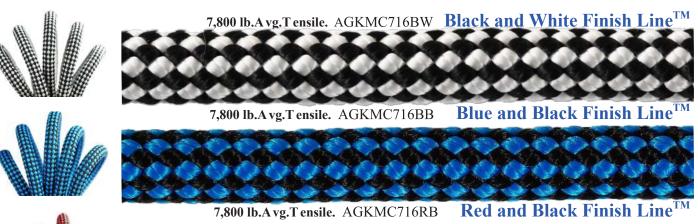



6,000 lb. Avg. Tensile. AGKM716BGY Tower LineTM

7/16 or 11mm 32-Strand Static Rescue and Rappelling Line. Polyester Jacket w/ 8-Strand Polyester Parallel Core. Low Stretch. Elongation 3% at 30% of Tensile Strength. Specific Gravity 1.38



Phone 847•564•9016

Fax 847•564•9017



16-Strand Arborist Climbing Lines - 1/2"

Optimized for MRS climbing.

1/2" 16-Strand Polyester Jacket with an 8-Strand Nylon Core. Braided Under Tension Elongation 3% at 30% of Tensile Strength. Specific Gravity 1.38

Bazooka AG16SP12BOY 9,200 lbs. Avg. Tensile






9,200 lbs. Avg. Tensile



SafetyliteTM AG16SP12S 9,200 lbs. Avg. Tensile





Optimized for MRS climbing.

1/2" 24-Strand Double Braid Polyester Jacket with 12-Strand Polyester Core. Braided Under Tension

Safetylite IITM AG24SP12S 7,800 lbs. Avg. Tensile





Phone 847•564•9016 Fax 847•564•9017 www.allgearinc.com









12-Strand Arborist Climbing Lines - 1/2"

7,300 lb. Avg. Tensile.

AG12SP12RW Forestry ProTM



1/2" or 12.7mm 12-Strand 100% Premium Polyester with 4-Strand 100% Polyester Parallel Core to keep the rope firm and round. Elongation 3% at 30% of Tensile Strength. Specific Gravity 1.38

7,300 lb. Avg. Tensile. AG12SP12G Forestry Pro GloTM



1/2" or 12.7mm 12-Strand 100% Premium Polyester with 4-Strand 100% Polyester Parallel Core to keep the rope firm and round. Elongation 3% at 30% of Tensile Strength. Specific Gravity 1.38

32-Strand Kernmantle Arborist Climbing Lines 1/2"

Tower LineTM

1/2" or 12.7mm 32-Strand Low Stretch Static Kernmantle Climbing Line. 32-Strand Polyester Jacket with an 8-Strand Polyester Parallel Core. Elongation 3% at 30% of Tensile Strength. Specific Gravity 1.38



8,200 lb. Avg. Tensile. Dark Blue Green and Yellow AGKM12DBGY Tower LineTM



8,200 lb. Avg. Tensile. Red Orange and Yellow AGKM12ROY Tower Line

Optional Sewn and Spliced Eyes



Phone 847•564•9016

Rope Bags

All Gear Rope Storage Bag can hold up 200' of climbing rope. Each bag comes with drawstring top closure and the top third of the bag is made of ripstop nylon and 2 webbing carry handles.



Features 4 velcro side pockets



www.allgearinc.com

Fax 847•564•9017



Arborist Rigging Lines

Double Braid HuskyB ull RopeTM

Our Husky Bull Rope[™] is constructed with a strong Double Braid Construction consisting of a Polyester Cover and a Nylon Core. Finished with our Husky Urethane Coating for the best Abrasion Resistance. **Requires a Pulley, Block, or Ring.**





Arborist Rigging Lines

Double Braid Husky Bull RopeTM

Double Braid Construction with a Polyester Cover and a Nylon Core. Finished with our Husky Urethane Coating. Elongation 7% at 30% of Tensile Strength. Specific Gravity 1.38



Husky Urethane[™] Coated 12-Strand Polyester with 4-Strand Polyester Parallel Core to keep the rope firm and round. 100% Premium Polyester. Excellent for natural crotch rigging. Elongation 3% at 30% of Tensile Strength. Specific Gravity 1.38

7,300 lb. Avg. Tensile. AG12SP12WR 1/2" Wonder RopeTM





Arborist Rigging Lines

Husky Coated 3-StrandTM

100% Premium 3-Strand Twisted Polyester with Color Coded Husky Urethane Coating for added abrasion resistance. **Excellent for natural crotch rigging.** Elongation 12% at 30% of Tensile Strength. Specific Gravity 1.38

1/2" Husky 3-StrandTM AG3STP12B 5,750 lb. Tensile. 5/8" Husky 3-StrandTM AG3STP58R 9,350 lb. Tensile. 3/4" Husky 3-StrandTM AG3STP34O 11,300 lb. Tensile.

Pro ForceTM HMPE Bull Rope

High Tenacity Double Braid Composite. Polyester Jacket w/ Ultra High Molecular Weight Polyethylene Core or HMPE and finished with our Husky Urethane[™] Coating for added abrasion resistance. **Do not shock load.** Elongation 1.2% at 30% of Tensile Strength. Specific Gravity 1.1

1/2" Pro ForceTM AGBRS12 18,500 lb. Avg. Tensile

9/16" Pro ForceTM AGBRS916 21,500 lb. Avg. Tensile

5/8" Pro ForceTM AGBRS58 31,000 lb. Avg. Tensile



Pro ForceTM Crane Slings

page 31

Phone 847•564•9016

Fax 847•564•9017



Arborist Hollow Braid RiggingT ool Lines



Multi Pro Husky-12[™] 12-Strand Hollow Braid 12-Strand 100% Polyester Double Carrier. Husky Urethane™ Coating. Color Coded. Elongation 2% at 30% of Tensile Strength. Specific Gravity 1.38

6,000 lb. Avg. Tensile. AG12SP38CAMO 3/8" Multi Pro Husky-12TM

AG12SP12MB 1/2" Multi Pro Husky-12TM 11,000 lb. Avg. Tensile.



AG12SP58MR 5/8" Multi Pro Husky-12TM 16,000 lb. Avg. Tensile.





21,000 lb. Avg. Tensile. AG12SP34MO 3/4" Multi Pro Husky-12TM



32,000 lb. Avg. Tensile. AG12SP78MG 7/8" Multi Pro Husky-12^{1M}



Phone 847•564•9016

Fax 847•564•9017



Super Swift Line™

100% HMPE 12-Strand Premium Winch and Chipper Line

Our Super Swift LineTM Premium Glide Pulling Line has excellent abrasion resistance and smooth glide when pulling. Fast and lightweight, an excellent *alternative to wire rope.* 4 Feet of Chafe Sleeve will protect the line from fair-lead abrasion and a reinforced eye with Chafe Sleeve for added durability. HMPE has excellent abrasion resistance. Elongation: 1% at 30% of Tensile Specific Gravity: 0.98 5/16" & 3/8" Yellow 1/2" & 3/4" Blue. Custom colors available. *It Floats!*

5/16" per foot AG12SS516 with eyes 5/16" x 100' AG12SS516100E2 5/16" x 150' AG12SS516150E2 5/16" x 200' AG12SS516200E2

3/8" per foot AG12SS38 with eyes 3/8" x 100' AG12SS38100E2 3/8" x 150' AG12SS38150E2 3/8" x 200' AG12SS38200E2

1/2" per foot AG12SS12 with eyes 1/2" x 100' AG12SS12100E2 1/2" x 150' AG12SS12100E2 1/2" x 200' AG12SS12200E2

5/8" per foot AG12SS58 with eyes 5/8" x 100' AG12SS58100E2 5/8" x 150' AG12SS58150E2 5/8" x 200' AG12SS58200E2

3/4" per foot AG12SS34 with eyes 3/4" x 100' AG12SS34100E2 3/4" x 150' AG12SS34150E2 3/4" x 200' AG12SS34200E2



* standard configuration with chafe sleeve and eye


Phone 847•564•9016

* shown with optional winch extension * shown with optional winch extension * shown with optional hook * shown with optional hook

Quick Connect[™] for a Strong METAL FREE connection

Replace your metal carabiner and save your chipper blades with our Quick Connect[™] soft shackle. Constructed from our 12-Strand HMPE Swift Line[™] with Chafe Sleeve.

AGQC51685/16" x 8"AGQC3883/8" x 8"AGSQC12121/2" x 12"AGSQC12321/2" x 32"





12

Fax 847•564•9017



Speed Line Kits

H.T. 1/2" HMPE Speed Line Kit

Our H.T. Speed Line Kit offers **16,000 lb. tensile** when used as a rigging loop or **5,000 lb. tensile** when used with the snap hook in a speed line (girth hitch) configuration. Designed to easily add or remove snap hooks. This kit comes with five 1/2" HMPE rigging loops in either 26" or 40" with Locking Aluminum Snaphooks connected by a Girth Hitch Loop. Comes with a Storage Rope Loop for easy saddle attachment.





Arborist Throw Lines

Throw Lines - 1.4mm - 2.2mm

Jet Set[™] 100% HMPE 8-Strand braided HMPE coated with Premium Husky Urethane[™] Coating to further enhance the glide and increase the abrasion resistance. International Safety Orange



Target Line II™100%Polyethylene Throw LineAll Gear's Heavy DutyPolyethylene Throw Line is made to be extremely slick. Target Line II™ has a striped patternand is braided firmly to avoid snagging and abrasion. 650 lbs. Average Tensile

5/32" x 200' AGPTL532200 5/32" x 1000' AGPTL5321000



Phone 847•564•9016 Fax 847•564•9017



AUL

Arborist Throw Line Accessories

Throw Bags

All Gear's Heavy Duty Throw Bags are designed with Rings large enough that they will not pass through our Ring to Ring Systems. Nylon Cordura exterior with weighted lead shot.

10 ozAGTB100Orange12 ozAGTB12YYellow14 ozAGTB14GGreen16ozAGTB16RRed

Bag weight embroidered on back of throw bag.

Throw Bag and Throw Line Combos

AGTB10&DPTL25180 AGTB10&PTL18200 AGTB10&TL175180 AGTB10&TL22180 AGTB12&DPTL175180 AGTB12&PTL18200 AGTB12&TL175180 AGTB12&TL22180 AGTB14&DPTL25180 AGTB14&PTL18200 AGTB14&TL175180 AGTB14&TL22180 AGTB16&DPTL25180 AGTB16&PTL18200 AGTB16&TL175180 AGTB16&TL22180

10oz Throw Bag and 2.5mm x 180' Bulls Eye 10 oz Throw Bag and 1/8" x 200' Target Line 10 oz Throw Bag and 1.75mm x 180' Jet Set 10 oz Throw Bag and 2.2mm x 180' Jet Set 12 oz Throw Bag and 2.5mm x 180' Bulls Eye 12 oz Throw Bag and 2.5mm x 200' Target Line 12 oz Throw Bag and 1.75mm x 180' Jet Set 12 oz Throw Bag and 2.2mm x 180' Jet Set 14 oz Throw Bag and 2.5mm x 180' Bulls Eye 14 oz Throw Bag and 1/8" x 200' Target Line 14 oz Throw Bag and 1.75mm x 180' Jet Set 14 oz Throw Bag and 2.2mm x 180' Jet Set 16 oz Throw Bag and 2.5mm x 180' Bulls Eye 16 oz Throw Bag and 1/8" x 200' Target Line 16 oz Throw Bag and 1.75mm x 180' Jet Set 16 oz Throw Bag and 2.2mm x 180' Jet Set



Diamond lineTM 100% Polyethylene Throw Line



Positioning Lanyard



1/2" x 10' or 1/2" x 12' 16-Strand Arborist Positioning Lanyard with an ANSI Aluminum Snap Hook, Rope Grab, Aluminum Carabiner and Chafe Sleeve.

Your choice of SafetyliteTM, NeoliteTM, or Bazooka

1/2" x 10' Safetylite
1/2" x 12' Safetylite
1/2" x 10' Neolite
1/2" x 12' Neolite
1/2" x 10' Bazooka
1/2" x 12' Bazooka

Any custom length available upon request.

Adjustable Cambium / Friction Saver



AGAFS24SP10

10' of our 24-strand line - Safetylite IITM, with a large aluminum ring on one end and a tight sewn eye on the other, coupled with a 3/8" x 30' Prusik and a small aluminum ring. Any custom length availble upon request.

Aluminum Rings are rated at 25kN

3/8" x 30" Prusik

Phone 847•564•9016

www.allgearinc.com

Meets or exceeds ANSI Z133-2017 requirements

Fax 847•564•9017



Carabiner



Phone 847•564•9016

Fax 847•564•9017



Adjustable Lanyards / Wire Core Flip Line





Micro Pulley Work Positioning Lanyard

All Gear's Micro Pulley Work Positioning Lanyard is a combination of a 16-Strand , 24-Strand or 32- Strand Polyester Climbing Line with a Micro Pulley , coupled with a 8mm or 10mm Friction Prusik with two Aluminum Carabiners



32-Strand Kernmantle 11mm x 10' AGMPPL1110 11mm x 15' AGMPPL1115 1/2"x 10' AGMPPL1210 1/2"x 15' AGMPPL1215 24- Strand 11.2mm 11.2mm x 10' AGMPPL11210 11.2mm x 15' AGMPPL11215

Easy to adjust while working at heights

24-Strand 11.8mm 11.8mm x 10' AGMPPL11810 11.8mm x 15' AGMPPL11815

16-Strand1/2"1/2"x 10'AGMPPL12101/2"x 15'AGMPPL1215

Meets ANSI Z133-2017

Requirement for all Climbiers to use a Lanyard as a secondary attachment

Phone 847•564•9016

Fax 847•564•9017

11.8mm x 10'



Working Positioning Lanyards

Our safety lanyard consists of climbing line with two sewn eyes, chafe sleeve, and a double-locking snap hook. Quality engineering and construction are guaranteed by excellent quality control. Available in 8', 10', 12', 16', 20', or your own custom length. Prusiks can be added to any lanyard.

32-Strand 7/16" 11mm Lanyards

Specify: Crossfire, Finish LineTM, Blue Finish LineTM, or Red Finish LineTM

7/16" x8 ' AGKMC7168-SHA 7/16" x1 0' AGKMC71610-SHA 7/16" x1 2' AGKMC71612-SHA 7/16" x 20' AGKMC71620-SHA



7/16" 32-Strand Lanyard in Blue and Black Finish LineTM

16-Strand 1/2" 12.7mm Lanyards

Specify: BazookaTM, NeoliteTM, or SafetyliteTM


1/2" x 8'AG16SP128-SH1/2" x 10'AG16SP1210-SH1/2" x 16'AG16SP1216-SH1/2" x 20'AG16SP1220-SH

1/2" 16-Strand Lanyard in BazookaTM

24-Strand 7/16" 11.2mm Lanyards

Specify: Purple Haze, RamboristaTM, Blue CrazeTM,

Cherry BombTM, or Rocket LineTM Lanyards - with Aluminum Snap $7/16'' \ge 8'$ AG24SP7168-SHA $7/16'' \ge 10'$ AG24SP71610-SHA $7/16'' \ge 12'$ AG24SP71612-SHA $7/16'' \ge 20'$ AG24SP71620-SHA



24-Strand 11.8mm Lanyards Specify: Inferno[™] (pictured), Marti Gras[™],

Lanyards - with Aluminum Snap

11.8mm x 8'

11.8mm x1 0'

11.8mm x1 2'

11.8mm x2 0'

Blue Craze IITM, or Cherry Bomb IITM

AG24SP1188-SHA

AG24SP11810-SHA

AG24SP11812-SHA

AG24SP11820-SHA



11.8mm 24-Strand Lanyard in Inferno

Phone 847•564•9016

Fax 847•564•9017



Adjustable EZ Lanyard Friction Prusiks

AGDBPTV8-26

AGDBPTV8-28

AGDBPTV8-26CB

AGDBPTV8-28CB AGDBPTV8-32 AGDBPTV8-32SHA AGDBPTV8-32CB

Friction 8TM and Friction 10TM are 8mm and 10mm Polyester and Technora Cover over a Vectran Braided Core. Excellent Heat Resistance when used as friction hitch. A Prusik Line with a Tropical Color configuration in 8mm or Carnival Color configuration in 10mm! Quality engineering and construction are guaranteed by premium fibers and excellent quality control. The Friction 8 and 10TM provides you with the ability to increase safety and a good firm construction keeps the rope round for high performance.

Friction 8TM Prusik

8mm x 26" 8mm x 26" 8mm x 26" 8mm x 28" 8mm x 28" 8mm x 28" 8mm x 32"	(Sewn Eyes) (Aluminum Snap) (Carabiner) (Sewn Eyes) (Aluminum Snap) (Carabiner) (Sewn Eyes) (Aluminum Snap)
8mm x 32" 8mm x 32"	(Aluminum Snap) (Carabiner)








Friction Hitches / Prusik Cords / Eye and Eye

Friction 8TM and Friction 10TM Eye and Eye Prusik for Climbing and Rigging

Eye to Eye Prusiks - 26", 28", 32" and 250' Double Braid 50% Polyester 50% Technora Cover over a 100% Vectran Core. Custom lengths available.

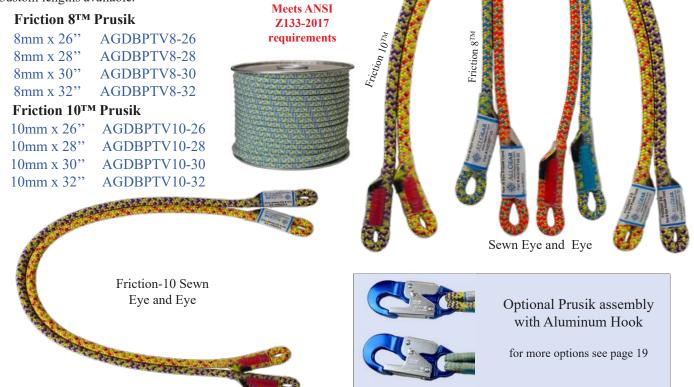

Prusik 5/16" or 8mm Prusik Cord AGKPC516

Kernmantle Polyester outer jacket with a braided Twaron core. Twaron has a 900° Farenheit charring point. Sold in either 250' or 500'. **5,400 lb. Avg. Tensile**.



AGKPC516250 5/16" x 250' AGKPC516500 5/16" x 500'

5/16" or 3/8" TVP Eye and Eye Prusik

TVP™ 16-Strand Composite . Any length Eye and Eye Prusik or 10' lengths are available. Water Resistant. Resists hat build-up.

Sewn Eyes 5/16" x 26" AG16STVP51626SE 5/16" x 32" AG16STVP51632SE		Average Tensile Strength 5/16" = 6,200 lbs 3/8" = 10,200 lbs
Bulk Reels		Spliced Eyes
5/16" x 250' AG12STVP516250		5/16" x 26" AG16STVP51626
3/8" X 250' AG12STVP38250		5/16" x 32" AG16STVP51632
Phone 847•564•9016	Fax 847•564•9017	www.allgearinc.com



Rigging Prusik




Husky-12 Rigging Prusik AG12SP3838E2

Husky 12-Strand[™] Premium Polyester Prusik Cord is a 12-Strand Polyester Rigging Prusik 3/8" x 38", or your own custom length. Coated in Husky Urethane[™] Coating. Neon Green color makes for Great Visibility.

Works with Mechanical Advantage Rigging Systems. 5,400 lb tensile.

Camo Multi Pro Prusik AG12

AG12SP3838CE2





Add a Rigging Carabiner (not for human life support) see page 17 AGCBOS Rigging Carabiner

Pole Pruner Cords



Solid Braid Multifilament Polypropylene hides the dirt well. Solid Braid Nylon is the most common and most durable Pole Pruner Cord:

Phone 847•564•9016	Fax 847•564•9017	www.allgearinc.com
--------------------	------------------	--------------------



Climbing Harnesses and Ascenders

Tree Access ANSI XT Tree Climbing Saddle and Harness Combo

A fully certified fall-arrest harness with all the functions, the Tree Access ANSI XT is the perfect harness for workers who want the maximum efficiency and performance for SRS and MRS Climbing maneuvers

Small - LargeAGLarge - XXLargeAG

AGTAXT-S-L AGAXT-L-XXL

Tree Access ANSI ST Tree Climbing Saddle

The perfect tree climbing sit harness for professionals looking for a versatile saddle with exceptional comfort. Works in combination with our harnesses and ascenders to offer endless possibilities.



Small - Large Large - XXLarge



AGTAST-S-L AGTAST-L-XXL



Tree Access SRT Chest Harness

A top-level accessory chest harness designed to deliver maximum efficiency and performance for SRS and MRS maneuvers. Designed to integrate seamlessly with our ANSI ST and 2021 version of the Tree Access EVO harness. It can also be rigged to other harnesses.

One Size AGTASRT-CT







Tree Climbing Kits

AGTCK-B

- 1. Adjustable Friction Saver 1/2" x 10'
- 2. 8mm Prusik Eye to Eye
- 3. Triple Action Aluminum Carabiners
- 4. Tree Access ANSI ST Climbing Saddle
- 5. Throw Bag
- 6. Target Line 1/8" x 200'
- 7. 16-Strand Lanyard 1/2" x 10'
- 8. Rope Bag
- 9. 1/2" x 150' 16-Strand Climbing Line

AGTCK-I

Adjustable Friction Saver 1/2" x 10'
 Positioning Lanyard 1/2" x 12'
 Triple Action Aluminum Carabiners
 8mm Prusik Eye to Eye
 Tree Access ANSI ST Climbing
 Saddle
 Throw Bags
 Bulls Eye Throw Line 2.5mm x 180'
 11.2mm x 200' 24-Strand Climbing
 Line with Spliced Eye
 Rope Bag





Phone 847•564•9016

Fax 847•564•9017

www.allgearinc.com

AGTCK-E

- 1. 11.2mm or 11.8mm x 15' Micro Pulley
- Work Positioning Lanyard
- 2. Adjustable Friction Saver 1/2" x 10'
- 3. Jet Set 1.75 x 180'
- 4. Tree Access ANSI ST Climbing Saddle
- 5. Tree Access SRT Chest Harness
- 6. Triple Action Aluminum Carabiners
- 7. Throw Bags
- 8. Rope Bag
- 9. 10mm Prusik Eye to Eye

10. 11.8mm x 200' Climbing Line with Spliced Eye

11. Turbofoot Ascender Right or Left



Low Friction Rings / Ring to Ring Slings

All Gear Low Friction Rigging Rings

All Gear Low Friction Rigging Rings are made from Top Grade American Aluminum with an Aircraft Quality Teflon Coating for Glide. Uniquely ours - most ring sizes are available in Blue or Red - Please specify color when ordering.

X86-28

LGEAR

- 3/4" AGLFR34-BLUE **NEW 2" BIG BLUE - AGLFR2-BLUE** 1 1/8" AGLFR118-BLUE
- 1 1/8" AGLFR118-RED
- 1 1/2" AGLFR112-BLUE
- 1 1/2" AGLFR112-RED



Multi Pro Husky 12-StrandTM Ring to Ring Slings

FRANKS FOR 25 48 Multi Pro Husky-12[™] Ring to Ring Slings are made from 12-Strand Multi colored Polyester Coated in All Gear's Husky Urethane[™] Coating and covered with Chafe Sleeve. 1/2" Sling has one 3/4" and one 1-1/8" ring. All other sizes have one 1-1/8" and one 1-1/2" ring.





Ring Slings

Husky 12-Strand[™] Polyester Soft Rig Slings

12-Strand Polyester Soft Rig Slings are used as a low stretch anchor point for Arborists and Utility contractors. All Gear's Polyester Soft Rig Slings have a 3' Ballistic Nylon Outer Jacket which slides to cover any of the Ten Rig Point Eyes for extended Life. Premium Husky Urethane[™] Coating provides excellent resistance to chemicals, sunlight, and abrasion. Custom lengths available.

			C
1"		1/2" X 4'	AGSRS12S-124
		1/2" X 8'	AGSRS12S-128
CONTRACT OF ALL OF A		5/8" X 5'	AGSRS12S-585
		5/8" X 10'	AGSRS12S-5810
		3/4" X 5'	AGSRS12S-345
		3/4" X 10'	AGSRS12S-3410
	VA 50	1" x 10'	AGSRS12S-110
Caue		Han	
	78 89 6	North	and the second s
		3/4"	
		5/1	ATT & CARDON
A CONTRACTOR OF	a 🎮	The second second	5103
L)			5/8"
a state of the sta	A	and a state of the	
		1/2"	

Multi Pro Husky 12-StrandTM Polyester Soft Rig Slings

12-Strand Multi Colored Polyester Soft Rig Slings are used as a low stretch anchor point for Arborists and Utility contractors. All Gear's Polyester Multi Pro[™] Soft Rig Slings have a 3' Ballistic Nylon Outer Jacket which slides to cover any of the Rig Point Eyes for Extended Life. Premium Clear Husky UrethaneTM Coating is applied to provide excellent resistance to chemicals, sunlight and abrasion. Custom lengths available

Working Load Limit (WL AverageT ensile x 90% x 20% 1/2" = 1,980 lbs 5/8'' = 2.880 lbs 3/4" = 3,780 lbs

1" = 7,200 lbs

1/2" X 4' AGSRS12S-124MB 1/2" X 8' AGSRS12S-128MB 5/8" X 5' AGSRS12S-585MR 5/8" X 10' AGSRS12S-5810MR 3/4" X 5' AGSRS12S-345MO 3/4" X 10' AGSRS12S-3410MO 7/8" X 5' AGSRS12S-785MG 7/8" X 10' AGSRS12S-7810MG Working Load Limit (WLL) 7/8" Average Tensile x 90% x 20% 1/2" = 1,980 lbs 5/8'' = 2.880 lbs 3/43/4" = 3,780 lbs 5/8" 7/8" = 5,760 lbs Phone 847•564•9016 Fax 847•564•9017 www.allgearinc.com



Ring Slings

Ring to Ring Sling A Medium or Small Ring and a Large Ring to Ring Slings are made of 12-Strand Polyester coated in All Gear's Husky UrethaneTM Coating and covered with Chafe Sleeve. 1/2" x 30" has a 3/4" Low Friction Ring and a 1-1/8" Low Friction Ring installed with a Locking Brummel Splices, 5/8" x 40" and the 3/4" x 50" have a 1-1/8" Low Friction Ring and a 1-1/2" Low Friction Ring installed with Locking Brummel Splices.

1/2"	х	30"	AG12SP12RR-30
5/8"	x	40"	AG12SP58RR-40
3/4"	X	50"	AG12SP34RR-50

Working Load Limit (WLL) AverageT ensile x 90% x 20% 1/2" = 1,980 lbs

5/8" = 2,880 lbs 3/4" = 3,780 lbs



Ring to Ring Sling with Double Head

Double Headed Ring-to-Ring Slings are made of 12-Strand Polyester or 12-Strand Multi ProTM covered with Chafe Sleeve for added durability. 3/4" x 5' has two 1-1/8" Low Friction Rings and one 1-1/2" Low Friction Ring installed with a Locking Brummel Splice. Color coded with two different colored rings to determine each side for easy retrieval. *Can be custom ordered in any length.* Working Load Limit (WLL) 5/8" 2,880 lbs 3/4" 3,780 lbs.

5/8" x (specify) AG12SP58RR-DH

Yellow 12-Strand with one 1-1/2 "Blue Ring and two 1-1/8" Red Rings 5/8" x (specify) AG12SP58MORR-DH Multi Pro Husky-12[™] with one 1-1/2 "Blue Ring and two 1-1/8" Red Rings 3/4" x (specify) AG12SP34RR-DH Green 12-Strand with one 1-1/2" Blue Ring and two 1-1/8" Red Rings 3/4" x (specify) AG12SP34MORR-DH Multi Pro Husky-12[™] with one 1-1/2" Blue Ring and two 1-1/8" Red Rings

Redirect Sling

3/8" x 4'

1/2" x 5'

5/8" x 5'

3/4" x 6'

12-Strand Polyester Redirect Slings are used as a low stretch anchor point for arborists and utility contractors. All Gear's Polyester Redirect Slings have a Ballistic Nylon Outer Jacket at the Eye and Body for extended life. Premium Husky Urethane[™] Coating is applied to provide excellent resistance to chemicals, sunlight, and abrasion.

n Husky Urethane[™] Coating is applied to provide to chemicals, sunlight, and abrasion. Morking Load Limit (WLL) AG12SPRS384 AG12SPRS125 AG12SPRS585 AG12SPRS346 3/8" = 1,830 lbs 1/2" = 1,980 lbs 5/8" = 2,880 lbs 3/4" = 3,780 lbs $3/4" \times 6"$

Phone 847•564•9016

Fax 847•564•9017

www.allgearinc.com

1/2"x 5

3/8"x 4'

5/8"x 5



Whoopie Slings

Single Head Whoopie Sling

Husky 12-StrandTM Adjustable Polyester Slings are used as a low strench anchor point for arborists and as a lifting tool for contractors. All Gear, Inc Adjustable Polyester Slings have a Ballistic Nylon Outer Jacket at the Eye for Extended life. Premium Husky UrethaneTM Coating is applied to provide excellent resistance to chemicals, sunlight, and abrasion.





Rigging Slings

Husky 12-StrandTM Spliced Eye Slings Custom Lengths Available

1/2" x 10'	AG12SPES1210
1/2" x 15'	AG12SPES1215
5/8" x 12'	AG12SPES5812
5/8" x 18'	AG12SPES5818
3/4" x 15'	AG12SPES3415
3/4" x 25'	AG12SPES3425

Working Load Limit (WLL)

Average 7	Fensil	e x 90% x 20%
1/2"	=	1,485 lbs.
5/8"	=	2,160 lbs.

,835 lbs.

Husky 12-StrandTM Double Head Eye Sling

Double Head Eye Sling are constructed of 12-Strand Polyester (shown) or 12-Strand Multi Pro [™], coated in All Gear's Husky Urethane[™] Coating, and Covered with a Heavy Duty Nylon Chafe Sleeve. This sling is constructed using two 1-1/8" Low Friction Rings Installed with a Locking Brummel Splice. *Single Head also Available.*



5/8" x 12'AG12SPES5812DMR5/8" x 16'AG12SPES5816DMR3/4" x 12'AG12SPES3412DLR3/4" x 16'AG12SPES3416DLR3/4" x 20'AG12SPES3420DLR

Working Load Limit (WLL) Average Tensile x 90% x 20% 5/8" = 2,880 lbs 3/4" = 3,780 lbs



Husky-12[™] Loopie Sling

12-Strand Polyester Adjustable Loop. The 1/2" loop is adjustable from 2-5 feet. The 5/8" loop is adjustable from 3-8 feet. The 3/4" loop is adjustable from 3-9 feet. Husky-12[™] Adjustable Loops have a Ballistic Nylon Chafe Sleeve that can be slid to any wear points for abrasion protection. **Working Load Limit (WLL)**

1/2"2-5'AG12SPLS122-5Red5/8"3-8'AG12SPLS583-8Yellow3/4"3-9'AG12SPLS343-9Green

Phone 847•564•9016

Working Load Limit (WLL) 1.5 x Average Tensile x 90% x 15% 1/2" = 2,227 lbs 5/8" = 3,240 lbs 3/4" = 4,252 lbs


Fax 847•564•9017



Rigging Slings

Pro Force[™] Crane Sling

The All Gear Pro Force[™] Crane Slings are made from our Pro Force[™] Bull Rope which has a Polyester Cover and an HMPE (Ultra High Molecular Weight Polyethylene) Core that gives this sling exceptional tensile strength. It is available in 1/2" Purple, 9/16" Neon Green, and 5/8" Light Blue. It has a 12" Spliced Eye with protective Chafe Sleeve for abrasion resistance. Usually used in

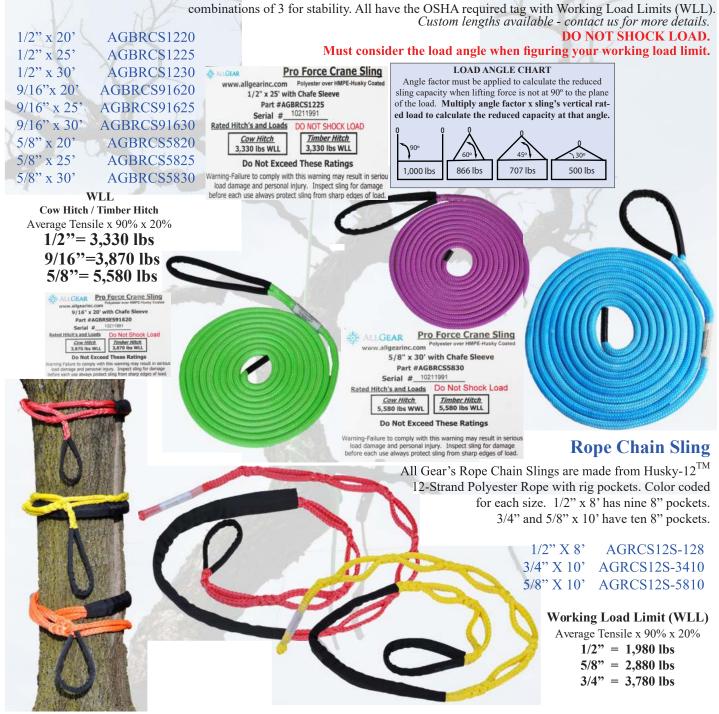

Phone 847•564•9016 Fax 847•564•9017



Rigging Loops and Slings


H.T. Super Loops 1/2" HMPE[®] Rigging Loops.

32-Strand 100% HMPE Rigging Loops for Rigging Stepping, Balancing, and Holding. Now with Chafe Sleeve. Use these with your Husky Bull Rope[™] for Knotless Rigging.

Must consider the choke angle effect when figuring your working load limit.

16,000 lbs. Average Tensile Strength.

AG32SS1224	1/2" x 24"	Yellow
AG32SS1236	1/2" x 36"	Red
AG32SS1248	1/2" x 48"	Blue



Angles of Choke	Sling Rated Load
120 - 180	75%
90 - 119	65%
60 - 89	55%
30 - 59	40%

AGBRHL3840 AGBRHL3860 AGBRHL71640 AGBRHL71660

Husky Rigging Loops[™]

3/8" and 7/16" Double Braid Composite Rigging Loops for Knotless Rigging and Balancing your Limbs. Use these in Combination with your Husky Bull RopeTM for Rigging. 3/8" x 40" AGBRHL3840

Average Tensile Strength	
3/8" = 8,000 lbs	
7/16" = 10,000 lbs	

0.0 11 10
3/8" x 60"
7/16" x 40"
7/16" x 60"

1" Nylon Work Loops

High Strength 1" tubular nylon webbing used for light rigging, anchor slings, speedline systems, hauling brush, to secure ladders and equipment, ect.. Available in 26", 36", 40", and 48" Average Tensile 7,000 lbs and 10,000 lbs. in Basket.

1" x 26"	AGNWL26	Blue
1" x 36"	AGNWL36	Orange
1" x 40"	AGNWL40	Red
1" x 48"	AGNWL48	Neon Green



Polyester Round Sling

Polyester Round Slings are avilable in appoximate diameters of 5/8" Regular Duty, 7/8" Heavy Duty, and 1-1/8" Extra Heavy Duty. Polyester Round Slings are the most durable Lifting Slings.





5/8"	AGPRS58	Purple
7/8"	AGPRS78	Green
1 1/8"	AGPRS118	Yellow

Phone 847•564•9016

Fax 847.564.9017 www.allgearinc.com



Do You Know How Efficient Knotless Rigging Is?

Rigging Configuration A

AGKRCA

1/2" Forestry Pro x 150' AG12SP12150RW (pg.9) Excellent for Natural Crotch Rigging

> Steel Pear Shaped Rigging Carabiner AGCBPSR (pg. 17)

Husky Rigging Loops 3/8" x 40" AGBRHL3840 (pg. 32)



Forestry Pro is an excellent choice for natural crotch rigging (without a pulley)

- Great System for Municipalities
- Loops make great redirects
- When loops are choked, they are choked at different parts of the rope, each use extending thier longevity

Rigging Configuration B AGKRCB

150' 1/2" Husky Bull Rope™ AGBR12150 (pg.8) Excellent for Ring to Ring Rigging

Steel Pear Shaped Rigging Carabiner Shown on the left AGCBPSR

(pg. 17)

High Tenacity HMPE Loops 1/2" x 40" AG32SS1240 (pg. 32) 5/8" Multi Pro Ring to Ring Sling AG12SP58MRRR-40 (pg. 28) - on left







Husky Bull Rope[™] must be used in combination with a ringed product or pulley (Not for natural crotch rigging)

Phone 847•564•9016

AGCBPSR

Steel Pear Shaped

Rigging Carabiner

(not for human life support)

Fax 847•564•9017



Synthetic Cabling / Chafe Sleeve

Branch Saver

Branch Saver[™] is an adjustable system for supporting limbs. Ice storms, wind storms and hurricanes can do damage to the earths most valuable trees. Broken Limbs Don't Always Require Removal. Often a Branch is Capable of Healing with support from a Branch SaverTM systems.



Easy to Splice in the field. Very quick to adjust the length.



3/8" X 300' AGHBP38300B 1/2" X 300' AGHBP12300B 3/4" X 300' AGHBP34300B

Learn more about splicing Branch Saver at www.allgearinc.com/videos.html

For Split Trees or Poles Add a 2" x 10' Pole Strap AGRS210EL Long Handle Endless Ratchet Strap will hold them together.	
Yellow.	
 A	$(\mathbf{C}_{-} \mathbf{I}_{+} \mathbf{I}_{+} \mathbf{I}_{+} \mathbf{O}_{+} \mathbf{P}_{+} \mathbf{P}_{+} \mathbf{I}_{+})$

Heavy Duty Chafe Sleeve

Our Heavy Duty Polyester Cafe Sleeve will provide excellent protection for your tree in a Branch Saver System*. It can also be used as an excellent rope protector for climbers and rescue workers.

Easy to setup with a slip knot.

3/4" I.D.* x 30' Rolls AGCSHD34 1 1/2" I.D.* x 30' Rolls AGCSHD112 I.D.* = Inside Diameter



Phone 847•564•9016 Fax 847•564•9017 www.allgearinc.com

Branch Saver Kits

AGBSK12CS1

1/2" X 300' Branch Saver + 1" x 30" Chafe Sleeve AGBSK12HD34 1/2" X 300' Branch Saver + 3/4" x 30" Heavy Duty Chafe Sleeve AGBSK34CS1

3/4" X 300' Branch Saver + 1" x 30" Chafe Sleeve

AGBSK34HD112

3/4" X 300' Branch Saver + 1 1/2" x 30" Heavy Duty Chafe Sleeve Average Tensile Strength 10,000 lbs. (Sold 10 per Pack)



Splicing and Fids

Chafe Sleeve

Nylon Chafe Sleeve is excellent for protection of spliced eyes or to help protect your rope at any point. It works as a fixed or movable/ sliding protection product. Available in 50 ft. lengths or 300' rolls.

1/2" I.D.* x 50' or 300'	AGCS12ID
1" I.D.* x 50' or 300'	AGCS1-ID
1 1/4" I.D.* x 50' or 300'	AGCS114-ID
1 1/3" I.D.* x 50' or 300'	AGCS113-ID
1 1/2" I.D.* x 50' or 300'	AGCS112-ID
1 3/4" I.D.* x 50' or 300'	AGC134ID
2" I.D.* x 50' or 300'	AGCS2-ID

I.D.* = Inside Diameter

For more splicing instructions see our website www.allgearinc.com/arboristgear/SpliceBranchSaver.pdf



H.D. Piano Wire for Splicing

Pwire10 to100

The finest grade steel of precise chemical analysis, #26 or .063 in size. Exceedingly uniform in thickness and roundness makes

it the finest available.

Inside Diameter 2" 1 1/2" 1" 1/2"

Professional Selma Splicing Kit PSPLICINGKIT

A great add on to your Branch Saver Kit

Reusable tube of 5 fids and instructions to splice your own ropes. Splice Hollow Braided, 3-Strand Twisted, and Double Braided ropes.

Polyester Waxed Twine AGPWT8P1200

Polyester Waxed Twine adds the ultimate finishing touch to your splice. 1,200' Roll 8-Ply.





Phone 847•564•9016

Fax 847•564•9017



Utility and Lineman

Super Swift Line[™] 100% HMPE

12-Strand HMPE has excellent abrasion resistance. Spliced eyes available. Minimum elongation - at 30% of tensile is only 1%. 5/16"- 3/8" Yellow 1/2" - 3/4" Blue. (Specify Length - this product is sold by the foot) It Floats!

For more Swift Line Options, see page 12

	-	Average Tensile Strength
5/16"	AG12SS516	5/16'' = 15,300 lbs
3/8"	AG12SS38	·
7/16"	AG12SS716	3/8'' = 19,000 lbs
1/2"	AG12SS110	7/16" = 22,300 lbs
		1/2" = 38,000 lbs
5/8"	AG12SS58	5/8'' = 51,100 lbs
3/4"	AG12SS34	3/4" = 75,000 lbs
		3/4 - 73,000108



Double Braid Composite High Force Pulling Line

Double Braid Composite 1/4" to 1 1/8" High Force Pulling Line with 6" hand spliced twine stitched eye on each end. The braid is a combination of Polyester and Nylon. *(Specify Length 600', or 1,200' or custom length)*

1/4"	AGDBC14
3/8"	AGDBC38
1/2"	AGDBC12
9/16"	AGDBC916
5/8"	AGDBC58
3/4"	AGDBC34
7/8"	AGDBC78
1"	AGDBC1
1 1/8"	AGDBC118


Average Tensile Strength


1/4" = 2,800 lbs
3/8" = 5,000 lbs
1/2" = 10,500 lbs
9/16'' = 14,000 lbs
5/8" = 19,500 lbs
3/4" = 23,000 lb
7/8" = 32,000 lbs
1'' = 38,000 lbs.
$1 \ 1/8$ " = 53,300 lbs.

3- Strand Twisted Polyester

3-Strand Twisted Polyester 3/8" to 3/4" 3-Strand Twisted Polyester with 6" eyes on each end. 150', 200', and 600' lengths available.

Average Tensile Strength







Polyester Pulling Tape (not pictured)

Polyester Pull Tape 1,250 lbs., 1,800 lbs., and 2,500 lbs. Average Tensile. Marked sequentially every foot for measurement. 3,000' and 5,000' length spools are available.

Polypropylene Pulling Twine AGPPPL6500B

Pull Twine 6,500' Polypropylene Pulling Twine, White with a Blue Tracer. Private Label and Custom Colors Available. 48 pc. minimum order. 210 - 230 lbs. Average Tensile.





Phone 847•564•9016 Fax 847•564•9017 www.allgearinc.com



Utility and Lineman

Lineman Tools and Rope 12- Strand Adjustable Polyester Transformer Slings

Working Basket Choker Load Limit Rating Rating WLL WLL x 2 WLL x 809	3/8" x 24-72 AGTS38-24-72G
x80% x 20%	[%] 1/2" x 24-50 AGTS12-24-50R 1/2" x 24-72 AGTS12-24-72R
3/8" 960 lbs 1,920 lbs 768 lbs	s 5/8" x 24-50 AGTS58-24-50Y
1/2" 1,760 lbs 3,520 lbs 1,408 lbs 5/8" 2,560 lbs 5,120 lbs 2,048 lbs	5/8″ x 24-72 AG1 S58-24-72 Y
3/4" 3,360 lbs 6,720 lbs 2,688 lbs	$2/4? = 24.50 \times C' E 2.4.24.50C$

12-Strand Adjustable Polyester Transformer Slings are used as a low stretch lifting tool for contractors. All Gear, Inc. Adjustable Polyester Transformer Slings have a Ballistic Nylon Chafe Sleeve at the 3 Critical Wear Points for Extended Life. Premium Husky Urethane[™] Coating is applied to provide excellent resistance to chemicals, sunlight, and abrasion.

12-Strand Low-Conduct Polyolefin Dielectric Line

3/8" x 600'

7/16" x 600'



1/2" x 600'	AG12SDE12600
5/8" x 600'	AG12SDE58600

AG12SDE38600

AG12SDE716600

3/8" to 5/8" 12-Strand Polyolefin Dielectric Line is great for minimal electrical conductivity. 100% polyolefin high tenacity copolymer insures high strength. 20% Stronger than standard yellow polypropylene lines. All diameters are available in custom lengths.

Average Tensile Strength

3/8" = 3,500 lbs 7/16" = 4,400 lbs 1/2" = 6,000 lbs 5/8" = 9,900 lbs

Husky Utility[™] Double Braid Winch Lines

		v v	
1/2" AGDBC12	Average Tensile Strength	Uncoated with	
3/4" AGDBC34	1/2" = 10,500 lbs	6" eyes and	COLOREFICE A
7/8" AGDBC78	3/4" = 23,000 lbs	Chafe Sleeve	
1" AGDBC1	7/8" = 32,000 lbs	CANII	
1 1/8" AGDBP118	1'' = 34,200 lbs	1013	
1 1/4" AGDBP114	1 1/8" = 47,970 lbs		
Specify length	1 1/4" = 53,000 lbs		
Husky Utility™ Double Bra	aid Winch Lines are excellent for use	on bucket trucks. They can also be	
used as tow lines. Lines one inch or less are constructed of a Polyester Cover over a Nylon Core.			

used as tow lines. Lines one inch or less are constructed of a Polyester Cover over a Nylon Core. Diameters over one inch are Polyester over Polyester. Husky Urenthane[™] Coating is available upon request. Eyes are also available with or without Chafe Sleeve. Many sizes of Galvanized Thimbles

Optional Thimble

Phone 847•564•9016

Fax 847•564•9017



Utility and Lineman Handline

Handline Pro

3/8"	AG12SC38SC	
1/2"	AG12SC12SC	
5/8"	AG12SC58SC	
3/4"	AG12SC34SC	
(Specify length)		



12-Strand Polyester over Polyolefin in each strand in a hollow braid construction. Polyolefin keeps the center dry. Polyester veneered for durability. Polyester over Polyolefin coupled with the hollow construction make it a very durable light weight rope. 25% stronger than yellow polypropylene lines. Available in special lengths.

> Average Tensile Strength 3/8" =5,400 lbs 1/2" = 9,300 lbs 5/8" = 14,000 lbs 3/4" = 17,000 lbs

3-Strand Twisted Poly Dac Handline



1/4" AGPD14
3/8" AGPD38
1/2" AGPD12
5/8" AGPD58
3/4" AGPD34
1" AGPD1
600'Lengths

Available in 1/4" - 1" diameters, this 3-Strand Twisted Composite is made of High Strength Polyester on the outside of each strand, and Light Weight White Polypropylene on the inside. Excellent for general purpose, Roofing Anchor Lines, Industrial Lifting, and replacing any polypropylene twisted lines. Available in White with a Green Tracer. Hold Knots well.

Minimum Break Strength

1/4" = 1,130 lbs. 3/8" = 5,300 lbs. 1/2" = 5,500 lbs. 5/8" = 7,400 lbs. 3/4" = 10,192 lbs. 1" = 17,000 lbs.

High Strength 3-Strand Twisted Composite Handline



3-strand twisted high strength composite bull rope, 100% plied polyester jacket insures durability and the high strength co-polymer core gives you excellent break strength. 20% stronger than standard poly dac lines.

Average Tensile	1/2" x 600'	AG3STHSC12600
Strength	5/8" x 600'	AG3STHSC58600
1/2" = 5,590 lbs	7/8" x 600'	AG3STHSC78600
5/8'' = 10,450 lbs	1 1/2" x 600'	AG3STHSC112600
7/8" = 18,910 lbs	2" x 600'	AG3STHSC2600
$1 \ 1/2" = 48,025 \ \text{lbs}$	2 A 000 A	10000111002000
2" = 81,865 lbs		

Phone 847•564•9016 Fax 847•564•9017



Utility and Lineman Tools and Rope

7/16" and 1/2"T ower Line Kernmantle

Tower Line is a 32-Strand Polyester Kernmantle Climbing line. A Firm construction and straight core makes this rope great for rapelling and tower work with blocks. Bright Tower Line provides you with the ability to increase safety, and the 32-Strand Polyester Cover keeps the line very durable for high performance.

Specify Length 120', 150', 200', 600' Custom lengths available.

Average Tensile Strength

7/16" = 6,000 lb 1/2" = 8,200 lb

AGKM716BGY

7/16" Blue, Green, Yellow





Phone 847•564•9016

Hollow Braid Polypropylene Stringer Line

12-Strand Hollow Braid Polypropylene is used as a lightweight pulling line. It is great as a Crowd Barrier Rope. Easy to Splice, and it Floats! Color is Yellow.

Average Tensile Strength

1/4" = 990 lbs	1/4" x 1000'	AGHBPP141000
3/8" = 2,100 lbs	3/8" x 1000'	AGHBPP381000
1/2" = 2,675 lbs	1/2" x 1000'	AGHBPP121000

Fax 847•564•9017



Shock Cords / Tie Downs

1/2" Elastic Shock Cord w/ Plastic Coated Heavy Duty "J" Hooks

1/2" x 12" AGCS12 1/2" x 18" AGCS18 1/2" x 24" AGCS24 1/2" x 36" AGCS36 1/2" x 40" AGCS40 1/2" x 48" AGCS48 1/2" x 60" AGCS60 1/2" x 72" AGCS72

1/2" Diameter x 12", 18", 24", 36", 40", 48", 60" and 72" in Length. Red w/ Black Hooks. Heavy duty red shock cord assemblies. Warning tags attached to each unit.

(25 per pack)

3/8" Elastic Shock Cord w/ Plastic Coated Heavy Duty "J" Hooks

3/8" x 36" AGSC3836 3/8" x 24" AGSC3824

3/8" Diameter x 24" and 36". Blue & Neon Green w/ Black Hook. Heavy duty Blue & Neon Green shock cord assemblies. Warning tags attached to each unit.

(25 per pack)

Rubber Tarp Tie Down-EPDM

10" AGRTD10 12" AGRTD12 21" AGRTD21 31" AGRTD31 41" AGRTD41

10", 15", 21", 31", and 41" Premium Quality EPDM Heavy Duty Rubber Tie Downs

(50 per pack)

Ratchet Straps

1" x 16" Endless Strap w/ Cam Buckle

1" X 16' **AGCB114**

1" x 16" Endless Strap w/ a Cam Buckle. 500 lbs. Breaking Strength and a 134 lbs. Working Load Limit. The Strap is endless w/ a Cam Buckle. (Sold 10 per Pack)



Phone 847•564•9016 Fax 847•564•9017









Ratchet Straps / Utility Hanks











1" x 16' Ratchet Strap w/ "S" Hooks AGRS116SH

1" x 16' Strandard Ratchet Strap. 2,500 lb. Breaking Strength and a 833 lb. Working Load Limit. The Strap has a Standard Ratchet and Large Vinyl Coated S-Hook.

Average Tensile Strength 3,000 lbs. (Sold 6 per pack)

1" x 16' Ratchet Strap w/ Hooks and Floating "D" Ring AGRS116HD

1" x 16' Heavy Duty Ratchet Strap. 3,000 lbs Breaking Strength and a 1,000 lbs Working Load Limit. The Strap has a Full Handled Ratchet and Wire Hooks with Floating D Rings.

Average Tensile Strength 3,000 lbs. (Sold 20 per Pack)

2" x 30' Rachet Straps w/ Wire Hooks AGRS230WHL

Heavy Duty Resin Coated Polyester Ratchet Straps with Wire Hooks. 10,000 lbs. Break Strength and 3,334 lbs. Working Load.

Special Sizes available upon request.

Average Tensile Strength 10,000 lbs.

2" x 30' Ratchet Straps w/ Flat Hooks

2" x 30'

3" X 30'

4" X 30'

Heavy Duty Resin Coated Polyester Ratchet Straps with
Flat Hooks. Break Strengths range from 5,000 lbs. to
20,000 lbs. 3" x 27' or 30'.
Average Tensile Strength 10,000 lbs. 4" widths availbe

upon request. (Sold 6 per pack)

2" x 10' Pole Strap AGRS210EL

Long Handle Endless Ratchet Strap for storm damaged tree stability. Helps close the gap in split tree repair. *(Sold 10 per Pack)*

Braided Utility Hanks

AGRS230FHL

AGRS330FHL

AGRS3430FHL

3/16" x 100	' AGUH316100
1/4" x 100"	AGUH14100
3/8" x 50'	AGUH3850
1/2" x 50'	AGUH1250
1/2" x 100'	AGUH12100
5/8" x 100'	AGUH58100

Braided Utility Hanks 3/16" to 5/8" x 50 ft. and 100 ft. length Braided Utility Hanks. Designed to be used as a utility line. Not for life support. A Braided Poly Jacket with a Solid Straight Poly Core. **Great Tie Down Line!**

Average Tensile Strength $3/16 = 300 \text{ lbs} \quad 1/4" = 600 \text{ lbs} \quad 3/8" = 1,200 \text{ lbs} \\ 1/2" = 3,000 \text{ lbs} \quad 5/8" = 7,000 \text{ lbs}$



Phone 847•564•9016

Fax 847•564•9017



Construction

Super Swift Line Winch and Chipper Line 100% HMPE

Premium Winch Line, 12-Strand HMPE with Husky Urethane[™] Coating. Easy to splice in the field. Custom colors available. Add eyes to any length. *It Floats!*

5/16"	AG12SS516
3/8"	AG12SS38
7/16"	AG12SS716
1/2"	AG12SS12
5/8"	AG12SS58
3/4"	AG12SS34

Specify Length 300', 600' 1,200' custom lengths available





Average Tensile Strength

5/16'' = 15,300 lbs 3/8'' = 19,000 lbs 7/16'' = 22,300 lbs 1/2'' = 38,000 lbs 5/8'' = 51,100 lbs 3/4'' = 75,000 lbs

Twisted Nylon SeineT wine

Nylon Seine Twine

Mason Line Excellent for Mason Line, Chalk Line, Netting Line, Plumb Line and Recreational Line. Available in White, Yellow, Neon Yellow, Neon Pink, Neon Green, Neon Orange, Dark Green, and Gold.

	Braided Nylon Seine Twine	
	#18 x 125' AGBNST18125 #18 x 250' AGBNST18250	
	#18 x 250 AGBNST18250 #18 x 500' AGBNST18500	
	#18 x 1000' AGBNST181000	#18 x 100' AGNST18100 #18 x 275' AGNST18275
		#18 x 550' AGNST18550 #18 x 1090' AGNST181090
Phone 847•56	64•9016 Fax 847•564•	9017 www.allgearinc.com



Construction

Twisted and Braided Rope

Solid Braided CottonW eeping Cord

#7 or 7/32" through #16 or 1/2" Solid Braided Cotton. Made from 100% Cotton (No Polypropylene core). Primarily used as Weeping Cord for contractors. Excellent water absorption to wick out the water behind brick or block. All diameters are available in 100' lengths and are packaged 12 to a case. Each Hank is individually shrink wrapped. Please contact us for special requests or Private Labeling.

#7 or 7/32" x 100'	AGSBC732100	Average Tensile Strength
#8 or 1/4" x 100'	AGSBC14100	#7 = 340 lbs
#10 or 5/16" x 100'	AGSBC516100	#8 = 750 lbs
#12 or 3/8" x 100'	AGSBC38100	#10 = 1,200 lbs
#16 or 1/2" x 100'	AGSBC12100	#12 = 1,475 lbs
		#16 = 1,700 lbs



Solid Braid Nylon

Solid Braid is one solid braided unit. Made of 100% Nylon. Very firm construction for starter cord or any other Pull Line. Excellent for general purpose, tie downs, and replacing any type of twisted lines. Holds knots well. Available in White or White with a Green Tracer.

3/16" x 1000'	AGSBN3161000	
1/4" x 1000'	AGSBN141000	Average Tensile Strength
5/16" x 1000'	AGSBN5161000	3/16" = 800 lbs
3/8" x 500'	AGSBN38500	1/4" = 1,240 lbs
3/8" x 1000'	AGSBN381000	5/16" = 1,931 lbs
1/2" x 500'	AGSBN12500	3/8" = 2,475 lbs
1/2" x 1000'	AGSBN121000	1/2" = 3,960 lbs



AG3STN12B 1/2" 3-Strand Twisted Nylon Black

1/2" 3-Strand Twisted Nylon. High Strength and Good Elasticity. Excellent for general purpose, Anchor Lines, Dock Lines, and replacing any polypropylene twisted lines. Holds knots well. Black. Other diameters available upon request.

See Page 41

See Page 45 for sizes and SKUS



Phone 847•564•9016

Fax 847•564•9017

www.allgearinc.com

Braided Utility Hanks



Heavy Duty Marine

Twisted Rope

High Strength 3-Strand Twisted Composite



3/8" to 3" 3-Strand Twisted High Strength Composite bull rope, 100% plied polyester jacket insures durability and the high strength co-polymer core gives you excellent break strength. 20% stronger than standard poly-dac lines.

High Strength 3-Strand Twisted Co-Polymer

3/8" x 600'	AG3STCP38600
1/2" x 600'	AG3STCP12600
5/8" x 600'	AG3STCP58600
3/4" x 600'	AG3STCP34600
1" x 600'	AG3STCP1600
1 1/2" x 600'	AG3STCP112600
2" x 600'	AG3STCP2600
2 1/4" x 600'	AG3STCP214600
2 5/8" x 600'	AG3STCP258600
3" x 600'	AG3STCP3600
4" x 600'	AG3STCP4600

	1/2" x 600'	AG3STHSC12600
	5/8" x 600'	AG3STHSC58600
	7/8" x 600'	AG3STHSC78600
	1" x 600'	AG3STHSC1600
1	1/2" x 600'	AG3STHSC112600
	2" x 600'	AG3STHSC2600
2	1/4" x 600'	AG3STHSC214600
2	5/8" x 600'	AG3STHSC258600
	3" x 600'	AG3STHSC3600

Minumum Break Strength

1/2" = 5,590 lbs	2"	=	81,865 lbs
5/8" = 10, 450 lbs	2 1/4"	=	101,915 lbs
7/8" = 18,910 lbs	2 5/8"	=	137,105 lbs
1" = 22,395 lbs	3"	=	174,930 lbs
$1 \ 1/2$ " = 48,025 lbs			

5/8" to 3" 3-Strand Twisted High Strength Copolymer, 100% Copolymer insures high strength. 20% Stronger than yellow Polypropylene lines. All Diameters are available in 600' Lengths. Quality Guaranteed

Average Tensile Strength

3/8'' = 3,735 lbs	1'' = 22,785 lbs
1/2''= 6,156 lbs	$1 \ 1/2" = 42,300 \ \text{lbs}$
5/8''= 10,693 lbs	2'' = 78,530 lbs
3/4''= 12,103 lbs	2 1/4" = 113,700 lbs
	2 5/8" = 133,798 lbs
	3'' = 167,968 lbs
	4'' = 286,683 lbs



Phone 847•564•9016

Fa x 847•564•9017



Heavy Duty Marine

Twisted and Braided Rope

3-Strand Twisted Poly Dac

3/16" to 4" 3-Strand Twisted Composite. High Strength Polyester on the outside of each strand and Light Weight White Polypropylene on the inside. Excellent for general purpose, Roofing Anchor Lines, Industrial Lifting, and replacing any polypropylene twisted lines. Holds knots well. Available in White with a Green Tracer.

> Minumum Tensile Strength 1/4" = 1,130 lbs 3/8" =5.300 lbs 1/2" =5,500 lbs

> > 3/4" = 10, 192 lbs 1'' = 17,000 lbs

5/8" =



Average Tensile Strength

3/16" = 900 lbs
1/4" = 1,490 lbs
5/16" = 2,300 lbs
3/8" = 3,340 lbs
1/2" = 5,750 lbs
5/8" = 9,350 lbs
3/4" = 12,800 lbs
1" = 22,600 lbs





1/4" x	600'	AGPD14600
3/8" x	600'	AGPD38600
1/2" x	600'	AGPD12600
5/8" x	600'	AGPD58600
3/4" x	600'	AGPD34600
1" x	600'	AGPD1600

3-Strand Twisted Nylon

3/16" x	1000'	AG3STN3161000
1/4" x	600'	AG3STN14600
5/16" x	600'	AG3STN516600
3/8" x	600'	AG3STN38600
1/2" x	600'	AG3STN12600
5/8" x	600'	AG3STN58600
3/4" x	600'	AG3STN34600
1" x	600'	AG3STN1600



7.400 lbs

3-Strand Twisted Polypropylene

3/16" to 2" 3-Strand Twisted Polypropylene. High Strength and Good Elasticity. Excellent for general purpose, Medium Duty Pull Line, Barrier Rope, and Pool Rope. Available in Yellow (in stock), Tan (Brown), Black or Any Color for Special Requests.

3

Average Tensile Strength	
3/16" = 720 lbs	
1/4" = 1,130 lbs	
5/16" = 1,710 lbs	
3/8" = 2,440 lbs	
1/2" = 3,780 lbs	
5/8" = 5,600 lbs	
3/4" = 7,650 lbs	
1'' = 12,660 lbs	

3/16" x 1	1,200'	AG3STPP3161200
1/4" x	600'	AG3STPP14600
5/16" x	600'	AG3STPP516600
3/8" x	600'	AG3STPP38600
1/2" x	600'	AG3STPP12600
5/8" x	600'	AG3STPP58600
3/4" x	600'	AG3STPP34600
1" x	600'	AG3STPP1600

Hollow Braid Polypropylene

12-Strand.Hollow Braid Polypropylene. Used as a lightweight pull line Great as a Crowd Barrier Rope. Easy to Splice. It Floats! Yellow.

Average Tensile Strength

1/4" = 990 lbs 3/8" = 2,100 lbs 1/2" = 2,675 lbs 1/4" x 1000' AGHBPP141000 3/8" x 1000' AGHBPP381000 1/2" x 1000' AGHBPP121000

Phone 847•564•9016

Fax 847•564•9017



Heavy Duty Marine

Twisted and Braided Rope



3-Strand Twisted Manila

3-Strand Twisted Manila 1/4" to 2" 3-Strand Twisted manila. Natural Fiber produced only in the Philippines. Premium Manila. 600' and 1,200'

Length Coils AverageT ensile Strength 540 lbs 5/16" = 1/4" =900 lbs

	3/8" =	1,220 lbs	1/2" =	2,380 lbs
	5/8''=	3,960 lbs	3/4" =	4,000 lbs
	7/8" =	6,900 lbs	1"=	8,100 lbs
1	1/4" =	12,200 lbs	1 1/2" =	16,700 lbs
		2.2	27.000.11	_

2'' = 27,900 lbs

1/4" x	600'	AG3STM14600
5/16" x	600'	AG3STM516600
3/8" x	600'	AG3STM38600
1/2" x	600'	AG3STM12600
5/8' x	600'	AG3STM58600
3/4" x	600'	AG3STM34600
7/8" x	600'	AG3STM78600
1" x	600'	AG3STM1600
1 1/4" x	600'	AG3STM114600
1 1/2" x	600'	AG3STM112600
2" x	600'	AG3STM2600

Solid Braid Multifilament Polypropylene

3/8" x 600'	AGSBMPP38600
1/2" x 600'	AGSBMPP12600
5/8" x 600'	AGSBMPP58600

Average Tensile Strength 3/8" = 1,500 lbs 1/2" = 2,220 lbs 5/8" = 2,820 lbs

"Solid Braid Multifilament Polypropylene"3/8" to 5/8" Solid Braid Multifilament Polypropylene. Very Soft, Floats and Moderate Elongation. Black, Blue or Red.

3-Strand Twisted Polyester



AG3STP38150
AG3STP38600
AG3STP12150
AG3STP12600
AG3STP58150
AG3STP58600
AG3STP34150
AG3STP34600



3-Strand Twisted 100% Polyester. High Strength with Firm Round Construction. Easy to Splice.

Average Tensile Strength $3/8" = 3.700 \text{ lbs} \ 1/2" = 6.400 \text{ lbs}$ 5/8" = 9,350 lbs 3/4" = 11,300 lbs



Solid Braid Nylon

1/4"	AGDBN14
3/8"	AGDBN38
1/2"	AGDBN12
3/4"	AGDBN34
1"	AGDBN1
1 1/2"	AGDBN112

Solid Braid is one solid braided unit. Made of 100% Nylon. Made very firm for Pull Line. Your choice of 200' or 1,000' lengths. Excellent for general purpose, tie downs, and replacing any type of twisted lines. Available in a White or White with Tracer. Holds a good knot.

Average Tensile Strength 1/4" = 2,100 lbs 3/8" = 4,800 lbs 1/2" = 8,300 lbs 3/4" = 19,100 lbs 1" = 31,000 lbs 1 1/2" = 72,000 lbs

Double Braid Polyester

Double Braid Polyester over Polyester 1/4" to 2" Great Flexibility - Very Low Elongation - Excellent Abrasion Resistance. 600' and 1,200' Length Reels. Contact us for more information.



Phone 847•564•9016

Fax 847•564•9017

www.allgearinc.com



Instagram with Cristina

https://www.instagram.com/allgearwithcristina

Get a sneak peak into our production department with Cristina on Instagram. See the newest products and get a behind the scenes look at some of our most popular products.






Loops 16,000 LBS AllGear.Inc.



Weekly Education

Sign up for our weekly educational newsletter and check out what's new on our All Gear homepage.

Call your sales rep and give them your email address or add yourself to our list at www.allgearinc.com/mailinglist.html



Educational Videos

Sky High Ring to Ring Install allgearinc.com/videos/videoskyringring.html



Are you interested in learning more about our products and how to use them? Our website offers a large range of videos for the purpose of offering more detailed product information and instructions on how to use our products and what products work best together.

www.allgearinc.com/videos.html





Installing a Quick Connect allgearinc.com/videos/videoquickconnect.html

Locking Brummel Splice with Branch Saver allgearinc.com/videos/lockingbrummel.html

Phone 847•564•9016 Fax 847•564•9017

Arborist, Construction, Cell Tower, Utility and Heavy-Duty Marine Supply

Phone 847-564-9016 Fax 847-564-9017 www.allgearinc.com