



rock exotica
EXPERT USE ONLY



Company

Our Goal

The purpose of Rock Exotica is simple: to manufacture the most innovative technical equipment in the world. Every action we take is to support this goal.

Our Manufacturing

Rock Exotica is driven by our design and manufacturing. In a world where companies focus on marketing and sell undifferentiated products they may not even make themselves, we are an anomaly, to say the least. I can guarantee that we have the smallest marketing department of any company in the industry. But I can also promise that we have manufacturing that is unique in all the world. We spare no expense to acquire state-of-the-art CNC machine tools. We mill almost everything out of solid material rather than use cheaper methods. And rather than make decisions based on what products can sell the most, we make those decisions based on what products we can be most proud to produce.

Where to Buy Rock Exotica Equipment

USA & Canada

A variety of knowledgeable specialty dealers carry our equipment. If you can't locate, one call us and we'll direct you to a dealer in your area who can get you what you need quickly.

International

We have dealers in all parts of the world. Please contact us for the dealer nearest you. Most Rock Exotica gear is CE certified and available in Europe. Some of our European dealers also offer training in specialized techniques, including use of our Vortex Multipod. Our German distributor has an excellent catalog that can be downloaded at rockexotica.de.

Carabiners

Rock Exotica has refined the carabiner far beyond the offerings of other manufacturers. Our carabiners offer features you cannot get anywhere else:

- Highest inward gate/sleeve strength to reduce risk of something levering against the sleeve and breaking it open.
- Widest variety of lockers – check out our Manual Lock.
- Best Autolocks – we use a pull-down & twist sleeve which is intuitive & easy to use. Once people try it they never go back.
- Widest gate opening – we use a slightly angled gate opening that is ergonomic & opens farther.
- Specialized swivel biners, lanyard pin models and more.
- USA – All manufacturing is done at our factory in Utah.



rockD Auto-Lock

C2 A
C2 A-B (black)

rockD Screw-Lock

C2 S
C2 S-B (black)

rockD Manual-Lock

C2
C2 M-B (black)

rockD Non-Locker

C2 NL
C2 NL-B (black)

rockD BiWire

C2 BW
C2 BW-B (black)

Locking carabiners

Weight: Screw 2.61 oz (73 gm)
Auto/Manual: 2.85 oz (80 gm)
Breaking Strength:
Major axis: 29 kN
Minor axis (Auto/Manual): 11 kN
Minor axis (Screw): 9 kN
Open gate: 9 kN
Inward against sleeve: 6 kN
Gate opening: .98" (24.9 mm)

Non-Locker

Weight: 2.36 oz (67 gm)
Breaking Strength:
Major axis: 29 kN
Minor axis: 10 kN
Open gate: 9 kN
Gate opening: 1.0" (25.4 mm)

BiWire

Weight: 2.36 oz (67 gm)
Breaking Strength:
Major axis: 30 kN
Minor axis: 11 kN
Open gate: 9 kN
Gate opening: 1.0" (25.4 mm)

Carabiners



Pirate (HMS)

Pirate Auto-Lock

C1 A
C1 A-B (black)

Pirate Screw-Lock

C1 S
C1 S-B (black)

Pirate Manual-Lock

C1 M
C1 M-B (black)

Weight: Screw 2.85 oz (80 gm)
Auto/Manual 3.09 oz (87 gm)
Breaking Strength:
Major axis: 27 kN
Minor axis: 11 kN
Open gate: 7 kN
Inward against sleeve: 6 kN
Gate opening: 1.0" (25.4 mm)



rockO

RockO Manual-Lock

C3 M
C3 M-B (black)

rockO Screw-Lock

C3 S
C3 S-B (black)

Locking carabiners

Weight: Screw 2.61 oz (73 gm)
Auto/Manual 2.85 oz (80 gm)
Breaking Strength:
Major axis (Auto/Manual): 25 kN
Major axis (Screw): 24 kN
Minor axis (Auto/Manual): 11 kN
Minor axis (Screw): 9 kN
Open gate: 6 kN
Inward against sleeve: 6 kN
Gate opening: .93" (22 mm)

rockO Non-Locker

C3 NL
C3 NL-B (black)

rockO Auto-Lock

C3 A
C3 A-B (black)

Non-Locking carabiners

Weight: 2.36 oz (67 gm)
Breaking Strength:
Major axis: 22 kN
Minor axis: 10 kN
Open gate: 6 kN
Gate opening: 1.0" (25.4 mm)



rockSteel

rockD Stainless Auto-Lock

C2S A

rockSteel Screw-Lock

M31 SL
M31 SLN (black)

Stainless

Weight: 7.68 oz (217 gm)
Breaking Strength:
Major axis: 41 kN
Minor axis: 17 kN
Open gate: 13 kN
Inward against sleeve: 9 kN
Gate opening: 1.0" (25.4 mm)

rockSteel Auto-Lock

M31 TL
M31 TLN (black)

rockSteel Manual-Lock

M31 ML
M31 MLN (black)

rockSteel

Weight: Screw 8.1 oz (226 gm)
Auto/Manual 8.8 oz (246 gm)
Breaking Strength:
Major axis: 45 kN
Minor axis (Auto/Manual): 16 kN
Minor axis (Screw): 18 kN
Open gate: 12 kN
Gate opening: 1.2" (30 mm)



SwivaBiner

SwivaBiner Auto-Lock w/Swivel Eye

C82 A

SwivaBiner Screw-Lock w/Swivel Eye

C82 S

SwivaBiner w/Swivel Eye

Weight: Screw 4.60 oz (130 gm)
Auto 4.86 oz (137 gm)
Breaking Strength:
Major axis: 30 kN
Minor axis: 7 kN
Open gate: 12 kN
Gate opening: .84" (21 mm)

SwivaBiner Auto-Lock

C81 A

SwivaBiner Screw-Lock

C81 S

SwivaBiner

Weight: Screw 5.5 oz (153 gm)
Auto 5.9 oz (166 gm)
Breaking Strength:
Major axis: 30 kN
Minor axis: 7 kN
Open gate: 12 kN
Gate opening: .84" (21 mm)



Lanyard Biners

rockD Twist-Lock w/ Lanyardpin

C2 LPT
C2 LPT-B (black)

rockD Auto-Lock w/ Lanyardpin

C2 LPA
C2 LPA-B (black)

rockD Twist & Auto-Locks

Weight: 3.52 oz (99 gm)
Breaking Strength:
Major axis: 30 kN
Minor axis: 11 kN
Open gate: 10 kN
Inward against sleeve: 6 kN
Gate opening: .96" (24.3 mm)

rockO Twist-Lock w/ Lanyardpin

C3 LPT
C3 LPT-B (black)

rockO Auto-Lock w/ Lanyardpin

C3 LPA
C3 LPA-B (black)

rockO Twist & Auto-Locks

Weight: 3.2 oz (90 gm)
Breaking Strength:
Major axis: 24 kN
Minor axis: 11 kN
Open gate: 6 kN
Inward against sleeve: 6 kN
Gate opening: .94" (23.8 mm)



Pulleys

We've reinvented the pulley. Our machined pulleys are milled from solid alloy so we can take material away where it's not needed and leave it where it is. That's why these pulleys are more compact and lighter compared to conventional stamped pulleys. The axle is machined as part of the sideplate, allowing us to use a flush head axle screw.

The Omni-Block swivel pulleys combine a swivel with a pulley in a patented design that saves vertical height and lets you remove and install the rope while keeping the pulley attached to the anchor.

The Aztek pulley has become the world standard in a compact mechanical advantage system.

All Rock Exotica pulleys are built with ball bearings for efficiency.



Mini Machined Pulley

P21 D (Double)
P21 D-B (black)
P21 (Single)
P21 B (black)

P21 D

Weight: 5.0 oz (141 gm)
Breaking Strength: 2 x 9 kN x 2=36 kN
Working Load: 2 x 2kN x 2=8 kN
Max Rope Diameter: 11 mm

P21

Weight: 2.9 oz (83 gm)
Breaking Strength: 2 x 15 kN=30 kN
Working Load: 2 x 2.5kN=5 kN
Max Rope: 11 mm



Machined Rescue Pulley

P22
P22-B (black)

P22

Weight: 5.1 oz (144 gm)
Breaking Strength: 2 x 18 kN=36 kN
Working Load: 2 x 4kN=8 kN
Max Rope Diameter: 13 mm



PMP 2.0 Prussik Minding Pulley

P1
P1 B (black)

P1

Weight: 11 oz (311 gm)
Breaking Strength: 2 x 18 kN=36 kN
Working Load: 2 x 4kN=8 kN
Max Rope Diameter: 13 mm



Omni-Block 1.5"

P51
P51 B (black)
P51 SS (Single-Steel Sheave)
P51 SS-B (black)

P51

Weight: 9.2 oz (260 gm)
Breaking Strength: 2 x 18 kN=36 kN
Working Load: 2 x 4kN=8 kN
Max Rope Diameter: 13 mm

P51 SS

Weight: 10.7 oz (303 gm)
Breaking Strength: 2 x 18 kN=36 kN
Working Load: 2 x 4kN=8 kN
Max Rope Diameter: 13 mm



Omni-Block 1.5" Double

P51 D
P51 D-B (black)

P51 D

Weight: 14.5 oz (411 gm)
Breaking Strength: 2 x 9 kN x 2=36 kN
Working Load: 2 x 2 kN x 2=8 kN
Max Rope Diameter: 13 mm



Aztek System



Omni-Block 2.0"

P53
P53 B (black)

P53

Weight: 12.3 oz (348 gm)
Breaking Strength: 2 x 18 kN=36 kN
Working Load: 2 x 4kN=8 kN
Max Rope Diameter: 13 mm



Omni-Block 2.0"

P53 OW (one-way)
P53 OW-B (black)

P53 OW

This Omni-Block has a one-way bearing
Weight: 12.3 oz (348 gm)
Breaking Strength: 2 x 18 kN=36 kN
Working Load: 2 x 4kN=8 kN
Max Rope Diameter: 13 mm



Aztek Pulley Set

P41
P41 Set-B (black)

P41

Weight: 15.4 oz (436 gm)
Breaking Strength (Each pulley):
2 x 9 kN x 2=36 kN
Working Load: 2 x 2 kN x 2=8 kN
Max Rope Diameter: 8 mm

Swivels

Rock Exotica designed and manufactured the first high quality swivels. Through the years they exploded in popularity as people found more and more uses for them. We make the widest variety in the world, including new shackle swivels. All our swivels use high strength stainless axles and sealed ball bearings.



Rotator Triangular Swivel

S1 L (large)
S1 (small)

S1 L

Weight: 5.05 oz (143 gm)
Breaking Strength: 36 kN
Working load: 5 kN

S1

Weight: 4.03 oz (114 gm)
Breaking Strength: 36 kN
Working load: 5 kN



Rotator Round Swivel

S2 L (large)
S2 (small)

S2 L

Weight: 4.48 oz (127 gm)
Breaking Strength: 36kN
Working load: 5kN

S2

Weight: 3.9 oz (110 gm)
Breaking Strength: 36 kN
Working load: 5 kN



Rotator Shackle Swivel

SS1 L (1.0 in)
SS1 (.75 in)

SS1 L

Weight: 6.72 oz (190 gm)
Breaking Strength: 36 kN
Working load: 5 kN

SS1

Weight: 5.76 oz (163 gm)
Breaking Strength: 36 kN
Working load: 5 kN



Orbitor Swivel

S3

Weight: 3.52 oz (99 gm)
Breaking Strength: 26 kN
Working load: 5 kN



Rigging Plates

Rigging plates excel at keeping your rigging organized. They simplify the situation by multiplying anchors and keeping various lines orderly. Our plates are milled from oversize material so that ALL surfaces are machined, even the faces, for flatness, surface defect removal and precise dimensions. All edges are beautifully rounded with carbide milling cutters for a full, smooth radius unobtainable by tumbling alone.



TriRig
RP1

Mini 3 Hole Rigging Plate
Weight: 1.79 oz (51 gm)
Breaking Strength: 36 kN



PentaPlate
RP2

Super Light 5 Hole Rigging Plate
Weight: 3.84 oz (108 gm)
Breaking Strength: 36 kN



Se7en
RP3

Full Size Rigplate
Weight: 13.3 oz (376 gm)
Breaking Strength: 36 kN



Descenders

Our Micro and MiniEight feature side ears that let you easily vary friction, accommodate a wide range of rope sizes and are super easy to tie off. The biner hole has a rubber gasket that fits tightly to your carabiner. We use 7075 aluminum, which is harder and will last longer than the cheaper alloy in other figure 8's.

Solo Belay Devices

The classic devices for solo climbing. Note that solo climbing is for experts only and requires special skills and acceptance of considerable risk and total responsibility. These devices will not keep you safe.



MiniEight
F1

Weight: 2.1 oz (60 gm)
Height: 3.64" (92 mm)
Width: 3.21" (82 mm)
Max Rope Dia. (Single Rope): 13 mm
Max Rope Dia. (Double Rope): 10.5 mm
Breaking Strength: 14 kN



MicroEight
F2

Weight: 1.7 oz (49 gm)
Height: 2.96" (75 mm)
Width: 3.05" (78 mm)
Max Rope Dia. (Single Rope): 13 mm
Max Rope Dia. (Double Rope): 10.5 mm
Breaking Strength: 14 kN



Soloaid
SB2

Weight: 6.5 oz (184 gm)
Rope Size: 10-11 mm



Soloist
SB1


Weight: 10 oz (284 gm)
Rope Size: 10-11 mm



Silent Partner
SB3

Weight: 14.9 oz (422 gm)
Rope Size: 9.8-11 mm

Other Exotic Gear

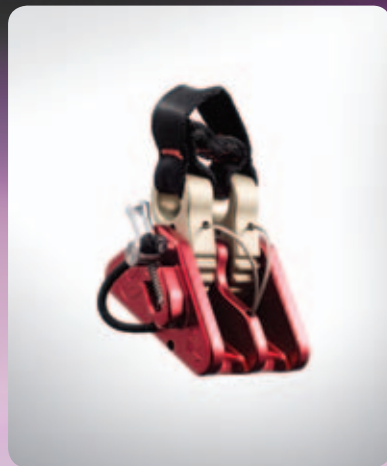

Double Microcender
RG1

For specialized uses by arborists.

Weight: 8.7 oz (246 gm)
Rope Size: 9-13 mm



Wall Hauler
PC1

The classic camming pulley, back by popular demand at a great price.

Weight: 8.2 oz (232 gm)
Rope Size: 9-13 mm
Breaking Strength: 19.5 kN (Pulley);
2.6 kN (Camming Unit)
The camming unit should not be subject to a load in excess of 180 lbs (86 kg).



Grappler
GH1

We always wanted to make a folding grappling hook, just because it's so cool. So we did, and it is. It folds up so it is easy to store and carry (and won't impale you). Don't storm a castle without it.

Weight: 35.2 oz (997 gm)



Chalk Bag
Expert Use Only Logo
GCHB-EX

Chalk Bag - A chalk bag with our logo.

Holds Chalk.

Even More Exotic Equipment

We develop so many new products that no printed catalog can stay up to date. We have many new items, restricted products for very special uses only, etc. Please consult our website at www.rockexotica.com.

Rock Exotica

Rock Exotica Equipment LC
P.O. Box 160470
Freeport Center, Bldg. F-11
Clearfield, Utah 84016
USA

P 801.728.0630
F 801.728.0667

www.rockexotica.com

Cover Photo:
Klaus Fengler

Studio Photos:
Devon Sullivan
www.sullivanimage.com

Climbing Photos:
Jason Ball
jason.ball@comcast.net