

# SAFETY PRODUCTS CATALOG

FEATURING



**U.S. RIGGING  
SUPPLY**  
*Powered by service. Driven by quality.*

[www.usrigging.com](http://www.usrigging.com)



**Pelican Rope**  
The Most Trusted Name in Rope

[www.pelicanrope.com](http://www.pelicanrope.com)

• PROFESSIONAL GRADE CLIMBING ROPES AND HARDWARE FOR WORKING AT HEIGHT •

(866) 490-7444

#SafetyUncompromised




# Pelican Rope

The Most Trusted Name in Rope

## UNCOMPROMISED QUALITY & EFFICIENCY

If you want to know about Pelican Rope Works, look at our customers. They've been working with us for **over 40 years** buying high performance synthetic and specialty rope products, rope lanyards, slings, and custom rope assemblies. **Our mission is simple, safety uncompromised.** At every stage of our company, it is a promise each and every member honors.

*Pelican Rope is an ISO 9001:2015 certified manufacturer of high performance specialty rope products, rope lanyards, slings and custom rope assemblies.*

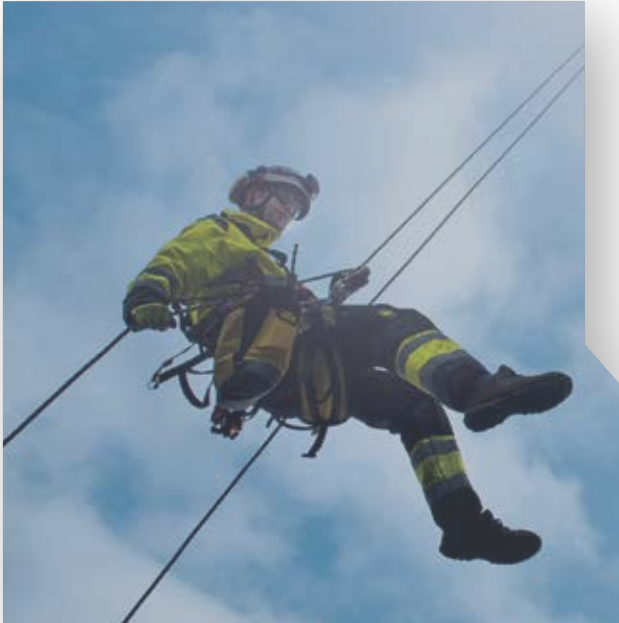

# U.S. RIGGING SUPPLY

Powered by service. Driven by quality.

## DEPENDABILITY IS OUR HALLMARK; EXCEPTIONAL VALUE OUR EVERYDAY STANDARD.

Over 40 years delivering cutting edge solutions. Our devotion to innovation, quality and customer service has exceeded the standards established by the Cordage Institute, U.S. Military, and NFPA. Time has only amplified our abilities. The expectations of our loyal customers are always met. We are grandmasters of our trade. Our secret is simple, safety uncompromised at every turn.



## THE ProClimb<sup>®</sup> DIFFERENCE

We know people who climb for a living need value they can trust. Every one of our ProClimb products provides industry-leading quality, testing, experience, and cost. You might find gear for less, but you won't find better value than ProClimb.



Want to evaluate our products yourself? You can find our logo next to each of our products and learn more about the specifications of our equipment to see what suits you best.



# DIRECTORY



## Climbing & Rescue Rope

*By Pelican Rope®*



## Industrial & Utility Rope

*By Pelican Rope®*



## Assemblies & Lanyards

*By Pelican Rope®*



## Rope Accessories

*By Pelican Rope®*



## Fall Protection

*By U.S. Rigging Supply®*



SEE A  
**QR**  
CODE?

FEATURED  
PRODUCT



NEW  
PRODUCT



## STANDARDS & AFFILIATIONS

U.S. Rigging Supply is a certified Orion Registrar ISO 2001:2015 standard company.



NFPA® is a world leading authority in requirements for fire safety equipment.



UL® is the leading independent product safety certification laboratory in the USA.



Manufacturer's declaration that the product meets European applicable certifications for health & safety requirements.



The Cordage Institute is a distinguished rope cordage standards association.



Associated Wire Rope Fabricators is a reputable wire rope and rigging manufacturing and technical standards organization.



The Defense Logistics Agency is a U.S. government approval for Qualified Suppliers List of Manufacturers.



The International Climbing and Mountaineering Federation is a major international mountaineering and climbing standards organization.



The Tree Care Industry Association is a leading arborist and tree care organization



The American National Standards Institute is the primary organization for fostering the development of safety technology standards in the United States.



The Canadian Standards Association deals with standards development and their application through product certification, management systems registration, and information products.



# STATIC MASTER™



NFPA & ANSI certified sewn eyes available upon request.

SKU	DIAMETER INCHES	MIN. BREAK STRENGTH LBS	WEIGHT PER 100 FT LBS	NFPA	ANSI
2WP-12	3/8"	6,214	4.6	Technical	
2WP-14	7/16"	7,652	5.7	Technical	
2WP-16	1/2"	9,901	7.5	General	•
2WP-20	5/8"	11,046	10.8	General	•

## Awesome Static Line

*"I took this rope out for rappelling. It has a nice stiff line with good braking. I've only used it for a few runs down the rock so far, but so far I like it very much."*

-Michael S., Bend, Oregon

## IDEAL FOR



FALL PROTECTION



SAFETY/RESCUE  
OPERATIONS



RAPPELLING

## STATIC KERNMANTLE RAPPELLING ROPE

Pelican Rope's static kernmantle features a tough, chemical resistant polyester cover over a non-rotational, parallel nylon core; making it ideal for rappelling and safety/rescue operations.

Static kernmantle allows little stretch while the nylon core provides energy absorption. Its firm braid is flexible enough to be tied and passed over pulleys and sheaves with ease. Steam setting eliminates cover over core slippage.

Rope includes waterproof ID tape. UL Certified to NFPA 1983-2017 edition standards and vertical lifeline components per ANSI Z359.15-2014.

## COLOR OPTIONS



## BENEFITS

- Built to Withstand Rugged Outdoor Conditions
- All Ropes Quality and Strength Tested
- Guaranteed Excellent Performance
- Low Stretch
- Excellent Grip Feature

CONSTRUCTION Static Kernmantle

COVER Polyester

CORE Nylon



# STATIC MASTER II™

## G-RATED NFPA RESCUE ROPE

Our new Static Master II is constructed with a unique 32 strand construction. Two Twill pattern braided strands per carrier provides a smoother running cover. This is incredibly smooth cover provides reduced drag through gear for faster ascending and finer control on descends. This NFPA certified rope offers best in class handling. The tough polyester cover provides excellent UV protection and high abrasion resistance. The balanced nylon straight core provides a torque free rope.

UL Certified to NFPA 1983-2017 edition standards and vertical lifeline components per ANSI Z359.15-2014.



## COLOR OPTIONS



SKU	DIAMETER INCHES	MIN. BREAK STRENGTH LBS	WEIGHT PER 100 FT LBS	COLOR	NFPA	ANSI
2WP2-14	7/16"	7,017	6	Blue	Technical	
2WP2-16	1/2"	9,809	8	Red	General	•

## BENEFITS

- Best in Class Handling
- Unique, Two Strand Design
- Smooth Rolling in Pulleys
- Reduced Drag for Faster Ascent
- Descending with Fine Control

### Extremely Useful

*"This rope handles so smooth feeding and taking slack. This will be the first of many adventures with the Static Master II in tow."*

-Bob T., Hallowell, Maine

CONSTRUCTION Static Kernmantle  
COVER Polyester  
CORE Nylon

## IDEAL FOR



RAPPELLING



LIFE SAFETY  
CERTIFIED  
OPERATIONS



TOP ROPING



# STATIC MASTER PRO™



## REVOLUTIONIZING THE WAY YOU CLIMB

Our new Static Master Pro is a static kernmantle rope with a polyester core and cover. Because of its 100% polyester composition, this rope has very low stretch yet is high strength.

It is also very flexible and can be tied into tight knots and pass over pulleys and sheaves smoothly.

Static Master Pro has been third-party tested and meets NFPA 1983-2017 and ANSI Z359.15-2014 standards.

SKU	DIAMETER INCHES	MIN. BREAK STRENGTH LBS	WEIGHT PER 100 FT LBS
1WPP-14	7/16"	6,600 lbs	6.5
1WPP-16	1/2"	9,160 lbs	8.5

## COLOR OPTIONS



**CONSTRUCTION** Static Kernmantle  
**COVER** Polyester  
**CORE** Polyester

## BENEFITS

- Extremely Low Stretch
- Built to Withstand Rugged Outdoor Conditions
- High Strength
- High Flexibility



## IDEAL FOR



RAPPELLING



SAFETY/RESCUE OPERATIONS



RIGGING LINES



# FIRESHEILD-T™

## TECHNORA FIRE ESCAPE ROPE

Our 100% Technora® escape rope is one of the highest heat resistant ropes on the market, making it optimal for search and rescue operations. It has a static kernmantle construction and is heat resistance up to 930° F with a loss of strength at 500° F. This high strength, low stretch rope is UL and NFPA 1983-2017 certified as well as a top choice of fire fighters and rescue operations.

### BENEFITS

- Works with Descending Devices
- Great Abrasion Resistance
- Extremely Durable
- Flexible and Supple for Compact Storage

**CONSTRUCTION** Static Kernmantle  
**COVER** Technora®  
**CORE** Technora® or Polyester



SKU	DIAMETER METRIC	MIN. BREAK STRENGTH LBS	WEIGHT PER 100 FT LBS	TYPE
2TT-7.5T	7.5 mm	6,345	2.8	100% Technora®
2TP-7.5T	7.5 mm	4,282	2.7	Technora® over Polyester

### IDEAL FOR



FIRE ESCAPE APPLICATIONS



PRUSIK CORDS



Family Code: 2KK / 2KP

# FIRESHEILD-K™

## KEVLAR AP FIRE ESCAPE ROPE

This 100% Kevlar AP® Rope is similar and has the same benefits of the Technora® Fire Escape rope. It is heat resistant up to 930° F and a loss of strength at 500° F. It's also UL and NFPA 1983-2017 certified and is another vital requirement for safety operations.

### BENEFITS

- Works Well with Descent Devices
- Good Abrasion Resistance
- Lightweight
- Flexible

**CONSTRUCTION** Static Kernmantle  
**COVER** Kevlar AP®  
**CORE** Kevlar AP® or Polyester



SKU	DIAMETER METRIC	MIN. BREAK STRENGTH LBS	WEIGHT PER 100 FT LBS	TYPE
2KK-7.5K	7.5 mm	6,258	2.9	100% Kevlar®

### IDEAL FOR



FIRE ESCAPE APPLICATIONS



PRUSIK CORDS



# ESCAPE PRO™

KERNMANTLE  
CONSTRUCTION

## PERSONAL ESCAPE ROPE

Pelican's personal escape rope is a durable kernmantle construction that is produced with a strong polyester cover over shock absorbing nylon. Although ideal for rescue operations, as a smaller diameter its high tensile strength is ideal for individual use. This escape rope is UL and NFPA 1983-2017 certified.

SKU	DIAMETER METRIC	MIN. BREAK STRENGTH LBS	WEIGHT PER 100 FT LBS
2WP24-7.50	7.5 mm	4,463	2.7

## IDEAL FOR



ESCAPE TRAINING

PERSONAL ESCAPE  
OPERATIONS

## BENEFITS

- Works Well with Descent Devices
- Smooth Cover
- Low Stretch
- Smooth, Firm Hand Folds Well into Packs

**CONSTRUCTION** Static Kernmantle**COVER** Polyester**CORE** Nylon



# WATER RESCUE ROPE

## POLYPROPYLENE H<sub>2</sub>O RESCUE ROPE

Pelican's polypropylene rope is a favorite among water rescue professionals. Its 100% polypropylene cover and core make it easy to handle and its vivid yellow color provides excellent visibility.



SKU	DIAMETER INCHES	TENSILE STRENGTH LBS	WEIGHT PER 100 FT LBS
3P-12Y	3/8"	3,000	3.4
3P-14Y	7/16"	3,300	4.7

### BENEFITS

- Lightweight
- Buoyant
- High Visibility
- Nubby, Excellent Grip

### IDEAL FOR



FALL PROTECTION



SAFETY/RESCUE OPERATIONS

CONSTRUCTION 16 Strand

COVER Polypropylene

CORE Polypropylene



# NFPA THROWLINE

24 STRAND  
CONSTRUCTION



## NFPA H<sub>2</sub>O ROPE LINE

Similar to Water Rescue Rope, our NFPA Throw Line provides excellent visibility as well as handling. Yet with a 24 strand construction, it not only has better flexibility, but an increased tensile strength as well. This rope is UL certified and approved for the NFPA 1983-2017 edition.

SKU	DIAMETER INCHES	MIN. BREAK STRENGTH LBS	WEIGHT PER 100 FT LBS
3PN-12Y	3/8"	3,888	3.05

### BENEFITS

- Bright Colors for Greater Visibility
- Supple for Compact Storage
- Certified to the Highest Standard
- Buoyant

**CONSTRUCTION** 24 Strand  
**COVER** Polypropylene  
**CORE** Polypropylene & Nylon Blend

### IDEAL FOR



SAFETY/RESCUE OPERATIONS



STILL WATER RESCUE



# SWIFT WATER RESCUE ROPE

## DYNEEMA POLYPROPYLENE H<sub>2</sub>O RESCUE ROPE

This water rescue rope has a blended Dyneema® and polypropylene core. With a multifilament polypropylene cover, this rope floats and has near zero water retention. It is extremely strong, lightweight, and has a no-stretch braid that meets the needs of coastal and river rescue professionals worldwide.



SKU	DIAMETER INCHES	TENSILE STRENGTH LBS	TRACER COLOR	WEIGHT PER 100 FT LBS
3Q-08Y	1/4"	3,200	Blue	1.7
3Q-10Y	5/16"	3,400	Red	2.3
3Q-12Y	3/8"	4,950	Red	3.4

### BENEFITS

- Nubby, Excellent Grip
- Strong & Lightweight
- Buoyant
- Designed for Swift Water Rescue

### IDEAL FOR



SAFETY/RESCUE OPERATIONS



SWIFT WATER RESCUE

**CONSTRUCTION** 16 Strand  
**COVER** Polypropylene  
**CORE** Dyneema® & Polypropylene Blend



# TECHNORA PRUSIK LINE



This Technora® over nylon core rope is the original high strength no-melt prusik line. Technora® is eight times stronger than steel and highly resistant to heat, acids, alkalis and organic solvents and is not vulnerable to damage caused by steam or sea water.

SKU	DIAMETER INCHES	TENSILE STRENGTH LBS	WEIGHT PER 100 FT LBS
1S-08T	1/4"	2,900	2.2
1S-11T	11/32"	6,000	3.8

## IDEAL FOR



HIGH FRICTION  
PRUSIK SITUATIONS

## BENEFITS

- Heat Resistant
- Abrasion Resistant
- Long-lasting Prusik

**CONSTRUCTION** Kernmantle

**COVER** Technora®

**CORE** Nylon



# ACCESSORY CORD

## KERNMANTLE COMPOSITE ACCESSORY CORD

This versatile kernmantle composite rope has a shock absorbent nylon core and a high abrasion resistant polyester cover that is soft enough to provide excellent holding power when tying prusik knots.

SKU	DIAMETER INCHES	TENSILE STRENGTH LBS	WEIGHT PER 100 FT LBS
1S-08	1/4"	2,950	2.3
1S-10	5/16"	3,700	3.1



### COLOR OPTIONS



### BENEFITS

- Good Grip
- Long-lasting
- Flexible
- Excellent Knot Holding Power

### IDEAL FOR



LOW FRICTION  
PRUSIK SITUATIONS

**CONSTRUCTION** Kernmantle  
**COVER** Polyester  
**CORE** Nylon



**RIG MASTER™**3 STRAND  
CONSTRUCTION**3 STRAND COMPOSITE**

Pelican's 3 strand composite rope has the durability required for the job, while remaining lightweight and allowing for a comfortable grip. It also provides good protection against abrasion and is energy absorbent.



SKU	DIAMETER INCHES	AVG. BREAK STRENGTH LBS	WEIGHT PER 100 FT LBS	TRACER COLOR*
PD-1605	1/2"	5,800	5.5	Black
PD-2001	5/8"	8,600	8.7	Blue
PD-2405	3/4"	10,500	12.3	Orange

\*Tracer color assigned by rope diameter.

**Very Strong & Durable Rope**

*"A great everyday rope for thousands of uses. I use it for arboriculture and as a rescue rope."*

-Kirk H., Oxnard, California

**COLOR OPTIONS****BENEFITS**

- Easy Handling and Splicing
- Lightweight and Strong
- Very Little Water Absorption
- Color-Coded By Strength

**CONSTRUCTION** 3 Strand

**COVER** Polyester

**CORE** Polypropylene

**IDEAL FOR**

SAFETY LINES



RIGGING LINES



UTILITY LINES

# 3 STRAND NYLON

Pelican's 3 strand nylon is an effective, all-purpose shock absorbent rope. High strength and elasticity. Recommended for securing boats and cargo. Resistant to abrasion, sunlight, rot, mildew and many common chemicals.

SKU	DIAMETER INCHES
NY*080	1/4"
NY*100	5/16"
NY*120	3/8"
NY*160	1/2"
NY*200	5/8"
NY*240	3/4"
NY*320	1"



## BENEFITS

- Economical
- Excellent Strength
- Shock Absorbent
- Great Abrasion Resistance
- Rot and Mildew Resistant

CONSTRUCTION 3 Strand  
COVER Nylon

## IDEAL FOR



MOORING



INDUSTRIAL  
APPLICATIONS



# 3 STRAND POLYESTER

3 STRAND  
CONSTRUCTION

Pelican's 3 strand polyester rope offers durability while being high strength, less stretch than nylon and good resistance to abrasions and UV rays.

Also, it is resistant to rot, mildew and a variety of fluids and chemicals. This rope is well-suited for marine and industrial applications.

SKU	DIAMETER INCHES
PE*100	5/16"
PE*120	3/8"
PE*160	1/2"
PE*200	5/8"
PE*240	3/4"

## IDEAL FOR



MARINE

INDUSTRIAL  
APPLICATIONS

## BENEFITS

- Economical
- High Strength
- Low Elongation
- Excellent UV Resistance
- Superior Heat Resistance

CONSTRUCTION 3 Strand  
COVER Polyester



# TECHNORA PRUSIK LANYARD

## EYE-TO-EYE PRUSIK LANYARD

This prusik line with high strength Technora® is ideal for arborists and search and rescue. The lanyard is made with our high strength Technora® fibers over a nylon core. The heat resistant Technora® cover is strong and stands up to rigorous use. This line comes with 1" sewn eyes on each end and in lengths of 28", 30", 32" and 34".



SKU	DIAMETER INCHES
LYSE-11T	11/32"

## BENEFITS

- Heat Resistant
- Stronger than Double Braid
- Durable

**CONSTRUCTION** Kernmantle  
**COVER** Technora®  
**CORE** Nylon

## IDEAL FOR



HIGH FRICTION  
PRUSIK SITUATIONS



SAFETY/RESCUE  
OPERATIONS



# BETTER GRAB™ POSITIONING LANYARD



**⚠ WARNING:** Work positioning lanyard only. Not for fall arrest.

SKU	DIAMETER INCHES	END OPTIONS	
LYKM-162	1/2"	ANSI Aluminum Snap Hook	AA
		Aluminum Rebar Hook	AR
		Aluminum Twist-Lock Carabiner	AT
		Steel Snap Hook	SH
		Steel Twist-Lock Carabiner	ST

### Great Item at a Great Price

*"I needed a more flexible positioning lanyard for tower work and this style was exactly what I was looking for. The quality is excellent, it came stamped with ratings, and an instruction manual. Overall couldn't be happier with the quality."*

-Isaac U., Spokane, Washington

### IDEAL FOR



TOWER & POLE POSITIONING



UTILITY LINES

The new standard in positioning lanyards for tower and pole climbing work. This lanyard includes:

- ProClimb™ Better Grab Rope Grab.
  - Stainless steel core
  - Ergonomic, rubberized cover
  - Anodized aluminum cam
  - Large thumb rest for precise control
- 1/2" Static Master™ lanyard in lengths of: 6', 8', 10', 12' or 15'.
- Thimble
- Chafe Master™ protective abrasion sleeve.
- Variety of end options to choose from (see table for more details).

This lanyard is ANSI Z359.3 & OSHA 1910 / 1926 compliant.

### END OPTIONS



AA AR AT SH ST

### BENEFITS

- A Convenient, All-In-One Kit
- Economical
- Ideal for work positioning or restraint

CONSTRUCTION Static Kernmantle  
COVER Polyester  
CORE Nylon



# E-Z MOVE™ POSITIONING LANYARD

Our E-Z Move™ Positioning Lanyard is an easy-to-use positioning device that is lightweight and compact. This restraint device is constructed from 7/16" Static Master™ rope that allows for smooth adjustment even under load. The E-Z Move features a Kong® Trimmer rope grab that has an ergonomic design for precise control. This positioning lanyard also includes the Chafe Master™ tubular sleeve which protects the rope at contact point. The lanyard comes in several lengths and termination options to accommodate a variety of applications.

**Available lengths:**  
6', 8', 10', 12', and 15'.

This lanyard is ANSI Z359.3 & OSHA 1910 / 1926 compliant.



**⚠ WARNING:** Work positioning lanyard only. Not for fall arrest.

## END OPTIONS



AA AR AT SH ST

SKU	DIAMETER INCHES	END OPTIONS	
LYKKM-141	7/16"	ANSI Aluminum Fixed-Eye Snap Hook	AA
		Aluminum Rebar Hook	AR
		ANSI Aluminum Twist-Lock Carabiner	AT
		ANSI Steel Snap Hook	SH
		ANSI Steel Twist-Lock Carabiner	ST

## BENEFITS

- Abrasion Resistant
- Incredibly Smooth
- Lightweight

### Well-Suited for the Task

*"This positioning lanyard was just what I needed, as a wind turbine tech it fills the bill."*

-Michael D., Wellsburg, Iowa

**CONSTRUCTION** Static Kernmantle

**COVER** Polyester

**CORE** Nylon

## IDEAL FOR



TOWER & POLE POSITIONING



UTILITY LINES



# BETTER GRAB 3 POSITIONING LANYARD



**⚠ WARNING:** Work positioning lanyard only. Not for fall arrest.

With unmatched durability built for tower and pole climbing work, this lanyard features:

- ProClimb™ Better Grab Removable Rope Grab.
  - Stainless steel core
  - Ergonomic, rubberized cover
  - Anodized aluminum cam
  - Large thumb rest for precise control
- 7/16", 1/2", 5/8" Static Master™ lanyard in lengths of: 6', 8', 10', 12' or 15'.
- Thimble
- Chafe Master™ protective abrasion sleeve.
- Variety of end options to choose from (see table for more details).

This lanyard is ANSI Z359.3 & OSHA 1910 / 1926 compliant.

SKU	DIAMETER INCHES	END OPTIONS	
		Option 1	Option 2
LYK3M-14	7/16"	ANSI Aluminum Snap Hook	AA
LYK3M-16	1/2"	Aluminum Twist-Lock Carabiner	AT
LYK3M-204Y	5/8"	Steel Snap Hook	SH
		Steel Twist-Lock Carabiner	ST

## COLOR OPTIONS



## END OPTIONS



AA AT SH ST

## IDEAL FOR



TOWER & POLE  
POSITIONING

## BENEFITS

- Removable Cam
- Extended Usability
- Durable Strength

**CONSTRUCTION** Static Kernmantle

**COVER** Polyester

**CORE** Nylon



3 STRAND  
CONSTRUCTION

# RESTRAINT & POSITIONING LANYARD

ASSEMBLIES & LANYARDS // LANYARDS

When used properly, our restraint and positioning lanyard keeps you at a safe distance from edging.

It includes:

- 5/8" composite rope.
- Chafe Master™ protective abrasion sleeve.
- Proclimb™ ANSI double-locking snap hook.

This lanyard is ANSI Z359.3 & OSHA 1910 / 1926 compliant.

**Weight Capacity:** 310 lbs



**⚠ WARNING:** Work positioning lanyard only. Not for fall arrest.

SKU	DIAMETER INCHES	LENGTH FEET	WEIGHT LBS
LYTPD-2001-03FF	5/8"	3'	1.5
LYTPD-2001-04FF	5/8"	4'	1.6
LYTPD-2001-06FF	5/8"	6'	1.8

## BENEFITS

- Abrasion Resistant
- Lightweight, Yet Strong
- Very Little Water Absorption

### Great Lanyard

*"Easy to use. Placed it on an aerial lift to meet OSHA requirements. I will buy it again as needed."*

-Kyle B., Las Vegas, Nevada

CONSTRUCTION 3 Strand

COVER Polyester

## IDEAL FOR



TOWER & POLE  
POSITIONING



# ADJUSTABLE POSITIONING LANYARD



Our adjustable positioning lanyard permits you to work “hands-free” while tree rigging or scaling a tower.

It includes:

- 5/8” composite rope.
- Chafe Master™ protective abrasion sleeve.
- Proclimb™ ANSI double-locking snap hook.
- Dual-cam steel rope grab.

This lanyard is ANSI Z359.3 & OSHA 1910 / 1926 compliant.

**Weight Capacity: 310 lbs**

SKU	DIAMETER INCHES	LENGTH FEET	WEIGHT LBS
LYTPD-2001-06FT	5/8"	6'	2.5

### Highly Recommend

*“Tried and tested and works fantastic! Very good materials and stitching and construction. I’m a 230 pounder and it held my weight like a champion!”*

-Gary G., Cranston, Rhode Island



### BENEFITS

- Easy Adjustments
- Lightweight, Yet Strong
- Very Little Water Absorption

CONSTRUCTION 3 Strand  
COVER Polyester

### IDEAL FOR



TOWER & POLE  
POSITIONING



# VERTICAL LIFE LINE

## 3 STRAND VERTICAL LIFE LINE

Stay protected with the highest quality rope. Our vertical life line is one of the toughest and well-known vertical life lines available today. Pelican's 3 strand rope life lines have the durability required on the job, while remaining lightweight and allowing for a comfortable grip. It also provides good protection against abrasion and is energy absorbent. This high quality rope is made in the United States and is ANSI Z359.1-2007 certified.

Each life line is equipped with an ANSI Z359.1-2007 compliant double locking safety snap hook. Swivel snap hook or carabiner also available.

**Available lengths:**  
25', 50', 75', 100', 150', 200', 300', 350', and 600'.



SKU	DIAMETER INCHES	TENSILE STRENGTH LBS
LYTP-200	5/8"	9,000

## BENEFITS

- Economical
- Low Stretch
- Abrasion Resistant

**CONSTRUCTION** 3 Strand  
**COVER** Polyester



## IDEAL FOR



SAFETY LINES



RIGGING LINES



UTILITY LINES



# 3 STRAND COMPOSITE VERTICAL LIFE LINE



Similar to our original vertical life line but now with a 3 strand composite rope made from 100% filament polyester over a polyolefin core. Soft polyester is added to the surface to give it a better grip and abrasion protection.

Each vertical life line is ANSI Z359.1-2007 compliant and available as shown with a hook and thimble on each end or with hooks on both ends.

**Available lengths:**

25', 50', 75', 100', 150', 200', 300', 350', and 600'.

SKU	DIAMETER INCHES	TENSILE STRENGTH LBS
LYTPD-2001	5/8"	8,600



**Literal Life Saver**

*"It didn't let me fall off the side of the 5-story building I was working on, so it definitely did its job. The hasp is easy to work even with gloves."*

-Jim H., Sweetwater, Texas

**BENEFITS**

- Easy Handling and Splicing
- Light-weight and Strong
- Very Little Water Absorption

**IDEAL FOR**



SAFETY LINES



RIGGING LINES



UTILITY LINES

CONSTRUCTION 3 Strand





# BOOM TRUCK ROPE

ASSEMBLIES & LANYARDS // BOOM TRUCK WINCH LINES

DOUBLE BRAID  
CONSTRUCTION

## HIGH FORCE COMPOSITE BOOM TRUCK WINCH LINE

With shock absorption properties similar to nylon and a high tensile strength, this versatile high-performance rope offers dependability, even balance and unsurpassed resistance to abrasion, sunlight and common chemicals. Our optional urethane coating penetrates the fibers of the outer cover providing additional protection to the inner core while increasing abrasion resistance. Professionally hand-spliced eyes are added along with polyester chafe guards.

**Available lengths:**  
120' up to 300'



## COLOR OPTIONS



SKU	DIAMETER INCHES	TENSILE STRENGTH LBS	WEIGHT PER 100 FT LBS
A4N-16	1/2"	10,000	7.6
A4N-20	5/8"	16,000	9.5
A4N-24	3/4"	25,000	17.2
A4N-28	7/8"	35,000	23.7
A4N-32	1"	45,000	31
A4N-36	1 1/8"	50,000	36.1

## BENEFITS

- Long Lasting
- Absorbs Shock
- Abrasion Resistant
- High Strength

CONSTRUCTION Double Braid  
COVER Polyester  
CORE Nylon

## IDEAL FOR



BOOM TRUCK LINES



# TUBULAR CHAFE GEAR



Our most popular chafe protection, Chafe Master™ tubular chafe gear is very flexible which helps your rope to last longer and be replaced less frequently. Your hands and fingers will also appreciate the protection from cuts and scrapes!

**Available lengths: 10', 25' or 100'.**

SKU	FLAT WIDTH INCHES	INSIDE DIAMETER INCHES
CHF-TUB-1.06	1.77"	1.06"
CHF-TUB-1.22	2.05"	1.22"
CHF-TUB-1.42	2.24"	1.42"
CHF-TUB-1.57	2.60"	1.57"
CHF-TUB-1.85	3.03"	1.85"
CHF-TUB-2.36	3.82"	2.36"
CHF-TUB-2.62	4.18"	2.62"
CHF-TUB-2.87	4.65"	2.87"
CHF-TUB-3.66	5.87"	3.66"
CHF-TUB-67	1.18"	0.67"
CHF-TUB-79	1.22"	0.79"
CHF-TUB-91	1.54"	0.91"
CHF-TUB-98	1.65"	0.98"

## BENEFITS

- Offers excellent UV and abrasion protection
- Tight, smooth surface resists wearing

## IDEAL FOR



MOORING



TUG  
OPERATIONS

# REMOVABLE CHAFE GEAR

Protect your lines from wear point abrasion only like Chafe Master's™ Removable chafe gear can! It is made of Mil-Spec 1050 ballistic nylon and can be easily removed and installed. This removable chafe gear is durable and easy to install, it is the most popular choice for mooring lines and towing.

**Available lengths: 2', 3' or 4'.**

## BENEFITS

- Easy Installation and Removal for Inspection
- Mil-Spec Extreme Hook & Loop Closure
- Heavy Urethane Coating Adds Protection
- Field-Tested and Proven Abrasion Resistance
- Maximum UV Protection
- Water and Oil Resistant



## IDEAL FOR



MOORING



TOWING LINES

SKU	GUARD OUTSIDE DIAMETER INCHES	CIRCUMFERENCE INCHES	FLAT WIDTH LBS
CHF-REM-1.0	1.00"	3.14"	3.89"
CHF-REM-1.25	1.25"	3.92"	4.67"
CHF-REM-2.0	2.00"	6.28"	7.78"



# REMOVABLE EXTREME



Offering maximum protection as well as easy installation and inspection, Chafe Master™ is crafted from abrasion-resistant polyester and nylon fibers that are constructed to shield rope from abrasive conditions. For the most severe abrasion, Chafe Master™ Removable Extreme chafe gear is the right fit for the toughest jobs. Engineered to provide maximum protection. This non-wicking, heavy-duty sleeve is best for tough outdoor applications.

## BENEFITS

- Outstanding Chafe Resistance
- Heavy-weight and Tough
- Mil-Spec Hook and Loop Sewn with Spectra Thread
- Excellent UV Protection
- Excellent Puncture/Tear Protection
- Non-Wicking
- Very Good Resistance to Water, Oil and Detergents

## IDEAL FOR



OUTDOOR APPLICATIONS

SKU	GUARD OUTSIDE DIAMETER INCHES	CIRCUMFERENCE INCHES	FLAT WIDTH LBS
CHF-REM-1.75	1.80"	5.50"	7.00"
CHF-REM-2.0	2.00"	6.28"	7.78"
CHF-REM-2.38	2.40"	7.47"	8.97"



# ROPE COUNTER



## FIBER ROPE CORDAGE METER

This rope counter is an accurate, easy to use measuring machine for 3/16" to 1" diameter ropes. With one turn of the knob, the rope counter resets to zero. It features a resettable meter which reads rope in feet and inches. The rope counter's serrated wheel along with its stainless steel pressure shoe guarantees an accurate reading without the hassle of slipping.

### Accurate


*"This device is great. I bought this for when I need to splice rope. It threads the rope smoothly without slipping out. I love it."*

-Tom A., Vancouver, Washington

## BENEFITS

- Adjustable Tension Spring Setting
- Feet/Inches or Metric Meters Available
- Assures Uninterrupted, No Slip Contact with Cordage

# ELECTRIC HOT KNIFE

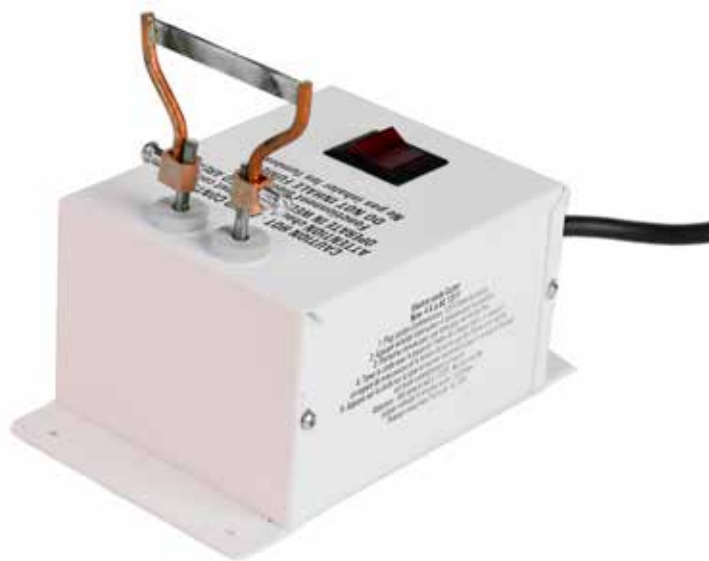

## CORDAGE CUTTER

This electric rope cutter hot knife can be used to cut through braided sleeving and rope. The table top sized hot knife simultaneously cuts and heats seals up to 1200° Fahrenheit. Other features include:

- For work bench or wall mount
- Extra blades available
- Weight: 1.5 lbs/each

### Great Working Tool

*"This very portable electric rope cutter is wonderful! It heats up fast, and cools down fast. Its blade is orange when hot, and always sharp. I use it to cut nylon rope accurately and safely. As it cuts through the nylon, the heat seals the rope so that it doesn't unravel."*

-Dan M., Phoenix, Arizona

## BENEFITS

- Built for Continuous Use
- Cuts and Seals Synthetic Rope up to 7/8" Diameter
- Simultaneously Cuts & Seals



# ROPE BAG



## HEAVY-DUTY ROPE BACK PACK

Our heavy-duty rope bag is comfortable, durable and lightweight and can carry up to 200 feet of rope and/or hardware. Its adjustable padded shoulder straps provide extra comfort for carrying heavy equipment. The rope bag also includes high quality main pocket and front pocket zippers with sturdy handle for easy pick up as well as front MOLLE compatible webbing attachments.

- Dimensions 10.8" x 20" x 8.3"
- Washable

### More Than Meets the Eye

*"Fits my rope and gear, and it's comfortable enough to wear even with the weight. I love Pelican Rope. It's the best bag for climbers."*

-Gary J., San Antonio, Texas

## BENEFITS

- 900D Denier Construction
- Dual Side Water Pockets

# FALL PROTECTION



**U.S. RIGGING**  
**S U P P L Y**  
*Powered by service. Driven by quality.*

## THE **ProClimb® DIFFERENCE**

### 100% TESTING!

Climb with confidence! ProClimb builds gear you can trust. We believe one good test is better than a thousand expert opinions, that's why we test our products to ensure reliability of every ProClimb product. Every piece of ProClimb climbing gear is tested (not just sampled), 100% factory proof tested! In addition, we use independent laboratories, such as UL, to certify our products. We also break test samples from every single production lot upon receipt.

### EXPERIENCE YOU CAN COUNT ON

With over 40 years of experience serving professional climbers, you can count on our experienced and knowledgeable team.

### EXCEPTIONAL VALUE

We know people who climb for a living need value they can trust. Every one of our ProClimb products provides industry-leading quality, testing, experience, and cost. You might find gear for less, but you won't find better value than ProClimb.



### LOOK FOR THIS EMBLEM!

Want to evaluate our products yourself? You can find our logo next to each of our products and learn more about the specifications of our equipment to see what suits you best.



**WARNING:** Climbing is dangerous, and you should always climb within your ability, after carefully judging the safety of the route. Failure for you to follow these conditions may result in injury or death. CLIMBING IS AN INHERENTLY DANGEROUS ACTIVITY that may result in serious injury or death.

The equipment in this section has been designed and manufactured for use by experienced professionals only. Serious injury or death may result from the improper use of this equipment. DO NOT ATTEMPT TO USE THIS EQUIPMENT WITHOUT PROPER TRAINING. Use, inspect, and repair only in accordance with manufacturer's instructions. Failure to follow these instructions could result in serious injury or death.

## TERM DEFINITIONS

**Fall Protection** - The backup system planned for a worker who could lose his or her balance at height, in order to control or eliminate injury potential.

**Minimum Breaking Strength (MBS)** - The minimum amount of force required to break this object. Often referred to as tensile strength or breaking strength. Not to be confused with "Working Load Limit" or "Yield Strength".

**kN (Kilonewton) Rating** - A kilonewton (kN) is roughly the equivalent of 225 lbs, which is a force of gravity rating, not static weight or mass. All climbing equipment has a certain rating of force it can withstand, and that rating is typically referred to as a kN rating. If you have carabiners or snaphooks without a kN rating DO NOT use them for climbing as they are most likely unintended for human support / fall protection.

**Fall Arrest** - The act of stopping a free-fall.

**Free Fall** - The act of falling before a personal fall arrest system begins to arrest the fall.

**Clearance** - To determine the required fall clearance add the appropriate factors together, this will give you the safe required distance (RD) below the working surface for work which is to be carried out where there is any risk of falling.

**Calculation** - Free fall distance energy absorber deceleration distance clearance to obstruction during fall arrest.

**Span** - The distance between intermediates for a horizontal lifeline system.

**Standards (CE, OSHA, ANSI, CSA, NFPA)** - Mandatory requirements or recommendations to follow as determined by governments and organizations: Conformité Européenne (CE), Occupational Safety & Health Administration (OSHA), American National Standards Institute (ANSI), Canadian Standards Association (CSA), National Fire Protection Association (NFPA).






ProClimb®

USR-12-CTLD

**EQUAL D STEEL CARABINER**



A	B	ØC
104 mm	56 mm	14 mm

- Twist Lock Gate
- High Tensile Steel
- Zinc Plated
- Keylock


<b>GATE</b>	16kN	↻ 13kN
<b>MBS</b>	↔ 45kN	↕ 16kN
<b>WT.</b>	7.6 oz	



ProClimb®

USR-12-CTLM

**MODIFIED D STEEL CARABINER**



A	B	ØC
110 mm	68 mm	20 mm

- Twist Lock Gate
- High Tensile Steel
- Zinc Plated
- Keylock


<b>GATE</b>	16kN	↻ 12kN
<b>MBS</b>	↔ 50kN	↕ 16kN
<b>WT.</b>	9.0 oz	



ProClimb®

USR-12-CTLM-BK

**MODIFIED D STEEL CARABINER**



A	B	ØC
110 mm	68 mm	20 mm

- Twist Lock Gate
- High Tensile Steel
- Zinc Plated
- Keylock


<b>GATE</b>	16kN	↻ 12kN
<b>MBS</b>	↔ 50kN	↕ 16kN
<b>WT.</b>	9.0 oz	



ProClimb®

USR-12-CTL

**KLETTERSTEIG STEEL CARABINER**



A	B	ØC
124 mm	79 mm	27 mm


- Twist Lock Gate
- High Tensile Steel
- Zinc Plated
- Keylock

<b>GATE</b>	16kN	↻ 15kN
<b>MBS</b>	↔ 45kN	↕ 16kN
<b>WT.</b>	9.9 oz	





ProClimb®



USR-71-C09A  
**STEEL LADDER  
HOOK W/ CAPTIVE  
PIN**


- Twist Lock Gate
- High Tensile Steel
- Zinc Plated
- Keylock

A	B	ØC
177 mm	94 mm	48 mm

<b>GATE</b>	16kN
<b>MBS</b>	↔ 40kN
<b>WT.</b>	15.7 oz



ProClimb®



USR-04-C09B  
**FORGED  
SCAFFOLD  
LADDER HOOK W/  
CAPTIVE PIN**


- Twist Lock Gate
- High Tensile Steel
- Zinc Plated

A	B	ØC	D
222.1 mm	142.5 mm	54 mm	206.5 mm

<b>GATE</b>	16kN
<b>MBS</b>	↔ 50kN
<b>WT.</b>	27.8 oz



ProClimb®



USR-14-C9Y  
**FIXED EYE STEEL  
CARABINER**

- Twist Lock Gate
- Alloy Steel
- Zinc Plated

A	B	ØC
134 mm	75 mm	20 mm

<b>GATE</b>	16kN
<b>MBS</b>	↔ 23kN
<b>WT.</b>	10.7 oz




USR-71N-C09A  
**STEEL LADDER  
HOOK W/  
CAPTIVE PIN**

- Twist Lock Gate
- High Tensile Steel
- Zinc Plated
- Keylock



ProClimb®



<b>GATE</b>	16kN
<b>MBS</b>	↔ 40kN
<b>WT.</b>	15.7 oz

A	B	ØC
177 mm	94 mm	48 mm

NFPA 1983-G & ANSI Z359.12-2009




USR-71N-C09AB  
**STEEL LADDER  
HOOK W/  
CAPTIVE PIN**

- Twist Lock Gate
- High Tensile Steel
- Zinc Plated
- Keylock



ProClimb®



<b>GATE</b>	16kN
<b>MBS</b>	↔ 40kN
<b>WT.</b>	15.7 oz


A	B	ØC
177 mm	94 mm	48 mm

NFPA 1983-G & ANSI Z359.12-2009





**ProClimb**



### USR-71-CTL FIRE FIGHTER HOOK W/ CAPTIVE PIN

- Twist Lock Gate
- High Tensile Steel
- Zinc Plated Finish


A	B	ØC
177 mm	94 mm	44 mm

<b>MBS</b>	↔ 40kN
<b>WT.</b>	14.4 oz



### USR-98-C09A LARGE D STEEL CARABINER

- Twist Lock Gate
- High Tensile Steel
- Zinc Plated Finish
- Keylock



<b>GATE</b>	16kN	↻ 16kN
<b>MBS</b>	↔ 60kN	↕ 16kN
<b>WT.</b>	11.3 oz	

A	B	ØC
128 mm	71 mm	30 mm


NFPA 1983-G & ANSI Z359.12-2009

**ProClimb**



### USR-98-C09AB LARGE D STEEL CARABINER

- Twist Lock Gate
- High Tensile Steel
- Zinc Plated Finish
- Keylock



<b>GATE</b>	16kN	↻ 16kN
<b>MBS</b>	↔ 60kN	↕ 16kN
<b>WT.</b>	11.3 oz	

A	B	ØC
128 mm	71 mm	30 mm

NFPA 1983-G & ANSI Z359.12-2009

**ProClimb**



### KNG-411-TZ XL STEEL CARABINER

- Twist Lock Gate
- Carbon Steel
- Keylock



<b>MBS</b>	↔ 50kN	↕ 20kN
<b>WT.</b>	8.5 oz	

L	W	GATE Ø
114 mm	76.5 mm	25 mm

ANSI Z359.12-2009



### KNG-412-TZ OVALONE CARABINER

- Twist Lock Gate
- Carbon Steel
- Keylock



<b>GATE</b>	16kN
<b>MBS</b>	↔ 40kN
<b>WT.</b>	7.8 oz


L	W	GATE Ø
110 mm	62.6 mm	21 mm

ANSI Z359.12-2009



### USR-98-C09T LARGE D STEEL CARABINER

- Triple Lock Gate
- High Tensile Steel
- Zinc Plated Finish
- Keylock



<b>GATE</b>	16kN	↻ 16kN
<b>MBS</b>	↔ 60kN	↕ 16kN
<b>WT.</b>	11.3 oz	

A	B	ØC
128 mm	71 mm	31 mm


NFPA 1983-G & ANSI Z359.12-2009

**ProClimb**



### USR-98-C09TB LARGE D STEEL CARABINER

- Triple Lock Gate
- High Tensile Steel
- Zinc Plated Finish
- Keylock



<b>GATE</b>	16kN	↻ 16kN
<b>MBS</b>	↔ 60kN	↕ 16kN
<b>WT.</b>	11.3 oz	


A	B	ØC
128 mm	71 mm	31 mm

NFPA 1983-G & ANSI Z359.12-2009

**ProClimb**



**USR-14-C3T**  
**FORGED STEEL**  
**CARABINER**



- Triple Lock Gate
- High Tensile Steel
- Zinc Plated Finish
- Keylock

**GATE** 5,000 lbs  
**MBS** ◀ 45kN  
**WT.** 11.0 oz

A	B	ØC	ØD
139 mm	77 mm	20 mm	29 mm



ANSI Z359.12-2009



**KNG-412-OZ**  
**OVALONE**  
**CARABINER**



- Triple Lock Gate
- Carbon Steel
- Keylock

**MBS** ◀ 40kN ◄ 20kN  
**WT.** 7.8 oz


L	W	GATE Ø
110 mm	62.6 mm	19 mm



ANSI Z359.12-2009



**USR-71-C09B**  
**STEEL LADDER**  
**HOOK W/**  
**CAPTIVE PIN**



- Triple Lock Gate
- High Tensile Steel
- Zinc Plated Finish
- Keylock

**GATE** 16kN  
**MBS** ◀ 40kN  
**WT.** 15.8 oz

A	B	ØC
177 mm	94 mm	48 mm



ANSI Z359.12-2009



**KNG-511-SN**  
**XL INOX STEEL**  
**CARABINER**



- Triple Lock Gate
- Stainless Steel
- Keylock

**MBS** ◀ 35kN ◄ 11kN  
**WT.** 8.8 oz

L	W	GATE Ø
114 mm	76.5 mm	26 mm



**KNG-411-OZ**  
**XL STEEL**  
**CARABINER**



- Triple Lock Gate
- Carbon Steel
- Keylock

**MBS** ◀ 50kN ◄ 20kN  
**WT.** 8.5 oz

L	W	GATE Ø
114 mm	76.5 mm	26 mm



ANSI Z359.12-2009




**USR-98-C09S**  
**LARGE D STEEL**  
**CARABINER**



- Screw Lock Gate
- High Tensile Steel
- Zinc Plated Finish
- Keylock

**GATE** ↻ 16kN  
**MBS** ◀ 60kN ◄ 16kN  
**WT.** 9.7 oz



A	B	ØC
128 mm	71 mm	31 mm



NFPA 1983-G



**KNG-411-SN**  
**XL CARBON**  
**STEEL**  
**CARABINER**



- Triple Lock Gate
- Carbon Steel
- Keylock

**MBS** ◀ 50kN ◄ 13kN  
**WT.** 8.5 oz

L	W	GATE Ø
114 mm	76.5 mm	27 mm




**USR-98-C09SB**  
**LARGE D STEEL**  
**CARABINER**



- Screw Lock Gate
- High Tensile Steel
- Zinc Plated Finish
- Keylock

**GATE** ↻ 16kN  
**MBS** ◀ 60kN ◄ 16kN  
**WT.** 9.7 oz




A	B	ØC
128 mm	71 mm	31 mm



NFPA 1983-G



**USR-71-CTS**  
**STEEL LADDER**  
**HOOK W/**  
**CAPTIVE PIN**



- Screw Lock Gate
- High Tensile Steel
- Zinc Plated Finish
- Keylock

**MBS** ⚡ 40kN  
**WT.** 13.7 oz

A	B	ØC
177 mm	94 mm	48 mm



**KNG-462-C1**  
**CLASSIC**  
**OVAL STEEL**  
**CARABINER**




- Screw Lock Gate
- Carbon Steel
- Keylock

**GATE** ⤴ 7kN  
**MBS** ⚡ 24kN ⚡ 10kN  
**WT.** 5.0 oz

L	W	GATE Ø
106.5 mm	54 mm	16 mm



**USR-71-CTSB**  
**STEEL LADDER**  
**HOOK W/**  
**CAPTIVE PIN**



- Screw Lock Gate
- High Tensile Steel
- Zinc Plated Finish
- Keylock

**MBS** ⚡ 40kN  
**WT.** 13.7 oz

A	B	ØC
177 mm	94 mm	48 mm



**KNG-511-L3**  
**XL INOX**  
**RESCUE STEEL**  
**CARABINER**



- Screw Lock Gate
- Stainless Steel
- Keylock

**MBS** ⚡ 35kN ⚡ 11kN  
**WT.** 8.8 oz

L	W	GATE Ø
114 mm	76.5 mm	26 mm



**KNG-412-L1**  
**OVALONE**  
**CARBON STEEL**  
**CARABINER**




- Screw Lock Gate
- Carbon Steel
- Keylock

**GATE** ⤴ 12kN  
**MBS** ⚡ 40kN ⚡ 15kN  
**WT.** 7.2 oz

L	W	GATE Ø
110 mm	62.6 mm	21 mm



**USR-67**  
**MODIFIED D**  
**CARABINER W/**  
**CAPTIVE PIN**



- Bent Gate
- High Tensile Steel
- Zinc Plated Finish
- Keylock

**GATE** ⤴ 12kN  
**MBS** ⚡ 40kN ⚡ 15kN  
**WT.** 7.2 oz

A	B	ØC
104 mm	60 mm	24.5 mm



**KNG-411-L1**  
**XL CARBON**  
**STEEL**  
**CARABINER**



- Screw Lock Gate
- Carbon Steel
- Keylock

**GATE** ⤴ 20kN  
**MBS** ⚡ 50kN ⚡ 13kN  
**WT.** 8.5 oz

L	W	GATE Ø
114 mm	76.5 mm	26.5 mm



**KNG-567-10**  
**CROSS BAR**  
**CARABINER**




- Straight Gate
- Stainless Steel
- Keylock

**GATE** ⤴ 8kN  
**MBS** ⚡ 24kN ⚡ 7kN  
**WT.** 4.5 oz

L	W	GATE Ø
99 mm	56 mm	18 mm





**USR-14-ATL  
MODIFIED  
D RESCUE  
CARABINER**

- Twist Lock Gate
- Aluminum Alloy
- Anodized


A	B	ØC
110 mm	67.6 mm	21 mm

<b>MBS</b>	↔ 25kN
<b>WT.</b>	3.0 oz



**USR-19-AT9  
I-BEAMER  
CARABINER**

- Twist Lock Gate
- Aluminum Alloy
- Anodized
- Keylock



<b>GATE</b>	16kN	↻ 8kN
<b>MBS</b>	↔ 27kN	↕ 16kN
<b>WT.</b>	4.1 oz	


A	B	ØC
177 mm	77 mm	18 mm

NFPA 1983 & ANSI Z359.12-2009



**USR-14-A9Y  
ALUMINUM  
CARABINER W/  
FIXED EYE**

- Twist Lock Gate
- Aluminum Alloy
- Anodized



<b>GATE</b>	16kN
<b>MBS</b>	↔ 35kN
<b>WT.</b>	5.3 oz

A	B	ØC	ØD
141 mm	81 mm	25 mm	23 mm

ANSI Z359.12-2009



**USR-12-ATL  
HMS ALUMINUM  
CARABINER**

- Twist Lock Gate
- Aluminum Alloy
- Anodized



<b>GATE</b>	16kN
<b>MBS</b>	↔ 23kN
<b>WT.</b>	4.8 oz


A	B	ØC
122 mm	79.1 mm	19 mm

ANSI Z359.12-2009



**USR-12D-ATLY  
ALUMINUM  
ALLOY  
CARABINER**

- Twist Lock Gate
- Aluminum Alloy
- Anodized



<b>GATE</b>	16kN
<b>MBS</b>	↔ 23kN
<b>WT.</b>	5.1 oz


A	B	ØC
124 mm	76 mm	20 mm

ANSI Z359.12-2009



**USR-14-ATL9  
FORGED ALUM.  
CARABINER W/  
FIXED EYE**

- Twist Lock Gate
- Aluminum Alloy
- Anodized



<b>GATE</b>	16kN
<b>MBS</b>	↔ 25kN
<b>WT.</b>	5.6 oz


A	B	ØC	ØD
144.2 mm	76.8 mm	19 mm	30 mm

ANSI Z359.12-2009



**USR-117-ATL  
MODIFIED D  
ALUMINUM  
CARABINER**

- Twist Lock Gate
- Aluminum Alloy
- Anodized
- Keylock



<b>MBS</b>	↔ 28kN	↕ 8kN
<b>WT.</b>	3.0 oz	


A	B	ØC
112 mm	72 mm	22 mm

NFPA 1983-T



**USR-19-ATL  
I-BEAMER  
CARABINER LITE**

- Twist Lock Gate
- Aluminum Alloy
- Anodized
- Keylock

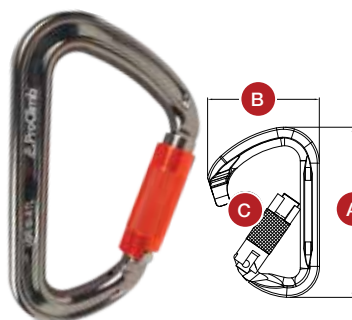

**GATE** ↻ 8kN  
**MBS** ↔ 27kN ↕ 9kN  
**WT.** 3.6 oz

A	B	ØC
117 mm	77 mm	23 mm

NFPA 1983



**KNG-786-SN  
HMS PEAR  
CARABINER**

- Triple Lock Gate
- Aluminum Alloy
- Keylock



**MBS** ↔ 22kN ↕ 8kN  
**WT.** 3.4 oz


L	W	GATE Ø
116 mm	78 mm	23 mm

ANSI Z359.1-2007 / Z359.12-2009




**USR-107-A3TU  
ALUMINUM BIG D  
CARABINER**

- Triple Lock Gate
- Aluminum Alloy
- Anodized
- Keylock



A	B	ØC
112 mm	72 mm	22 mm

**MBS** ↔ 28kN ↕ 8kN  
**WT.** 3.0 oz




**USR-128-A3TU  
COPPER HEAD  
CARABINER**

- Triple Lock Gate
- Aluminum Alloy
- Anodized
- Keylock


A	B	ØC
114 mm	73 mm	23 mm

**MBS** ↔ 24kN ↕ 8kN  
**WT.** 3.4 oz



**USR-19-A3T9  
I-BEAMER  
CARABINER**

- Triple Lock Gate
- Aluminum Alloy
- Anodized
- Keylock

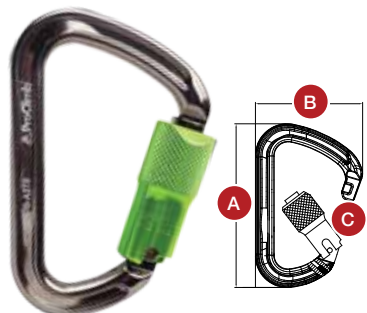

**GATE** ↻ 16kN ↻ 8kN  
**MBS** ↔ 27kN ↕ 16kN  
**WT.** 4.1 oz

A	B	ØC
117 mm	77 mm	18 mm

NFPA 1983 & ANSI Z359.1-2009



**USR-19-A3T  
I-BEAMER  
CARABINER LITE**

- Triple Lock Gate
- Aluminum Alloy
- Anodized
- Keylock




**GATE** ↻ 8kN  
**MBS** ↔ 27kN ↕ 9kN  
**WT.** 3.4 oz

A	B	ØC
117 mm	77 mm	23 mm

NFPA 1983



USR-221-A3TU  
**ALUMINUM SWIVEL CARABINER**



- Triple Lock Gate
- Aluminum Alloy
- Anodized
- Keylock

**MBS** ◀ 25kN  
**WT.** 6.0 oz

A	B	ØC
180 mm	76 mm	20 mm



KNG-712-SN  
**OVALONE ALUMINUM CARABINER**




- Triple Lock Gate
- Aluminum Alloy
- Keylock

**MBS** ◀ 26kN ▶ 9kN  
**WT.** 2.8 oz

L	W	GATE Ø
110 mm	62.6 mm	21 mm



USR-140-A3TU  
**ALUMINUM CARABINER W/ FIXED EYE**



- Triple Lock Gate
- Aluminum Alloy
- Anodized
- Keylock

**MBS** ◀ 28kN  
**WT.** 3.9 oz

A	B	ØC	ØD
140 mm	79 mm	22 mm	22 mm



KNG-778-SN  
**FERRATA CARABINER**




- Triple Lock Gate
- Aluminum Alloy
- Keylock

**MBS** ◀ 30kN ▶ 8kN  
**WT.** 3.4 oz

L	W	GATE Ø
117.5 mm	80 mm	26 mm



USR-127-A3TU  
**TRUE OVAL ALUMINUM CARABINER**



- Triple Lock Gate
- Aluminum Alloy
- Anodized
- Keylock

**MBS** ◀ 5,000 lbs ▶ 7kN  
**WT.** 2.9 oz

A	B	ØC
111 mm	60.5 mm	19 mm



KNG-911-SN  
**XL ALUMINUM RESCUE CARABINER**




- Triple Lock Gate
- Aluminum Alloy
- Keylock

**MBS** ◀ 30kN ▶ 9kN  
**WT.** 3.4 oz

L	W	GATE Ø
114 mm	76.5 mm	26 mm



USR-125-A3TU  
**FORGED HMS CARABINER**



- Triple Lock Gate
- Aluminum Alloy
- Anodized
- Keylock

**MBS** ◀ 22kN\* ▶ 9kN  
**WT.** 3.1 oz  
*\*22kN is equivalent to 5,000 lbs*

A	B	ØC
118 mm	78 mm	26 mm



KNG-730-A1  
**OVAL CLASSIC CARABINER**



- Screw Lock Gate
- Aluminum Alloy
- Keylock

**GATE** ◀ 7kN  
**MBS** ◀ 22kN ▶ 7kN  
**WT.** 2.3 oz

L	W	GATE Ø
105 mm	54 mm	16 mm





**KNG-733-A1**  
**GUIDE**  
**CARABINER**

- Screw Lock Gate
- Aluminum Alloy
- Keylock



<b>GATE</b>	↻ 10kN
<b>MBS</b>	↔ 30kN ↕ 10kN
<b>WT.</b>	2.5 oz

L	W	GATE Ø
110 mm	62.6 mm	19 mm



**KNG-911-A1**  
**XL ALUMINUM**  
**RESCUE**  
**CARABINER**

- Screw Lock Gate
- Aluminum Alloy
- Keylock



<b>MBS</b>	↔ 30kN ↕ 9kN
<b>WT.</b>	3.4 oz

L	W	GATE Ø
114 mm	78 mm	23 mm



**KNG-778-A1**  
**FERRATA**  
**CARABINER**

- Screw Lock Gate
- Aluminum Alloy
- Keylock




<b>GATE</b>	↻ 12kN
<b>MBS</b>	↔ 30kN ↕ 10kN
<b>WT.</b>	3.2 oz

L	W	GATE Ø
117.5 mm	80 mm	27 mm



**USR-121-ABUU**  
**HMS ALUMINUM**  
**CARABINER**

- Bent Gate
- Aluminum Alloy
- Anodized

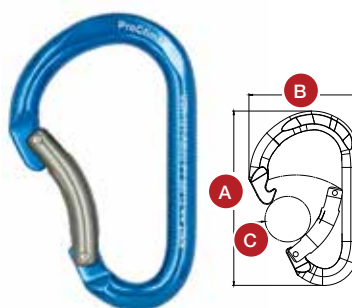

<b>MBS</b>	↔ 25kN
<b>WT.</b>	oz

A	B	ØC
118.7 mm	75.4 mm	31 mm



**KNG-778-G1**  
**FERRATA**  
**EXPRESS**  
**CARABINER**

- Slide Lock Gate
- Aluminum Alloy
- Keylock



<b>GATE</b>	↻ 12kN
<b>MBS</b>	↔ 30kN ↕ 10kN
<b>WT.</b>	3.2 oz

L	W	GATE Ø
117.5 mm	80 mm	27 mm



**USR-127-AU**  
**TRUE OVAL**  
**ALUMINUM**  
**CARABINER**

- Straight Gate
- Aluminum Alloy
- Anodized
- Keylock



<b>GATE</b>	↻ 7kN
<b>MBS</b>	↔ 5,000 lbs ↕ 7kN
<b>WT.</b>	2.4 oz

A	B	ØC
111 mm	60.5 mm	22 mm



**KNG-786-A1**  
**HMS PEAR**  
**CARABINER**

- Screw Lock Gate
- Aluminum Alloy
- Keylock



<b>MBS</b>	↔ 22kN ↕ 8kN
<b>WT.</b>	3.4 oz

L	W	GATE Ø
116 mm	78 mm	25 mm



**USR-109P**  
**MICRO 900**  
**CARABINER**


- Straight Gate
- Aluminum Alloy
- Anodized
- 900 lb Tensile Strength




<b>MBS</b>	↔ 4kN
<b>WT.</b>	0.4 oz

\*4kN is equivalent to 900 lbs

A	B	GATE Ø
57.1 mm	33.3 mm	12 mm



USR-109BL  
**MICRO 900  
CARABINER**

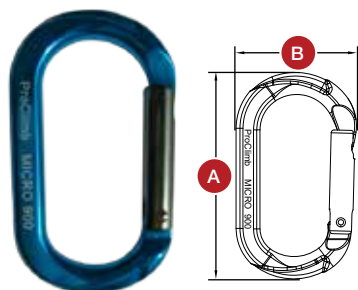

- Straight Gate
- Aluminum Alloy
- Anodized
- 900 lb Tensile Strength

**MBS** ◀ 4kN\*  
**WT.** 0.4 oz

\*4kN is equivalent to 900 lbs

A	B	GATE Ø
57.1 mm	33.3 mm	12 mm

**⚠ WARNING:** Not for human support.

KNG-901  
**PADDLE  
CARABINER**




- Wire Bent Gate
- Aluminum Alloy

**GATE** ⤴ 7kN  
**MBS** ◀ 22kN ⚡ 8kN  
**WT.** 2.8 oz

L	W	GATE Ø
116 mm	75 mm	32 mm



USR-109G  
**MICRO 900  
CARABINER**

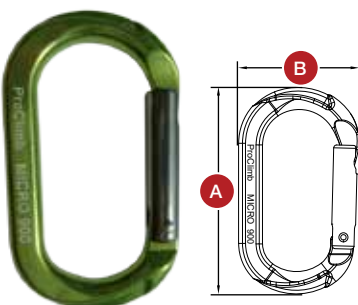

- Straight Gate
- Aluminum Alloy
- Anodized
- 900 lb Tensile Strength

**MBS** ◀ 4kN\*  
**WT.** 0.4 oz

\*4kN is equivalent to 900 lbs

A	B	GATE Ø
57.1 mm	33.3 mm	12 mm

**⚠ WARNING:** Not for human support.

KNG-710  
**OVAL ALUMINUM  
CARABINER**



- Bent Gate
- Aluminum Alloy
- Keylock

**GATE** ⤴ 7kN  
**MBS** ◀ 22kN ⚡ 7kN  
**WT.** 2.1 oz

L	W	GATE Ø
105 mm	54 mm	16 mm



KAA-60-08  
**TOOL  
ACCESSORY  
CARABINER**



- Straight Gate
- Aluminum Alloy
- Anodized
- Mixed Color Assortment

**WT.** oz

L	W	GATE Ø
60.7 mm	31.2 mm	13.5 mm

**⚠ WARNING:** Not for human support.

KNG-751  
**MINI D  
CARABINER**



- Straight Gate
- Aluminum Alloy
- Keylock

**MBS** ◀ 6kN  
**WT.** 1.1 oz

L	W	GATE Ø
80 mm	44 mm	15 mm

**⚠ WARNING:** Not for human support.

KNG-265  
**PADDLE  
CARABINER**



- Bent Gate
- Aluminum Alloy
- Keylock

**GATE** ⤴ 7kN  
**MBS** ◀ 22kN ⚡ 8kN  
**WT.** 2.8 oz

L	W	GATE Ø
116 mm	75 mm	32 mm



KNG-713  
**GUIDE  
CARABINER**



- Straight Gate
- Aluminum Alloy
- Keylock

**GATE** ⤴ 10kN  
**MBS** ◀ 30kN ⚡ 10kN  
**WT.** 2.3 oz

L	W	GATE Ø
110 mm	62.5 mm	22 mm






ProClimb

USR-01-CF09B

- Double Action Gate
- High Tensile Steel
- Zinc Plated

**STEEL SNAPHOOK**



A	B	ØC	ØD
140 mm	66 mm	20 mm	25 mm

<b>GATE</b>	16kN
<b>MBS</b>	↔ 23kN
<b>WT.</b>	10.3 oz

ANSI Z359.1-2009  
 ANSI CE EN362 C US ANSI Z359.12 CSA Z259.12




ProClimb

USR-01-CF07

- Double Action Gate
- High Tensile Steel
- Zinc Plated

**STEEL SNAPHOOK W/ FIXED EYE**



A	B	ØC
145 mm	22 mm	29 mm

<b>GATE</b>	16kN
<b>MBS</b>	↔ 45kN
<b>WT.</b>	12.2 oz

ANSI Z359.1-2009  
 ANSI CE EN362 C US ANSI Z359.12 CSA Z259.12




ProClimb

USR-01-CF09

- Double Action Gate
- High Tensile Steel
- Zinc Plated

**FORGED STEEL SNAPHOOK W/ FIXED EYE**



A	B	ØC	ØD
145 mm	75 mm	22 mm	29 mm

<b>GATE</b>	16kN
<b>MBS</b>	↔ 23kN
<b>WT.</b>	12.6 oz

ANSI Z359.1-2009  
 ANSI CE EN362 C US ANSI Z359.12 CSA Z259.12




ProClimb

USR-02-CS07

- Double Action Gate
- High Tensile Steel
- Zinc Plated


**FORGED STEEL SWIVEL SNAPHOOK**



A	B	ØC	ØD
183 mm	22 mm	27 mm	25 mm

<b>GATE</b>	16kN
<b>MBS</b>	↔ 50kN
<b>WT.</b>	17.8 oz

ANSI Z359.1-2009  
 ANSI CE EN362 C US ANSI Z359.12 CSA Z259.12





USR-02-CS09B  
**FORGED  
STEEL SWIVEL  
SNAPHOOK**

A	B	ØC
185.4 mm	73 mm	21 mm

- Double Action Gate
- High Tensile Steel
- Zinc Plated

<b>GATE</b>	16kN
<b>MBS</b>	↔ 23kN
<b>WT.</b>	16.9 oz

ANSI Z359.1-2009





USR-BRH-C09B  
**FORGED STEEL  
REBAR HOOK W/  
FIXED EYE**

A	B	ØC	ØD
219 mm	133 mm	58 mm	25.6 mm

- Double Action Gate
- High Tensile Steel
- Zinc Plated

<b>GATE</b>	16kN
<b>MBS</b>	↔ 40kN
<b>WT.</b>	21.0 oz

ANSI Z359.1-2009





USR-BRH-SC09  
**STEEL SWIVEL  
LADDER HOOK**

A	B	ØC	ØD
294 mm	124 mm	60 mm	25.5 mm

- Double Action Gate
- High Tensile Steel
- Zinc Plated

<b>GATE</b>	16kN
<b>MBS</b>	↔ 45kN
<b>WT.</b>	31.0 oz

ANSI Z359.1-2009




USR-BRH-C09  
**FORGED STEEL  
REBAR HOOK W/  
FIXED EYE**


A	B	ØC	ØD
236 mm	125 mm	60 mm	25 mm

- Double Action Gate
- High Tensile Steel
- Zinc Plated

<b>GATE</b>	16kN
<b>MBS</b>	↔ 50kN
<b>WT.</b>	27.3 oz

ANSI Z359.1-2009






**USR-16-CDL  
FORGED STEEL  
SPREADER  
SNAPHOOK**

- Double Action Gate
- High Tensile Steel
- Zinc Plated

A	B	ØC	ØD
245 mm	73 mm	21 mm	29.8 mm

<b>GATE</b>	16kN
<b>MBS</b>	↔ 23kN
<b>WT.</b>	25.6 oz




**USR-16S-CDL  
STEEL SPREADER  
SNAPHOOK -  
ECONOMY**

- Double Action Gate
- High Tensile Steel
- Zinc Plated
- Thin Profile

A	B	ØC	ØD
245 mm	66 mm	22 mm	29 mm

<b>GATE</b>	16kN
<b>MBS</b>	↔ 23kN
<b>WT.</b>	23.6 oz




**USR-01-CFE  
STEEL SPREADER  
SNAPHOOK W/  
FIXED EYE**

- Double Action Gate
- High Tensile Steel
- Zinc Plated

A	B	ØC	ØD
141 mm	57.6 mm	18 mm	25 mm

<b>MBS</b>	↔ 23kN
<b>WT.</b>	10.4 oz



**USR-02-CSE  
FORGED  
STEEL SWIVEL  
SNAPHOOK**

- Double Action Gate
- High Tensile Steel
- Zinc Plated


A	B	ØC	ØD
184 mm	25.8 mm	19 mm	37 mm

<b>MBS</b>	↔ 23kN
<b>WT.</b>	13.6 oz





ProClimb




USR-50-AB  
**FORGED ALUM.  
SNAPHOOK W/  
FIXED EYE**


- ☉ Double Action Gate
- ☉ Aluminum Alloy
- ☉ Anodized

A	B	ØC	ØD
157 mm	69 mm	19 mm	26 mm

<b>MBS</b>	↔ 27kN
<b>WT.</b>	5.7 oz

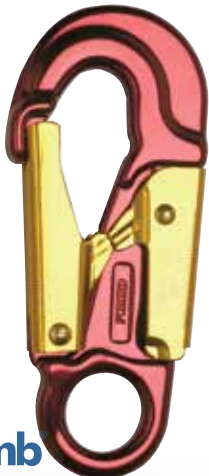

ProClimb



USR-50-AR  
**FORGED ALUM.  
SNAPHOOK W/  
FIXED EYE**


- ☉ Double Action Gate
- ☉ Aluminum Alloy
- ☉ Anodized

A	B	ØC	ØD
157 mm	69 mm	19 mm	26 mm

<b>MBS</b>	↔ 27kN
<b>WT.</b>	5.7 oz



ProClimb



USR-50-ABK  
**FORGED ALUM.  
SNAPHOOK W/  
FIXED EYE**

- ☉ Double Action Gate
- ☉ Aluminum Alloy
- ☉ Anodized

A	B	ØC	ØD
157 mm	69 mm	19 mm	26 mm


<b>MBS</b>	↔ 27kN
<b>WT.</b>	5.7 oz

USR-59-AY  
**FORGED  
ALUMINUM  
SNAPHOOK**

- ☉ Double Action Gate
- ☉ Aluminum Alloy
- ☉ Anodized



ProClimb



<b>GATE</b>	16kN
<b>MBS</b>	↔ 23kN
<b>WT.</b>	8.9 oz

A	B	ØC
152 mm	20.1 mm	26 mm

ANSI Z359.1-2009




USR-BRHA-9Y  
**ALUMINUM  
REBAR HOOK W/  
FIXED EYE**

- ☉ Double Action Gate
- ☉ Aluminum Alloy
- ☉ Anodized



ProClimb




<b>GATE</b>	16kN
<b>MBS</b>	↔ 23kN
<b>WT.</b>	24.7 oz

A	B	ØC
248 mm	135 mm	60 mm

ANSI Z359.1-2009






USR-LDR-A  
**ALUMINUM  
 LADDER HOOK W/  
 FIXED EYE**

- Double Action Gate
- Aluminum

A	B	ØC
238 mm	115 mm	60 mm

<b>MBS</b>	↔ 25kN
<b>WT.</b>	16.8 oz




USR-143-ABU  
**ALUM. SAFETY  
 SNAPHOOK W/  
 FIXED EYE**

- Triple Action Gate
- Aluminum Alloy
- Anodized

A	B	ØC
140 mm	71 mm	23.5 mm

<b>GATE</b>	↻ 12kN
<b>MBS</b>	↔ 30kN ↕ 10kN
<b>WT.</b>	4.7 oz




USR-143-ARD  
**ALUM. SAFETY  
 SNAPHOOK W/  
 FIXED EYE**

- Triple Action Gate
- Aluminum Alloy
- Anodized

A	B	ØC
140 mm	71 mm	23.5 mm

<b>GATE</b>	↻ 12kN
<b>MBS</b>	↔ 30kN ↕ 10kN
<b>WT.</b>	4.7 oz




USR-143-ABK  
**ALUM. SAFETY  
 SNAPHOOK W/  
 FIXED EYE**

- Triple Action Gate
- Aluminum Alloy
- Anodized

A	B	ØC
140 mm	71 mm	23.5 mm

<b>GATE</b>	↻ 12kN
<b>MBS</b>	↔ 30kN ↕ 10kN
<b>WT.</b>	4.7 oz




**USR-40-A**  
**RED BARON**  
**SNAPHOOK W/**  
**FIXED EYE**

- Double Action Gate
- Aluminum Alloy
- Anodized

A	B	ØC	ØD
149 mm	75 mm	22 mm	22.5 mm

<b>MBS</b>	↔ 27kN
<b>WT.</b>	5.0 oz



**USR-145-ABKU**  
**FORGED ALUM.**  
**SNAPHOOK W/**  
**FIXED EYE**

- Double Action Gate
- Aluminum Alloy
- Anodized
- Keylock

A	B	ØC	ØD
141 mm	79 mm	25 mm	20 mm

<b>MBS</b>	↔ 40kN
<b>WT.</b>	4.4 oz



**USR-145S-ABK**  
**FORGED**  
**ALUM. SWIVEL**  
**SNAPHOOK**

- Double Action Gate
- Aluminum Alloy
- Anodized
- Keylock

L	W	GATE Ø
186 mm	72.8 mm	26 mm

<b>MBS</b>	↔ 28kN
<b>WT.</b>	6.5 oz



**KNG-715-BLK**  
**TANGO SAFETY**  
**SNAPHOOK W/**  
**FIXED EYE**


- Double Action Gate
- Aluminum Alloy
- Keylock

L	W	GATE Ø
136 mm	70 mm	26 mm

<b>GATE</b>	↻ 15kN
<b>MBS</b>	↔ 33kN ↕ 10kN
<b>WT.</b>	4.6 oz





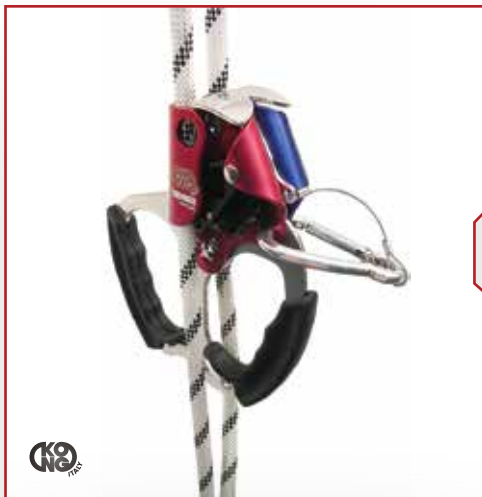

KNG-874-03  
**TRENDER  
ALUM. DOUBLE  
ASCENDER**

- Aluminum Alloy
- Stainless Steel

L  
220.4 mm

**ROPE SIZE** Ø 8 mm to Ø 13 mm  
**WT.** 19.4 oz



KNG-896-S  
**LIFT ASCENDER**

- Aluminum Alloy
- Left-Handed

L  
139 mm

**ROPE SIZE** Ø 8 mm to Ø 13 mm  
**WT.** 7.9 oz



KNG-896-D  
**LIFT ASCENDER**

- Aluminum Alloy
- Right-Handed

L  
139 mm

**ROPE SIZE** Ø 8 mm to Ø 13 mm  
**WT.** 7.9 oz



KNG-876-00S  
**FUTURA HAND  
ASCENDER**

- Aluminum Alloy
- Left-Handed

**ROPE SIZE** Ø 8 mm to Ø 12 mm  
**WT.** 4.4 oz

L  
140 mm





KNG-876-00D  
**FUTURA HAND  
ASCENDER**

- Aluminum Alloy
- Right-Handed

**ROPE SIZE** Ø 8 mm to Ø 12 mm  
**WT.** 4.4 oz


L  
140 mm







ProClimb®



USR-840-AU  
**BIG 8 ALUMINUM  
DESCENDER W/  
EARS**


- Aluminum Alloy
- Anodized

A	B	ØC
170 mm	171 mm	40 mm

<b>ROPE SIZE</b>	Ø 9 mm to Ø 16 mm
<b>MBS</b>	40kN
<b>WT.</b>	9.1 oz



ProClimb®



USR-850-S  
**BIG 8 STAINLESS  
STEEL  
DESCENDER W/  
EARS**


- Stainless Steel

A	B	ØC
170 mm	171 mm	40 mm

<b>ROPE SIZE</b>	Ø 11 mm to Ø 16 mm
<b>MBS</b>	50kN
<b>WT.</b>	26.0 oz



ProClimb®



USR-835-AU  
**ALUMINUM FIGURE  
8 DESCENDER**

- Aluminum Alloy
- Anodized

A	ØB	ØC
145 mm	52 mm	26 mm

<b>ROPE SIZE</b>	Ø 9 mm to Ø 12 mm
<b>MBS</b>	35kN
<b>WT.</b>	4.3 oz



K9

KNG-805-03  
**ALUMINUM  
CLASSIC FIGURE 8  
DESCENDER**

- Aluminum Alloy

L
140 mm

<b>ROPE SIZE</b>	Ø 9 mm to Ø 12 mm
<b>WT.</b>	3.9 oz

NT 271-1  
NT 271-2



**KNG-802  
BACK-UP FALL  
ARRESTER W/  
CARABINER**

- Aluminum Alloy
- Stainless Steel

L  
99.5 mm

**ROPE SIZE** Ø 10 mm to Ø 12 mm  
**WT.** 7.2 oz



**KNG-888  
DUCK MULTIUSE  
BELAY DEVICE**

- Aluminum Alloy


L  
63 mm

**ROPE SIZE** Ø 8 mm to Ø 13 mm  
**TUBULAR SLING SIZE** Ø 10 mm to Ø 15 mm  
**WT.** 2.5 oz



**USR-MRG-200  
ALUMINUM MINI  
ROPE GRAB**

- Fixed Bolt & Nut
- Aluminum Alloy
- Hard Anodized
- Removable Cam



A	B	ØC
42.5 mm	73.6 mm	15.9 mm

**ROPE SIZE** Ø 11 mm to Ø 16 mm  
**WT.** 11.0 oz




**USR-MRG-333  
BETTER GRAB  
REMOVABLE  
ROPE GRAB**

- Stainless Steel Core
- Removable Aluminum Alloy Cam
- Ergonomic, Rubberized Cover
- Large Thumb Rest for Precise Control



A	ØB
71 mm	16 mm

**ROPE SIZE** Ø 7/16" to Ø 5/8"  
**WT.** 8.7 oz

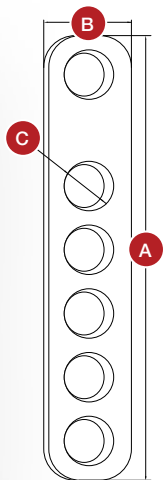


**USR-TP  
ALUMINUM  
TERMINATION  
PLATE**

- ☉ Aluminum Alloy
- ☉ Anodized

A	B	ØC
257.3 mm	50.8 mm	21.8 mm

<b>3-STRAND SIZE</b>	Ø 16 mm to Ø 19 mm
<b>KERMANTLE SIZE</b>	Ø 13 mm to Ø 16 mm
<b>UTS</b>	22kN or 5,000 lbs
<b>WT.</b>	8.8 oz




**USR-FB-DLXR  
DELUXE ALUM.  
UNIBODY FIDDLE  
BLOCK ROPE SET**

- Includes:**
- ☉ 50 ft. of 1/2" Ø Double Braid Rope
  - ☉ 4:1 Mechanical Advantage

A	B	C	D
9-1/2"	5-5/8"	8"	3-7/8"

<b>SHEAVE</b>	Ø 2-5/8"
<b>SHACKLE</b>	5/16"
<b>WLL</b>	1,000 lbs
<b>WT.</b>	35.0 oz

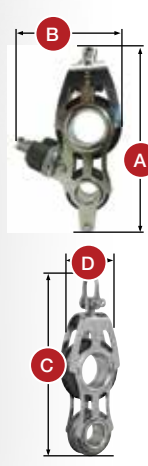

**USR-FB-STDR  
STAINLESS  
STEEL FIDDLE  
BLOCK ROPE SET**


- Includes:**
- ☉ 50 ft. of 1/2" Ø Double Braid Rope

A	B	C	D
8-3/8"	4"	7-3/8"	2-9/16"

<b>SHEAVE</b>	Ø 2-5/8"
<b>SHACKLE</b>	3/16"
<b>WLL</b>	1,000 lbs
<b>WT.</b>	25.0 oz

**USR-FB-DLX  
DELUXE ALUM.  
UNIBODY FIDDLE  
BLOCK SET**

- ☉ 4:1 Mechanical Advantage




<b>SHEAVE</b>	Ø 2-5/8"
<b>SHACKLE</b>	5/16"
<b>WLL</b>	1,000 lbs

A	B	C	D
9-1/2"	5-5/8"	8"	3-7/8"



**USR-FB-STD  
STAINLESS  
STEEL FIDDLE  
BLOCK SET**




<b>SHEAVE</b>	Ø 2-5/8"
<b>SHACKLE</b>	3/16"
<b>WLL</b>	1,000 lbs

A	B	C	D
8-3/8"	4"	7-3/8"	2-9/16"



**USR-PFB-AU**  
**FIXED SIDE MINI PULLEY**

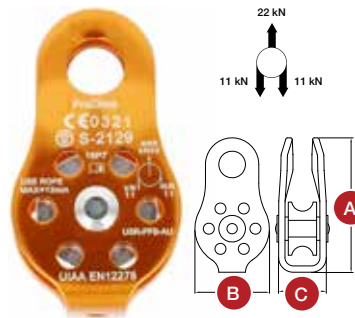


- Single Sheave
- Fixed Side
- Aluminum Alloy
- Anodized

**ROPE SIZE** Up to Ø 13 mm  
**MBS** 5,000 lbs  
**WT.** 3.0 oz

A	B	C
80.5 mm	44 mm	28.6 mm



**USR-PMS-AU**  
**ALUMINUM SWING PULLEY**

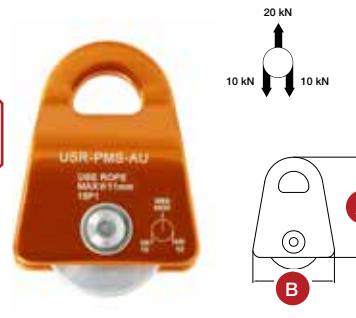

- Single Sheave
- Swing Side
- Aluminum Alloy
- Anodized

**ROPE SIZE** Up to Ø 11 mm  
**MBS** 20 kN  
**WT.** 4.3 oz

A	B
72 mm	58 mm



**KNG-839**  
**ALEY ALUMINUM TREECLIMBING PULLEY**




- Single Sheave
- Swing Side
- Aluminum Alloy
- Taper Bush Lock

**ROPE SIZE** Up to Ø 26 mm  
**LOAD** 50 kN  
**EFFICIENCY** 93%  
**WT.** 40.6 oz

L
236.5 mm



**USR-P16**  
**MICRO PULLEY**




- Single Sheave
- Swing Side
- Aluminum Alloy
- Anodized

**ROPE SIZE** Up to Ø 13 mm  
**MBS** 30 kN  
**WT.** 5.8 oz

A	B
3"	1.5"



**USR-PSW-AU**  
**EXTRA ROLL ALUMINUM PULLEY**

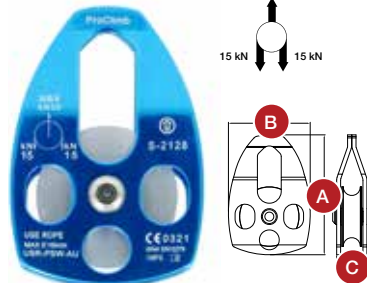

- Single Sheave
- Extra Roll
- Aluminum Alloy
- Anodized

**ROPE SIZE** Up to Ø 16 mm  
**MBS** 30 kN  
**WT.** 8.7 oz

A	B	C
121 mm	82 mm	30.5 mm



**KNG-700-200**  
**FROG CABLE**




- Auto-Closure Gate
- Aluminum Alloy

**MBS** 26kN  
**WT.** 1.8 oz

L	W	GATE Ø
89 mm	51 mm	12.7 mm



**USR-PTW-AU**  
**ALUMINUM SWING SIDE PULLEY**

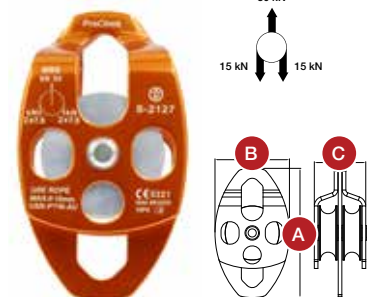

- Twin Sheave
- Swing Side
- Aluminum Alloy
- Anodized

**ROPE SIZE** Up to Ø 16 mm  
**MBS** 30 kN  
**WT.** 14.9 oz

A	B	C
143 mm	82 mm	57 mm



**KNG-761-120B**  
**FROG EXPRESS**



- Auto-Closure Gate
- Aluminum Alloy

**MBS** 22kN  
**WT.** 2.5 oz


Sling L	Frog L	Frog W	GATE Ø
120 mm	86 mm	51 mm	12.7 mm



USR-DSL-AN

**RESCUE SWIVEL**

- Ball Bearing
- Aluminum Alloy
- Anodized



**MBS** ↔ 40kN  
**WT.** 5.6 oz


A	B	C	D
108 mm	61 mm	35 mm	28 mm



USR-DSR


**ALUMINUM EYE-TO-EYE SWIVEL**

- Ball Bearing
- Aluminum Alloy
- Anodized



**MBS** ↔ 5,000 lbs  
**WT.** 3.2 oz

A	B	C	D
83.5 mm	39.2 mm	19 mm	18 mm



A	B	C	D	E
108 mm	55 mm	10 mm	35 mm	28 mm

- Ball Bearing
- Aluminum Alloy
- Anodized

**MBS** ↔ 40kN  
**WT.** 5.6 oz



USR-28-S

**STAINLESS STEEL RIGGING RING**

- Forged Stainless Steel



**MBS** ↔ 24kN  
**WT.** 3.7 oz

Outside Ø	Inside Ø
52 mm	28 mm



USR-46-S

**STAINLESS STEEL RIGGING RING**

- Forged Stainless Steel



**MBS** ↔ 24kN  
**WT.** 5.4 oz

Outside Ø	Inside Ø
70 mm	46 mm



DFB-2004-1

**FORGED STEEL RIGGING RING**

- Forged Alloy Steel
- Zinc Plated

Outside Ø	Inside Ø
102 mm	76 mm

**ULTIMATE LOAD** ↔ 150kN  
**WT.** 10.0 oz

**STS-HR-01**  
**HIGH RISE**  
**ANCHOR STRAP**

- ☉ D-Ring & Loop
- ☉ Nylon Webbing



**WT.** 7.8 oz

L  
4'



ANSI Z359.1-2015  
ANSI Z359.1  
CSA Z259.11-05

**STS-LRND**  
**LOW RISE**  
**ANCHOR STRAP**

- ☉ Loop on Both Ends
- ☉ Nylon Webbing



**WT.** 5.8 oz

L  
4'



**STS-HRND**  
**HIGH RISE**  
**ANCHOR STRAP**

- ☉ Nylon Webbing



**WT.** 5.8 oz

L  
4'



ANSI Z359.1-2015  
ANSI Z359.1  
CSA Z259.11-05

**STS-RC-01**  
**RESIDENTIAL**  
**CHOKER STRAP**

- ☉ D-Ring & Loop
- ☉ Nylon Webbing



**WT.** 7.1 oz

L  
4'



ANSI Z359.1-2015  
ANSI Z359.1  
CSA Z259.11-05

**STS-IS-01**  
**INDUSTRIAL**  
**STRAP**

- ☉ D-Ring on Both Ends
- ☉ Nylon Webbing



L  
4'



CSA Z259.11-05

**STS-RCND**  
**RESIDENTIAL**  
**CHOKER STRAP**

- ☉ Loop on Both Ends
- ☉ Nylon Webbing



**WT.** 5.8 oz

L  
4'



ANSI Z359.1-2015  
ANSI Z359.1  
CSA Z259.11-05

**STS-LR-01**  
**LOW RISE STRAP**

- ☉ D-Ring & Loop
- ☉ Nylon Webbing



**WT.** 7.8 oz

L  
4'



**STS-RR-01**  
**ROOFING &**  
**ANCHOR STRAP**

- ☉ D-Ring
- ☉ Nylon Webbing



**WT.** 7.8 oz

L  
2'





KNG-810-1

- Rubber
- Universal Size

**FAST-RUBBER  
ROPE FASTENER**

<b>CARABINER SIZE</b>	Body Ø 8 to 11 mm
<b>COLOR</b>	Black
<b>WT.</b>	0.1 oz



KNG-813

- Nylon
- Universal Size

**FAST-NYLON  
ROPE FASTENER**

<b>CARABINER SIZE</b>	Body Ø 8 to 11 mm
<b>COLOR</b>	Yellow



KNG-810-08

- Stainless Steel
- Reusable

**FAST-INOX  
RETAINER CLIP**

<b>CARABINER SIZE</b>	Body Ø 8 mm
-----------------------	-------------



KNG-810-12

- Stainless Steel
- Reusable

**FAST-INOX  
RETAINER CLIP**

<b>CARABINER SIZE</b>	Body Ø 12 mm
-----------------------	--------------





## PRODUCT INDEX

### A

A4N	Boom Truck Rope	25
-----	-----------------	----

### C

CHF-EXT	Removable Extreme	28
CHF-REM	Removable Chafe Gear	27
CHF-TUB	Tubular Chafe Gear	26

### D

DFB-2004-1	Forged Steel Rigging Ring	53
------------	---------------------------	----

### K

KAA-60-08	Tool Accessory Carabiner	41
KNG-265	Paddle Carabiner	41
KNG-411-L1	XL Carbon Steel Carabiner	36
KNG-411-OZ	XL Steel Carabiner	35
KNG-411-SN	XL Carbon Steel Carabiner	35
KNG-411-TZ	XL Steel Carabiner	34
KNG-412-L1	Ovalone Carbon Steel Carabiner	36
KNG-412-OZ	Ovalone Carabiner	35
KNG-412-TZ	Ovalone Carabiner	34
KNG-462-C1	Classic Oval Steel Carabiner	36
KNG-511-L3	XL Inox Rescue Steel Carabiner	36
KNG-511-SN	XL Inox Steel Carabiner	35
KNG-567-10	Cross Bar Carabiner	36
KNG-700-200	Frog Cable	52
KNG-710	Oval Aluminum Carabiner	41
KNG-712-SN	Ovalone Aluminum Carabiner	39
KNG-713	Guide Carabiner	41
KNG-715-BLK	Tango Safety Snaphook w/ Fixed Eye	47
KNG-730-A1	Oval Classic Carabiner	39
KNG-733-A1	Guide Carabiner	40
KNG-751	Mini D Carabiner	41
KNG-761-12OB	Frog Express	52
KNG-778-A1	Ferrata Carabiner	40
KNG-778-G1	Ferrata Express Carabiner	40
KNG-778-SN	Ferrata Carabiner	39
KNG-786-A1	HMS Pear Carabiner	40
KNG-786-SN	HMS Pear Carabiner	38
KNG-802	Back-Up Fall Arrester w/ Carabiner	50
KNG-805-03	Aluminum Classic Figure 8 Descender	49
KNG-810-08	Fast-Inox Retainer Clip	55
KNG-810-1	Fast-Rubber Rope Fastener	55
KNG-810-12	Fast-Inox Retainer Clip	55
KNG-813	Fast-Nylon Rope Fastener	55
KNG-839	Alby Aluminum Tree Climbing Block	52
KNG-874-03	Trender Aluminum Double Ascender	48
KNG-876-00D	Futura Right-Hand Ascender	48
KNG-876-00S	Futura Left-Hand Ascender	48
KNG-888	Duck Multiuse Belay Device	50
KNG-896-D	Lift Ascender - Right	48
KNG-896-S	Lift Ascender - Left	48

KNG-901	Paddle Carabiner	41
KNG-911-A1	XL Aluminum Rescue Carabiner	40
KNG-911-SN	XL Aluminum Rescue Carabiner	39

### L

LY3KM	Better Grab 3 Positioning Lanyard	20
LYKKM	E-Z Move Positioning Lanyard	19
LYKM-162	Better Grab Positioning Lanyard	18
LYSE	Technora Prusik Lanyard	17
LYTP	Vertical Life Line	23
LYTPD	3 Strand Composite Vertical Life Line	24
LYTPD	Adjustable Positioning Lanyard	22
LYTPD	Restraint & Positioning Lanyard	21

### N

NY	3 Strand Nylon	15
----	----------------	----

### P

PD	3 Strand Composite	14
PE	3 Strand Polyester	16

### R

RB-12x18-BLACK	Rope Bag	31
ROPE*CUTTR	Electric Hot Knife	30
ROPE*METER	Rope Counter	29

### S

STS-HR-01	High Rise Anchor Strap	54
STS-HRND	High Rise Anchor Strap	54
STS-IS-01	Industrial Strap	54
STS-LR-01	Low Rise Strap	54
STS-LRND	Low Rise Strap	54
STS-RC-01	Residential Choker Strap	54
STS-RCND	Residential Choker Strap	54
STS-RR-01	Roofing & Anchor Strap	54

### U

USR-01-CF07	Steel Snaphook w/ Fixed Eye	42
USR-01-CF09	Forged Steel Snaphook w/ Fixed Eye	42
USR-01-CF09B	Steel Snaphook	42
USR-01-CFE	Steel Spreader Snaphook w/ Fixed Eye	44
USR-02-CS07	Forged Steel Swivel Snaphook	42
USR-02-CS09B	Forged Steel Swivel Snaphook	43
USR-02-CSE	Forged Steel Swivel Snaphook	44
USR-04-C09B	Forged Scaffold Ladder Hook w/ Cap. Pin	33
USR-107-A3TU	Aluminum Big D Carabiner	38
USR-109BL	Micro 900 Carabiner	41
USR-109G	Micro 900 Carabiner	41

USR-109P	Micro 900 Carabiner	40	USR-DSL-A	Forged Aluminum Eye-to-Eye Swivel	53
USR-117-ATL	Modified D Aluminum Carabiner	37	USR-DSL-AN	Rescue Swivel	53
USR-121-ABUU	HMS Aluminum Carabiner	40	USR-DSR	Aluminum Eye-to-Eye Swivel	53
USR-125-A3TU	Forged HMS Carabiner	39	USR-FB-DLX	Deluxe Alum. Unibody Fiddle Block Set	51
USR-127-A3TU	True Oval Aluminum Carabiner	39	USR-FB-DLXR	Deluxe Alum. Unibody Fiddle Block Set	51
USR-127-AU	True Oval Aluminum Carabiner	40	USR-FB-STD	Stainless Steel Fiddle Block Set	51
USR-128-A3TU	Copper Head Carabiner	38	USR-FB-STD R	Stainless Steel Fiddle Block Set	51
USR-12-ATL	HMS Aluminum Carabiner	37	USR-LDR-A	Aluminum Ladder Hook w/ Fixed Eye	46
USR-12-CTL	Klettersteig Steel Carabiner	32	USR-MRG-200	Aluminum Mini Rope Grab	50
USR-12-CTLD	Equal D Steel Carabiner	32	USR-MRG-333	Better Grab Removable Rope Grab	50
USR-12-CTLM	Modified D Steel Carabiner	32	USR-P16	Micro Pulley	52
USR-12-CTLM-BK	Modified D Steel Carabiner	32	USR-PFB-AU	Fixed Side Mini Pulley	52
USR-12D-ATLY	Aluminum Alloy Carabiner	37	USR-PMS-AU	Aluminum Swing Pulley	52
USR-140-A3TU	Aluminum Carabiner w/ Fixed Eye	39	USR-PSW-AU	Extra Roll Aluminum Pulley	52
USR-143-ABK	Aluminum Safety Snaphook w/ Fixed Eye	46	USR-PTW-AU	Aluminum Swing Side Pulley	52
USR-143-ABU	Aluminum Safety Snaphook w/ Fixed Eye	46	USR-TP	Aluminum Termination Plate	51
USR-143-ARD	Aluminum Safety Snaphook w/ Fixed Eye	46			
USR-145-ABKU	Forged Aluminum Snaphook w/ Fixed Eye	47			
USR-145S-ABK	Forged Aluminum Swivel Snaphook	47			
USR-14-A9Y	Aluminum Carabiner w/ Fixed Eye	37			
USR-14-ATL	Modified D Rescue Carabiner	37			
USR-14-ATL9	Forged Aluminum Carabiner w/ Fixed Eye	37			
USR-14-C3T	Forged Steel Carabiner	35			
USR-14-C9Y	Fixed Eye Steel Carabiner	33			
USR-16-CDL	Forged Steel Spreader Snaphook	44			
USR-16S-CDL	Steel Spreader Snaphook - Economy	44			
USR-19-A3T	I-Beamer Carabiner Lite	38			
USR-19-A3TU	I-Beamer Carabiner	38			
USR-19-AT9	I-Beamer Carabiner	37			
USR-19-ATL	I-Beamer Carabiner Lite	38			
USR-221-A3TU	Aluminum Swivel Carabiner	39			
USR-28-S	Stainless Steel Rigging Ring	53			
USR-40-A	Red Baron Snaphook w/ Fixed Eye	47			
USR-46-S	Stainless Steel Rigging Ring	53			
USR-50-AB	Forged Aluminum Snaphook w/ Fixed Eye	45			
USR-50-ABK	Forged Aluminum Snaphook w/ Fixed Eye	45			
USR-50-AR	Forged Aluminum Snaphook w/ Fixed Eye	45			
USR-59-AY	Forged Aluminum Snaphook	45			
USR-67	Modified D Carabiner w/ Captive Pin	36			
USR-71-C09A	Steel Ladder Hook w/ Captive Pin	33			
USR-71-C09B	Steel Ladder Hook w/ Captive Pin	35			
USR-71-CTL	Fire Fighter Hook w/ Captive Pin	34			
USR-71-CTS	Steel Ladder Hook w/ Captive Pin	36			
USR-71-CTSB	Steel Ladder Hook w/ Captive Pin	36			
USR-71N-C09A	Steel Ladder Hook w/ Captive Pin	33			
USR-71N-C09AB	Steel Ladder Hook w/ Captive Pin	33			
USR-835-AU	Aluminum Figure 8 Descender	49			
USR-840-AU	Big 8 Aluminum Descender w/ Ears	49			
USR-850-S	Big 8 Stainless Steel Descender w/ Ears	49			
USR-98-C09A	Large D Steel Carabiner	34			
USR-98-C09AB	Large D Steel Carabiner	34			
USR-98-C09S	Large D Steel Carabiner	35			
USR-98-C09SB	Large D Steel Carabiner	35			
USR-98-C09T	Large D Steel Carabiner	34			
USR-98-C09TB	Large D Steel Carabiner	34			
USR-BRHA-9Y	Aluminum Rebar Hook w/ Fixed Eye	45			
USR-BRH-C09	Forged Steel Rebar Hook w/ Fixed Eye	43			
USR-BRH-C09B	Forged Steel Rebar Hook w/ Fixed Eye	43			
USR-BRH-SC09	Steel Swivel Ladder Hook	43			


---

**#**

---

1S	Accessory Cord	13
1S-T	Technora Prusik Line	12
1WPP	Static Master Pro	6
2KK / 2KP	Firesheild-K	7
2TT / 2TP	Firesheild-T	7
2WP	Static Master	4
2WP2	Static Master II	5
2WP24	Escape Rope	8
3P	Water Rescue Rope	9
3PN	NFPA Throwline	10
3Q	Swift Water Rescue Rope	11

# WHO WE ARE



**U.S. Rigging Supply is a certified ISO 9001:2015 standard company. We are a United States leading producer of custom designed cable and wire rope assemblies.**

We keep people safe one product at a time. U.S. Rigging Supply is a manufacturer and master distributor of industrial fittings and fall protection equipment located in Santa Ana, California. For more than 40 years, we've grown through our focus on innovation, quality, dependability, and unmatched customer service. We're a trusted partner for rope and rigging products that ensures the success and safety of our customers. We provide the tools and equipment necessary in a variety of industries including professional climbers like arborists and tower dogs, marine, rescue operations, construction and more. We distribute fall protection gear, hand tools, work equipment, architectural railing, lifting and rigging equipment, synthetic rope, and other comparable products for industrial and commercial use.



## PELICAN ROPE

The Most Trusted Name In Rope®

**Pelican Rope is an ISO 9001:2015 certified manufacturer of high performance synthetic and specialty rope products, rope lanyards, slings and custom rope assemblies.**

For over 40 years our devotion to innovation, quality and customer service has yielded a diverse UL Certified product line designed to not only meet or exceed the standards established by the Cordage Institute, the U.S. Military, ASTM and NFPA but more importantly, the expectations of our loyal customers in the commercial, industrial, arborist, fire and rescue, law enforcement, manufacturing and marine industries. Dependability is our hallmark; exceptional value our everyday standard.



**WARNING:** Some products in this catalog can expose you to chemicals known to the State of California to cause cancer and/or birth defects or other reproductive harm.

For more information go to: [www.p65warnings.ca.gov/product](http://www.p65warnings.ca.gov/product).

**PLEASE NOTE:** The contents of this catalog may not be used or copied even in part without quoting the source and without written permission from U.S. Rigging Supply Inc. All rights reserved. As specifications, design, production and techniques are in continuous development, this catalog should not be regarded as an infallible guide. All data, colors of products and technical specifications given may be subject to change and improvement without warning or notice. Please visit our website [www.usrigging.com](http://www.usrigging.com) as it is constantly updated and/or corrected.

## MILLIMETERS TO INCHES CONVERSION CHART

MM.	IN.	MM.	IN.	MM.	IN.	MM.	IN.	MM.	IN.
1	0.0394	11	0.4331	21	0.8268	31	1.2205	41	1.6142
2	0.0787	12	0.4724	22	0.8661	32	1.2598	42	1.6535
3	0.1181	13	0.5118	23	0.9055	33	1.2992	43	1.6929
4	0.1575	14	0.5512	24	0.9449	34	1.3386	44	1.7323
5	0.1969	15	0.5906	25	0.9843	35	1.3780	45	1.7717
6	0.2362	16	0.6299	26	1.0236	36	1.4173	46	1.8110
7	0.2756	17	0.6693	27	1.0630	37	1.4567	47	1.8504
8	0.3150	18	0.7087	28	1.1024	38	1.4961	48	1.8898
9	0.3543	19	0.7480	29	1.1417	39	1.5354	49	1.9291
10	0.3937	20	0.7874	30	1.1811	40	1.5748	50	1.9685



**U.S. RIGGING**  
SUPPLY  
*Powered by service. Driven by quality.*



**Pelican Rope**  
The Most Trusted Name in Rope

**REGISTERED TRADEMARK NOTICES:**

ANSI® is a registered trademark of the American National Standards Institute.

Dyneema® is a registered trademark of Royal DSM N.V.

Kevlar® and KevlarAP® are registered trademarks of E.I. du Pont de Nemours and Company.

NFPA® is a registered trademark of the National Fire Protection Association.

OSHA® is a registered trademark of the Occupational Safety and Health Administration.

ProClimb® is a registered trademark of US Rigging Supply Inc.

Spectra® is a registered trademark of Honeywell Int'l Inc.

Technora® is a registered trademark of Teijin, Ltd.

UL® and the UL LLC logo are registered trademarks of UL LLC.

Specifications and availability subject to change.

1600 East McFadden Avenue  
Santa Ana, California 92705

(866) 490-7444

