





43 inch Outdoor Portable TV Display


NEW
DLI961
PREMIUM DENIM
TRUE REL
BOARD JEAN
J BRA
for all ma
Black Or
Pepe Je
LONDON



-  IP65
-  Maximum 30 Hours running time
-  Android
-  Built-in Wifi
-  1500cd/m2
-  Tempered glass
-  Lock
-  Anti-uv
-  Menu
- PnP** Plug and paly

Fully Portable

Foldable design with two big stable wheels making the display at anywhere at any time

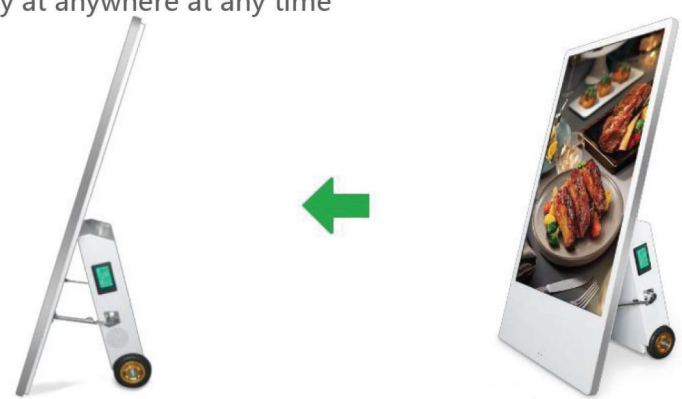

Lock

Special Lock making secure and easy maintain.



Features

IP65

The new IP65 outdoor enclosure design will keep the screen and the Inside components more secure for all kinds of the extreme weather



Protection from the weather!



Long Run

More than 24 hours indoor running will keep the more valuable for the commercial display



1500cd/m2 IPS

400 nits-15000 nits range making the display can be readable even Facing the Sunlight



Conventional Signage Display



Outdoor Digital Android Battery A-Boards



Plug and play (Cloud-XDS)


(MPG, AVI, MP4, RM, RMVB, TS), (MP3, WMA), (JPG, GIF, BMP, PNG),

videos images music h5




Power

Liquid panel displays the real time dump energy

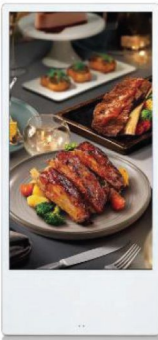

Aluminum alloy frame with Metal Water proof enclosure



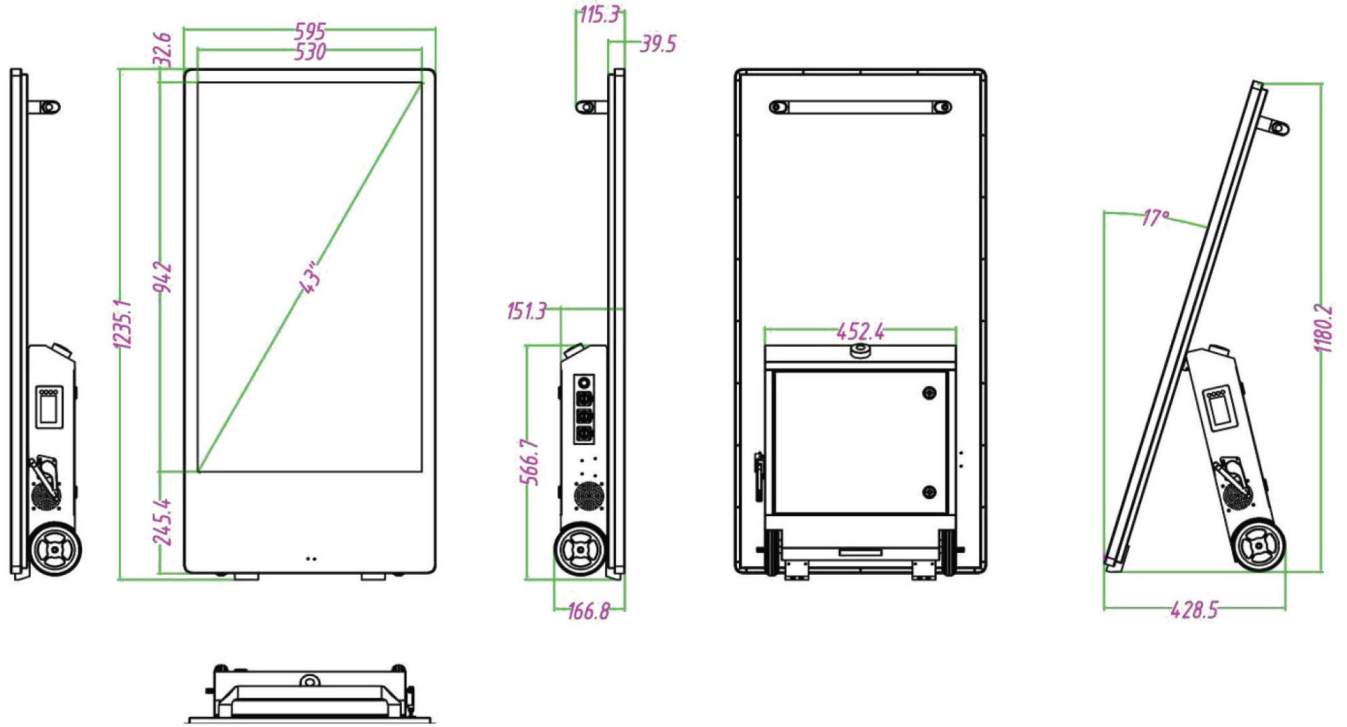

Item	43 inch	
Screen	Resolutions	1080x1920 (FHD)
	Visible Area (mm)	940.896(H)x 529.254(V)
	Ratio	9:16
	Brightness (cd/m ²)	400-1500
	Color	16.7M
	Visible angle	178°
	Contrast	4000:1
System	Media	Video (MPG, AVI, MP4, RM, RMVB, TS), Audio (MP3, WMA), Image(JPG, GIF, BMP, PNG)
	Output	1080x1920 ;
	CPU	RK3288
	RAM	2GB
	ROM	16GB
	USB	USB2.0 HOST (x2)
	LAN	10/100M Ethernet
	Wi-Fi	802.1 1b/g/n
	System	Android 7.1 (Android 11 is optional)
	Speaker	8Ω 5W x2
Battery	Battery	Polymer lithium
	Charging	7-8 hours
	Duration	Indoor 30 hours (400nits-450nits) ; Outdoor 8hours (1000nits-1500nits)
	Capacity	43000mAh
	Voltage	25.2V
	Power	28W-110W /

Size	Product (WxHxD mm)	1235.1x595x151.3	
	Package(LxWxHmm)	1360x285x720	
	Net weight(kg)	41.67kg	
	Gross weight(kg)	50.1kg	
Operation	Use	-20 °C to 70 °C	High temperature resistant screen optional(Up to 105°C)
	Storage	-30 °C to 80 °C	
	Humidity-use	10% to 80%	
	Humidity--Storage	5% to 95%	
Accessories	Including	Remote, Manual , Power adapter	



NEW

