

## 55 inch Indoor Floor Standing Digital Signage

**Product Image**






**Product size**


1960\*747\*21 | \* w \* t (mm)

**Application Pictures**



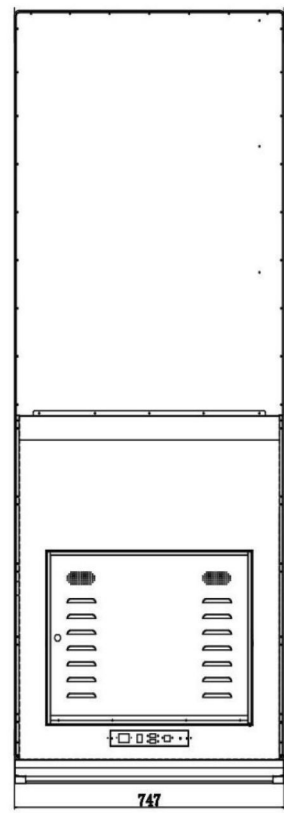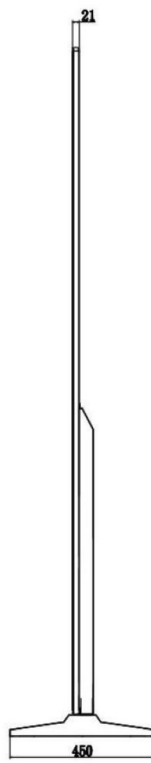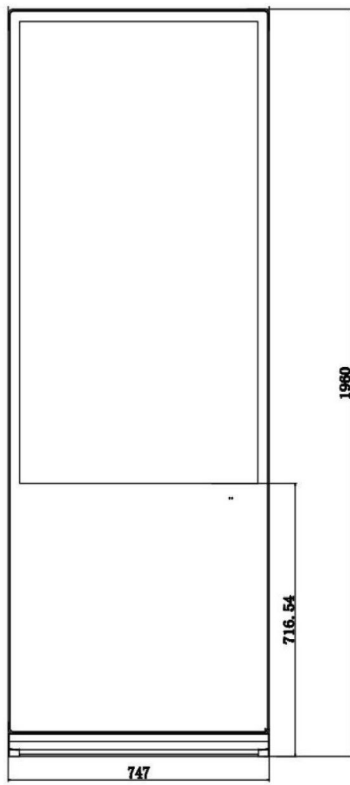

<p><b>Product characteristics</b></p>	<p>3d digital filter noise reduction, line-by-line scanning, the screen is true and delicate;          Smart screen protection function, prevent Burns;          Various high definition signal interface, strong compatibility;          Intelligent backlight brightness control, improve the visual effect of image, save energy and save electricity;          The intelligent temperature control cooling / heating system ensures the machine to work stably in the best environment.</p>
<p><b>Playback system</b></p>	<p>Each playing area can be arranged and layered freely, and can be played on horizontal and vertical screens;          Screen Area Free Segmentation, composable picture, audio, video, web page, clock, date, caption, mixed material editing;          Support Program and broadcast table preview, real-time monitoring playback screen, multi-stage timing switch settings, automatic reset;          Different users can set different permissions;          Adopt distributed management, support remote or local control;          Supports a variety of general audio / Video, and office documents;          Support cable, Wifi, 4G network optional.</p>
<p><b>Product name</b></p>	<p><b>Specification parameter</b></p>
<p><b>Display screen</b></p>	<p>LCD: 55 Inch          Display Area: 1210 * 680          Brightness: 350 CD/M2          Vertical: 178          Backlight: LED backlight</p> <p>TFT SCREEN RATIO: 16:9      Resolution: 1920 * 1080          Point Distance: 0.63 * 0.63      Contrast: 1400:1          Response Time: 6ms      Angle: Horizontal /</p>
<p><b>Motherboard scheme</b></p>	<p>MOTHERBOARD: RK3288 quad-core, 2.0          Ghz Ram: 2 GB          BUILT-IN STORAGE: EMMC 16G      Operating system: Android 7.1</p>

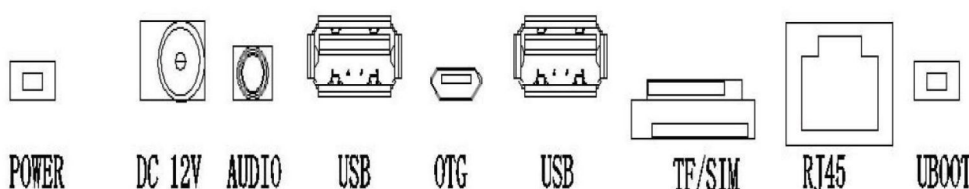Android interface		
Accessories	Manual, remote control, warranty card, certificate of conformity, Power Cord	
Product structure	Product architecture	Hardware shell + lacquer process + aluminum alloy border
	Installation mode	Floor type
	Protective Glass	4 mm toughened glass
	Weight	57kg
	Product size	1960*747*21 (mm)
	Packing size	2008*840*158 (mm)
Operating parameter	Working Environment	Working Temperature: 0 ° C to + 50 ° C working humidity: 5% to 90%
	Power supply	AC110~240V
	Power	115W